



All Season PU Foam Gun Type

www.gnspufoamsealant.com

The GNS® All Season PU Foam Gun Type W33 is a one component aerosol polyurethane foam, special designed for winter season with applications at temperature as low as -18°C. It is fitted with a plastic adapted head for use with a foam application gun. Also All Season PU Foam has very good for filling and sealing with excellent mounting capacities, high thermal and acoustical insulation. Mainly used for installation, fixing and insulation of door and window frames; filling and sealing of gaps, joints, openings and cavities.

GNS is a leading China GNS® All Season PU Foam Gun Type manufacturer, supplier and exporter. Adhering to the pursuit of perfect quality of products, so that our All Season PU Foam Gun Type have been satisfied by many customers. Sincerely look forward to cooperating with you in the near future.

1.PRODUCT FEATURE OF GNS® ALL SEASON PU FOAM GUN TYPE

•Excellent adhesion to a wide variety of surfaces such as UPVC, masonry, brick, block work, glass, steel, aluminum, timber and other substrates (except PP, PE and Teflon);

- •High thermal and acoustical insulation;
- •Very good filling capacities;
- •Does Not slump at low temperature;
- •Application temperature between -18 $^{\circ}$ C to +35 $^{\circ}$ C;
- •It contains CFC-free propellants which are harmless to the ozone layer.









STABLE FOAM QUALITY

- Pre-expansion
- Good adhesion
- Smooth cell density
- No shrinkage

BETTER INSULATION FACTOR

- Cold insulation
- Sound insulation
- Heat preservation







WINTER PU FOAM

- Can be used at + 35 °C to 18 °C
- Fast cured in lowtemperature



Gun Type



Straw Type



2.PERFORMANCE DATA OF GNS® ALL SEASON PU FOAM GUN TYPE

Base Consistency Curing System Tack-Free Time (min) Drying Time Cutting Time (min) Yield (L) Polyurethane Stable Foam Moisture-cure 5~6 Dust-free after 10-12 min. 30~40 60

Tel:+86-20-84267539



Shrink	None
Cellular Structure	>90% closed cells
Specific Gravity (kg/m³)	13
Temperature Resistance	-50℃~+80℃
Application Temperature Range +18 $^\circ C$ ~+30 $^\circ C$	
Colour	White
Fire Class (DIN 4102)	B3
Insulation Factor (Mw/m.k)	0.036
Compressive Strength (kPa)	110
Tensile Strength (kPa)	140
Adhesive Strengh(kPa)	120
Water Absorption (ML)	0.5~2(no epidermis) <0.5(with epidermis)

3. APPLICATIONS AREAS OF ALL SEASON PU FOAM GUN TYPE


- •Installing, fixing and insulating of door and window frames;
- •Filling and sealing of gaps, joint and openings;
- •Connecting of insulation materials and roof construction;
- •Bonding and mounting;
- •Insulating the electrical outlets and water pipes;
- •Heat preservation, cold and sound insulation;
- •Packaging purpose, wrap the precious & fragile commodity, shake-proof and anti-pressure.



PRODUCT APPLICATION RANGE



Installation of door and window frames

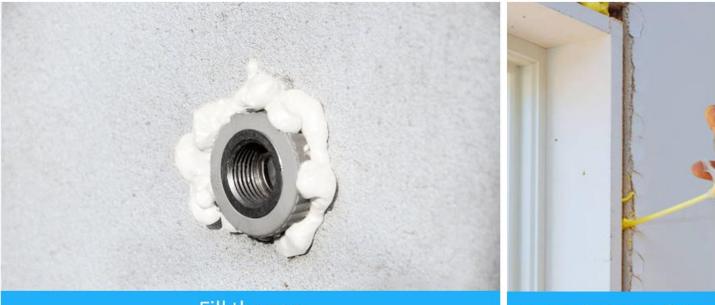

Fill the gap


Door and window fixing





4.APPLICATION INSTRUCTIONS OF ALL SEASON PU FOAM GUN TYPE














5.STORAGE AND SHELF LIFE OF ALL SEASON PU FOAM GUN TYPE

12 months in unopened packing store in temperature between $+5^{\circ}$ C to $+25^{\circ}$ C, Keep in cool, shade and well ventilated area. Always keep the can with the valve pointed upwards.

6.PACKING, SHIPPING AND SERVING OF ALL SEASON PU FOAM GUN TYPE

Packing: 750ml 500ml 300ml, 12 cans/carton. (For special specifications, please contact us.) Shipping: Sea or land transportation

Serving: We provide free design service, and you'll get excellent after-sales service, we committed to solving any problems that may occur when you use our products.











COMPANY PROFILE

- The biggest PU foam manufacturer in Asia
- 19 years export experience
- Sold to 77 countries and areas
- Equipped with 32 advanced full-automatic production line
- 55% market share in China
- Accredited to all kinds certificates





7.FAQ

Q: Why does the PU foam not work well when the weather is extremely cold?

A: Generally, the best application temperature of PU foam is between +18 $^{\circ}$ C to +30 $^{\circ}$ C, if the temperature is too low, it will be affected.

Q: What factors cause the bad cell?



A: It 's about the application temperature, insufficient humidity and the quality of the product itself.



www.gnspufoamsealant.com