




PRODUCT INFORMATION

Packing list in	Quantity
Moisture proof Lamp LEDS 30PCS	1X
 Φ6 Plastic expansion	2X
 3x30 Screw	2X
 4x16 Y type Stainless Screw	2X

IP 44


LED as a modern light source has become the development trend in the lighting industry with the characteristics of high efficiency, long life expectancy and relatively low energy consumption. How to use it reasonably and efficiently is the key issue in the lighting industry. PD-PIR2016 are designed with 30 LEDs (0.45W). Its reasonable layout makes heat flow even and achieve the most optimized luminous efficiency. And a 6W LED lamp can generate almost the same brightness when compared to using a 100W resistor type Incandescent Lamp. Its life time is 100 times longer than ordinary halogen lamps. It can work with human sensor switch which makes it more energy saving and secure with the light turning on when one comes in and turning off when one goes out. LED lamps are an ideal light turning on when one comes in and turning off when one goes out. They are also an ideal substitute as an energy saving light source.

SPECIFICATIONS



Power source: 220-240V/AC ☐
100-130V/AC ☐
Power frequency: 50/60Hz
Detection range: 8±2m Max(22°C)
Detection angle: 120°
Time setting: min:7sec±3sec
max:6min±2min(adjustable)
Light-control: <5LUX~2000LUX(adjustable)

LED quantity: 30PCS
Standby power: 0.45W
LED specifications: T5050
Rated load: 6W Max.
Luminous flux: 367lm
Installation height: 1.5m~3m
Working temperature: -10°C ~ +40°C
Working humidity: <95%RH

SENSOR INFORMATION




8±2m
Correct moving orientation

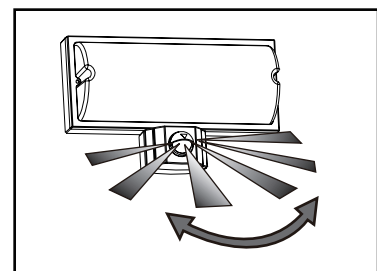



120°
Detection angle

SPECTROGRAM

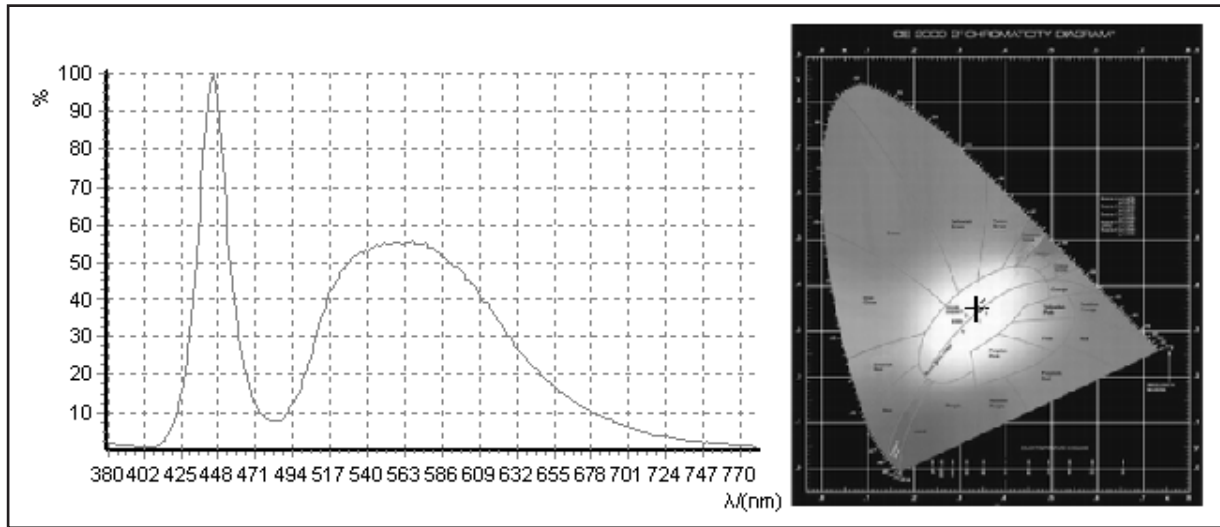

THE NAMES OF EACH PART

(LAMP SHELL FOR ALUMINUM MATERIAL)

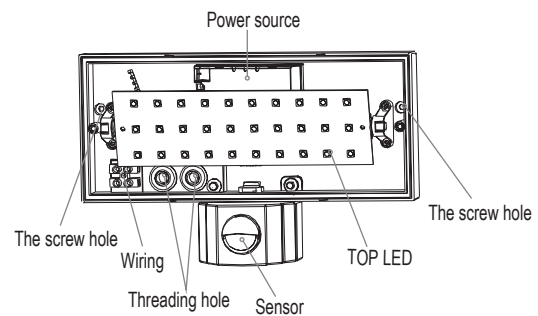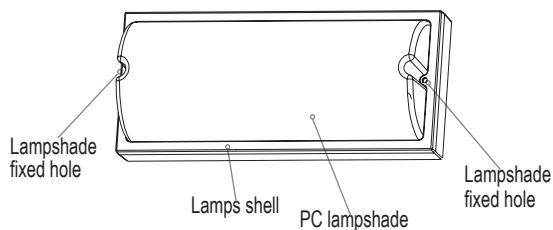


Installation


Note: Please bring the following tools.




Pencil



Electric drill



Hammer



Screwdriver



Warning!

1. Please keep it away from the children.
2. This product can be installed for outdoor, but we suggest that against the rain/storm & High lights.

➤ Step1 Mark the hole position with a pencil after determining where you want to install the product.(as Fig.1)





Fig.1

Note: If it is a wooden wall, there is no need to use plastic expansion screw, just fasten the screw with the screwdriver.

- Step2 Drill holes on the walls where there is pencil mark with an electric drill and get the plastic expansion inside the hole. (as Fig.2)
- Step3 Connect the cable to the lamp through the cable entry openings (as Fig.3)

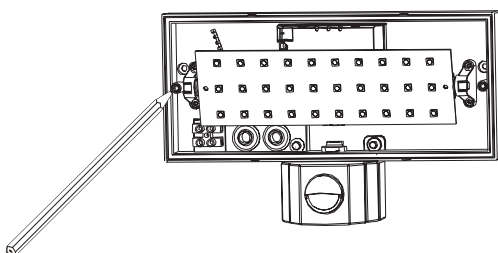

Warning!

Please confirm when shut off the power cord access.

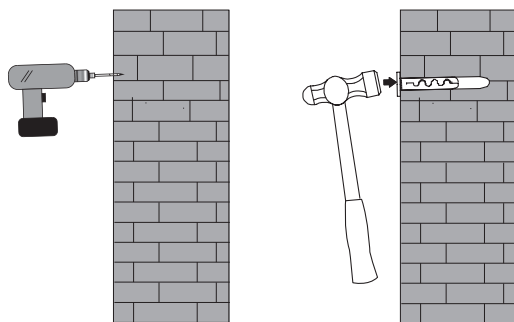


Fig.2

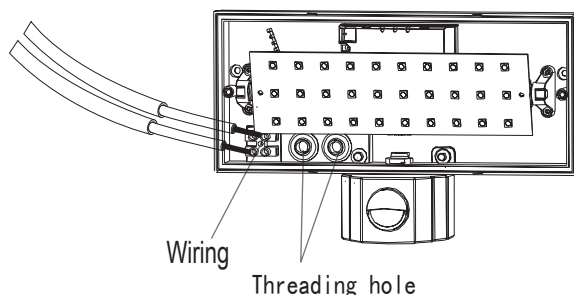


Fig.3

- Step4 If it is a wooden wall, there is no need to use plastic expansion, just drive the screw with the screwdriver. (Fig.4a)
- If it is not a wooden wall, please refer to step 2. (as Fig.4b)

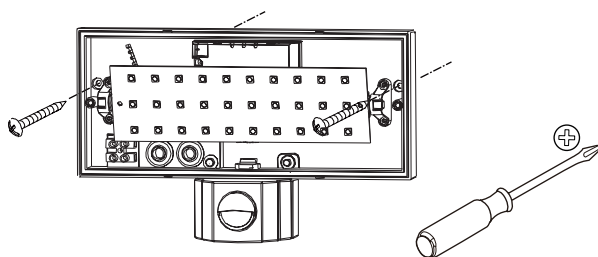


Fig.4a

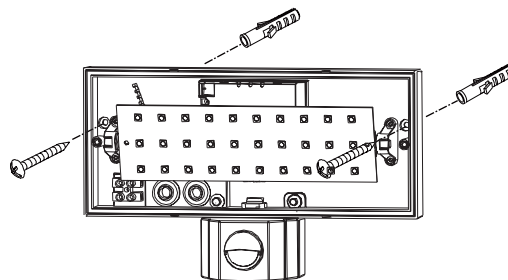


Fig.4b

- Step5 Fasten the cover to the lamp base which has been installed on the wall. (Fig.5)
- Step6 Open the cover of the control panel downwards, and set the control knobs, and then the control panel upwards. (as Fig.6)

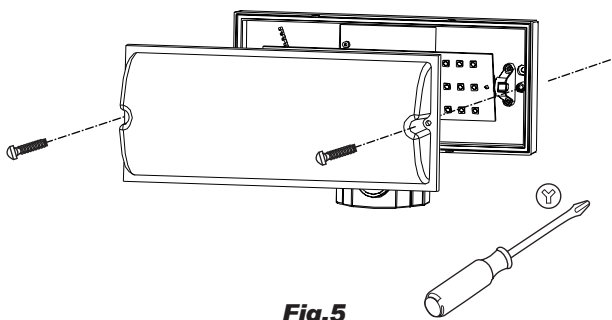


Fig.5

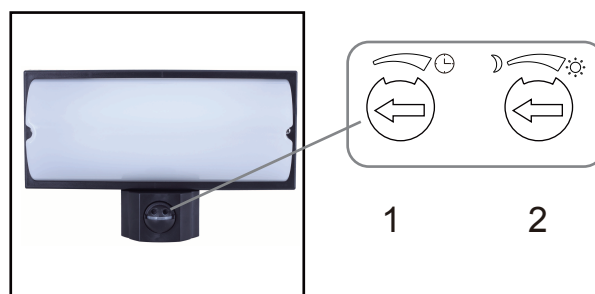



Fig.6



1

It can be set at the range of 4 second (counterclockwise rotation to the end) to 8 minute (clockwise rotation to the end). The timer will recount when the sensor detect a moving signal before the end of the last time, so we advise that you'd better set the time to minimum when you make the detection range testing or the walking testing.

Note: The sensor need to wait 1second to re-work after the light going off. Only after the end of the time, the light will lighten again when detecting the signal.



Work illumination value can be adjusted in the range of 5 ~ 2000LUX illumination value is about 5LUX when counterclockwise rotation to the end, illumination value is about 2000LUX when clockwise rotation to the end. The knob should be rotated counterclockwise to the end when making the walking test or adjusting the detection range during the day.

Note: Do not force too much when adjusting the three knobs because they are assembled directly on the component! There is a small limiting device in the component, which will be broken if you force too when the knob is rotated to the end. If it happens, the knobs will be rotated 360° without the device limiting. Please notice that the limited adjusting angle of the knobs is 270°.

THE NAMES OF EACH PART

Fault	Failure cause	Solution
	Light-illumination set incorrectly, the load is broken	Adjust the setting of the load
Does not work with the load	The power is off	Change the load
	There is a continuous signal in the region of the detection	Turn the power on
Work all the time with the load	The sensor have not been installed correctly	Check the settings of the detection area
	Sensors failed to pack good cause its cannot reliably detect signal	Re-install the outer covering
Work with the load	Moving signal is detected by the sensor (movement behind the wall, the movement of small objects, etc.)	Check the settings of the detection area
When there is a moving signal work with the load	The moving body is too fast or the detection area is too small	Check the settings of the detection area

Warning!

- 1.The LEDS in serial can function when all the seals installed in place.
- 2.Please don't remove or connect with other lamp when powered on.
- 3.When the LEDS in serial are damaged ,you need experienced technician to repair using the same rating LEDS.

Please confirm with profession installation.

Please cut off power supply before installation and removal operations.

Make sure that you have cut off the power for safety purposes.

Improper operation caused losses, the manufacturer does not undertake any responsibility.

The screws used on the light case are common ones when sent out from the factory.The specific Y type stainless screws in the plastic bag for screws are used for fixing the lampshade after the technician has finished the installation.It is for protecting against the electric shock.

Ningbo Pdlux Electronic Technology CO.,Ltd

Add: 17F,Commerce Building of NingBo,
No 588, South Tiantong Rode,Yinzhou District,Ningbo, China

Tel: 86-574-83008608(20 lines) Fax: 86-574-83008609
Email: pdlux@pdlux.com Web: www.pdlux.com