


## Infrared Thermometer User Guide

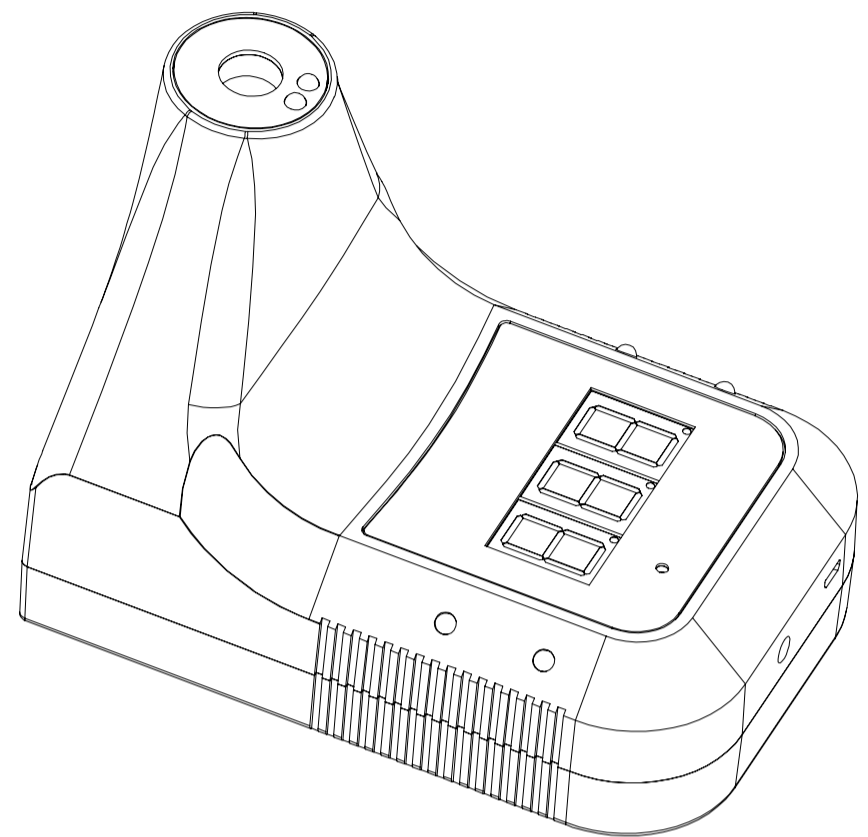

**Model: K3**

(2) Mode: Long press mode switch hole for 3 seconds to switch the temperature measurement mode (Sur: surface mode, bod: object mode, Cou: counting mode)



Fig. 11





Fig. 12




Fig. 13

### 3. Install and replace battery


- (1) Remove three screws
- (2) Open the back base and install 18650 Li battery




### 4. Install method



1.Nail hook



2.Bracket fixing




3.Double-sided adhesive sticking

Shenzhen Qiangwei Electronic Co., Ltd


Add: 4F, Building 3, Xialingpai Industrial Zone, Dalang Subdistrict, Longhua District, Shenzhen, China  
Email: Qwdz.aftersales@gmail.com




## 1.Introduction



Tripod mounting hole USB interface



Switch

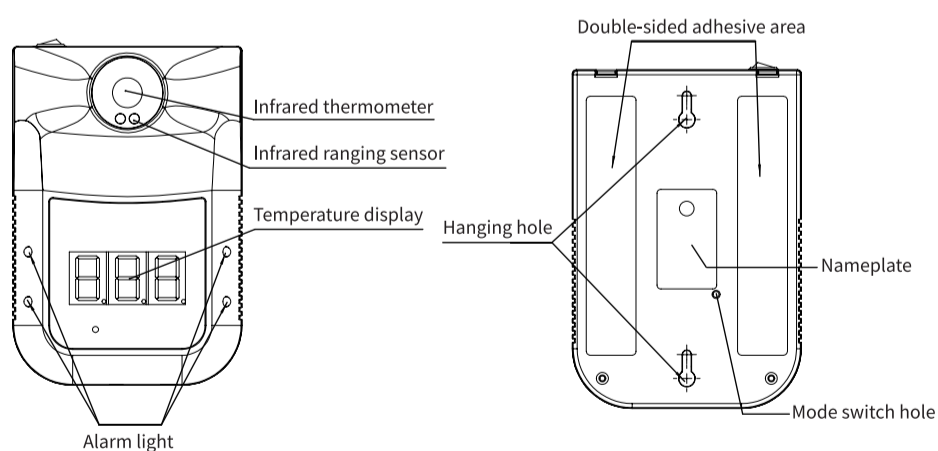

## 2.Specification

1. Accuracy:  $\pm 0.2$  degrees (34~45 C, place it in the operating environment for 30 minutes before use)
2. Abnormal automatic alarm: flashing + "Di Di" sound
3. Automatic measurement: measuring distance 5cm ~ 10cm
4. Screen: Digital display
5. Charging method: USB charging or battery(18650 Li-ion).
6. Install method: nail hook, double-sided adhesive sticking, bracket fixing
7. Environment temperature: 10 C~40 C (Recommended 15 C~35 C)
8. Infrared measuring range: 0~50 C
9. Response time: 0.5s
10. Input: DC 5V
11. Weight: 350g
12. Dimensions: 170\*115\*140mm
13. Standby: About one week
14. Counting capacity: 999

## 3.Status Description

1. Standby: The red dot in the bottom of the display lights up in turn. (Fig. 1)
2. Insufficient power: The horizontal bar lights up in the middle of the display. (Fig. 2)
3. Normal temperature: Flashing green lights and alarm 'Di'. (Fig. 3)



Fig. 1



Fig. 2



Fig. 3

4. Abnormal temperature: Flashing red lights and alarm 'Di Di'.(Fig. 4)




Fig. 4




Fig. 5



Fig. 6

5. Default (bod:object mode) :  
'Lo': Ultra-low temperature alarm. (Fig.5)  
'Hi': Ultra-high temperature alarm.(Fig. 6)

## 4.Operation Instruction

1. Temperature measurement: Front of the thermometer and approach it within 5-10 cm. (Fig. 7)





Fig. 7

2. Mode switching: There is a small hole on the back of the device (Fig. 8). You can use a 3mm diameter screwdriver to insert the hole and then press the button.

- (1) Temperature unit: Press 'mode switch hole' then select 'C' or 'F' (Fig.9, 10) C: Celsius F: Fahrenheit



Fig. 8



Fig. 9



Fig. 10