



Professional Use Silicone Sealant

You are welcomed to come to our factory to buy the latest selling, low price, and high-quality GNS[®] Professional Use Silicone Sealant. We look forward to cooperating with you. PROFESSIONAL USE SILICONE SEALANT is a high quality acetic silicone sealant, professional for construction and general maintenance like kitchens and bathrooms, aluminum and glass, European quality, can meet all standards. For more than 18 years, product has sold to more than 78 countries covering most of Europe, Asia, Middle East, Australia and American market. We are expecting become your long term partner in China.

High quality GNS[®] Professional Use Silicone Sealant is offered by China manufacturer called GNS. Buy Professional Use Silicone Sealant which is of high quality directly with low price from us. Sincerely look forward to cooperating with you in the near future.

1.PRODUCT FEATURE OF GNS[®] PROFESSIONAL USE SILICONE SEALANT G44

- Easy to use – one part silicone sealant, no mixing required. Can be dispensed with an ordinary caulking gun.
- Cures to a strong, flexible seal capable of withstanding movement in and around the joint..
- Outstanding weatherproofing ability, resisting to ultraviolet ray, ozone, snow, or temperature extremes.
- Non-slumping; can be used in vertical and overhead joints.



GUNUO TIANJIN INDUSTRIAL CO., LTD.
WE HAVE BEEN WORKING HARD!

www.gnspufoamsealant.com

PROFESSIONAL USE

EASY TO USE AND REDUCE WASTE



Tel: +86-20-84267539

Email: enquiry@gnsealant.com



GUNUO TIANJIN INDUSTRIAL CO., LTD.
WE HAVE BEEN WORKING HARD!

www.gnspufoamsealant.com




SILICONE SEALANT QUALITY

- Good Adhesion
- No Bubbles
- Multiple Colors

BETTER APPLICATION FACTOR

- Good Elasticity
- Not East To Break
- Good Recovery

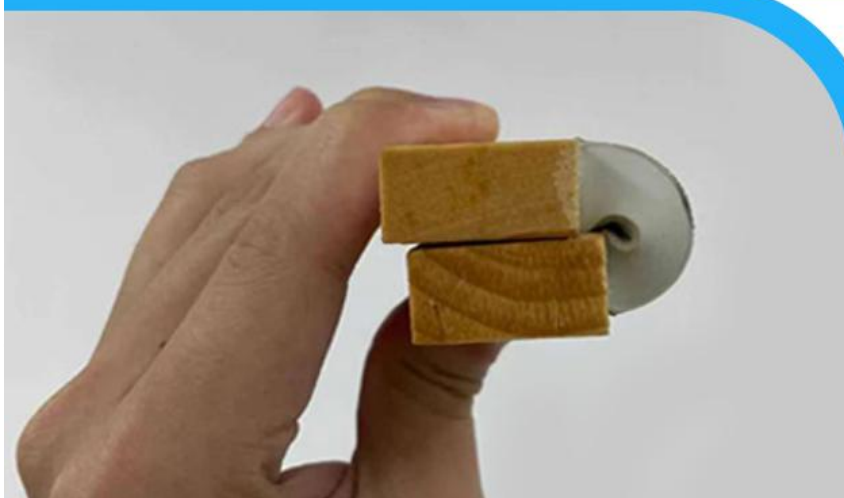

TVS & BUTT JOINT SILICONE

- Cures to a strong, flexible seal capable of withstanding movement

2.PRODUCT PARAMETER (SPECIFICATION) OF GNS® PROFESSIONAL USE SILICONE SEALANT G44

Test Parameter	Unit	Result
As Supplied Tested at 23℃ and 50% RH		
Specific Gravity	g/ml	0.97±0.02
Flow (sag or slump)	mm	0
Extrusion Rate	ml/minute	130
Skin Time	minute	5~10
Tack-free Time	hour	≤1.0
Curing time (5mm)	hour	≤8
As Cured-after 21 days at 23℃ and 50% RH		
Durometer Hardness, Shore A	Points	30
Movement Capability	%	±25
Tensile/Modulus at 50% Elongation	Mpa	0.32
Tensile/Modulus at 100% Elongation	Mpa	0.38
Ultimate Tensile Strength	Mpa	0.45
Ultimate Elongation at Break	%	300

3.APPLICATION OF PROFESSIONAL USE SILICONE SEALANT G44



GUNUO TIANJIN INDUSTRIAL CO., LTD.

WE HAVE BEEN WORKING HARD!

www.gnspufoamsealant.com

PRODUCT APPLICATION RANGE





GUNUO TIANJIN INDUSTRIAL CO., LTD.
WE HAVE BEEN WORKING HARD!

www.gnspufoamsealant.com

HOW TO USE?



1.Loading the Glue Gun



2.Cut the Bottle Top



3.Install the Nozzle Into
the Bottle Top



4.Cut Nozzle To Desired
Based Size



5.Remove Dirt, Grease,
Moisture and Old Caulk



6.Mask Both Sides of Joint
With Masking Tape



7.Evenly Gluing



8.Scrape off Any Excess Glue



9.Remove Masking Tape
Immediately

4.STORAGE AND SHELF LIFE OF PROFESSIONAL USE SILICONE SEALANT G44

12 months from manufacture date when store in cool dry locations below 25℃, keep away from heat source and direct sunlight during storage.

5.PACKING, SHIPPING AND SERVING OF PROFESSIONAL USE SILICONE SEALANT G44

Packing: 220ml to 300ml of cartridge, 590ml 600ml of sausage, 190L of drum. 24 ctgs/ctn of cartridge, 20 pcs/ctn of sausage. (For special specifications, please contact us.)

Shipping: Sea, air or land transportation

Serving: We provide free design service, and you'll get excellent after-sales service, we committed to solving any problems that may occur when you use our products.



GUNUO TIANJIN INDUSTRIAL CO., LTD.

WE HAVE BEEN WORKING HARD!

www.gnspufoamsealant.com

OUR FACTORY



Tel: +86-20-84267539

Email: enquiry@gnsealant.com



GUNUO TIANJIN INDUSTRIAL CO., LTD.
WE HAVE BEEN WORKING HARD!

www.gnspufoamsealant.com



COMPANY PROFILE

- The biggest PU foam manufacturer in Asia
- 17 years export experience
- Sold to 72 countries and areas
- Equipped with 32 advanced full-automatic production line
- 50% market share in China
- Accredited to all kinds certificates

Tel:+86-20-84267539

Email:enquiry@gnsealant.com



GUNUO TIANJIN INDUSTRIAL CO., LTD.

WE HAVE BEEN WORKING HARD!

www.gnspufoamsealant.com

OUR ADVANTAGES



QUALITY

Provide stable and good quality assurance



PACKING

750ml 500ml 300ml, 12 cans/carton.
(For special specifications, please contact us.)



TRANSPORT

Sea or land transportation



TECHNOLOGY

Establish a joint laboratory with
WANHUA & DuPont to create
products that meet
customer needs



COOPERATION

Customer-centric, looking
forward to cooperating
with all potential customers



SERVICE

We provide free design service,
and you'll get excellent after
-sales service

6.FAQ

Q: What's the reason that after the silicone sealant cured, it will be crack out of the base material?

Tel: +86-20-84267539

Email: enquiry@gnsealant.com

A: The base material is not match for silicone sealant or there are some duct on the base material surface when use the silicone sealant. In order to avoid this happen. Before use the silicone sealant, please kindly clean the base material surface and recommend to do the compatibility test.

Q: What's the difference between Neutral silicone sealant and Acetic silicone sealant?

A.Neutral silicone sealant can be used both indoor or outdoor, but acetic silicone sealant just can be used indoor.

