



**GUNUO TIANJIN INDUSTRIAL CO., LTD.**  
WE HAVE BEEN WORKING HARD!

[www.gnspufoamsealant.com](http://www.gnspufoamsealant.com)



## Spray Paint

As the professional manufacture, we would like to provide you GNS® Spray Paint. And we will offer you the best after-sale service and timely delivery.



GNS Spray Paint presents a wide spectrum of brilliant colours for paint jobs with a professional finish. The advanced formulation provides outstanding resistance to peeling, cracking, chipping and colour fading caused by all weather conditions. Available in a broad range of the best-selling colours, mainly matching to RAL.

GNS is China manufacturer & supplier who mainly produces GNS® Spray Paint with many years of experience. Hope to build business relationship with you.

### 1.PRODUCT FEATURE OF GNS® SPRAY PAINT

- Very good coverage
- Excellent adhesion on many surfaces
- Good flow, smooth surface
- Quick-drying
- Suitable for indoors and outdoors applications
- Polishable surface
- Weather-resistant, light-proof, UV-resistant
- Scratch-, shock- and impact-resistant
- Quick-drying (The drying time depends on surrounding temperature, air humidity and thickness of the applied coat).

### 2.TYPICAL PROPERTIES OF GNS® SPRAY PAINT

Base	Acrylic
Consistency	Smooth Surface
Inner Pressure under 25°C (mpa)	0.56
Tack-Free Time (min)	≤ 15
Drying Time(hours)	≤ 8



Adhesion	Class 1	
Glossy(60°)	≥80	
Component content	Pb (mg/kg)	1000
	Cd (mg/kg)	100
	Hg (mg/kg)	1000
	Cr6+ (mg/kg)	1000
	Benzene (%)	≤ 0.3
Water resistance	24 Hours no bubble, No Fall off	


Specification Writers: Please contact your local Authorized Distributor or our Technical Services Department before writing Specifications on this product. These values are not intended for use in preparing specifications.

### 3.APPLICATIONS AREAS OF SPRAY PAINT

- Suitable for wood, metal, paper, glass or paintable hard plastics as well as for many textiles for any variety of designing applications.
- Also applicable for the designing of finery, concrete and natural stone.

### 4.APPLICATION INSTRUCTIONS OF SPRAY PAINT

- The surface has to be clean, dry and free from fat.
- Remove residues of old paintings and rust, then sand and prime if necessary.
- Let dry for 1 - 2 hours.
- Use Plastic Primer on plastic parts.
- Cover areas not to be painted.
- Before use, shake the can for 3 minutes.
- Test spray at an invisible spot to check colour-matching and compatibility of the lacquer.
- Spray from a distance of approx. 25 cm several thin coats.
- Do not spray over synthetic paints.

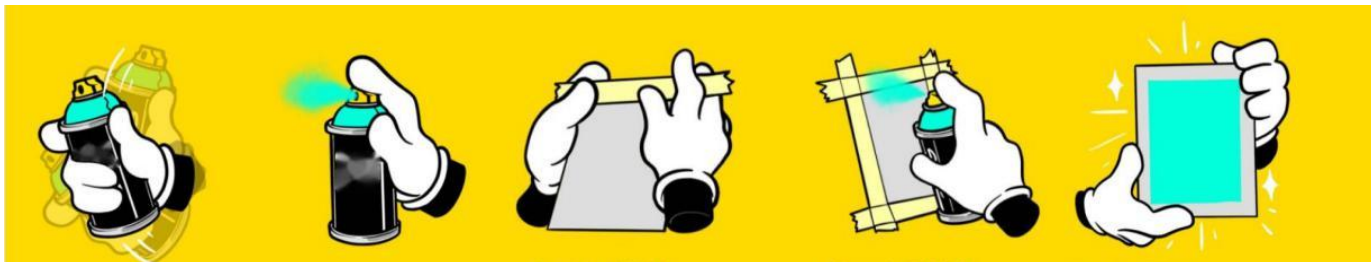

## 5.STORAGE AND SHELF LIFE OF SPRAY PAINT

36 months from manufacture date when store in cool dry locations below 27°C, keep away from heat source and direct sunlight during storage.

## 6.PRODUCT QUALIFICATION



## 7.PACKING, SHIPPING AND SERVING OF SPRAY PAINT

Packing : 238gram Net Weight, 400ml aerosol cans, 12ctgs/ctn

Shipping: Sea, air or land transportation

Serving: We provide free design service, and you'll get excellent after-sales service, we committed to solving any problems that may occur when you use our products.

## 8.FAQ

Q: Can I get a sample before order?

A: Sample is available and free, please contact us or send your requirements by email.

Q: How can you guarantee the quality?

A: We have rigorous quality test system, from raw materials to finished products, the materials must be checked and confirmed by QC department.