



GUNUO TIANJIN INDUSTRIAL CO., LTD.
WE HAVE BEEN WORKING HARD!

www.gnspufoamsealant.com



Super Nails Adhesive

You can rest assured to buy customized GNS® Super Nails Adhesive from us. We look forward to cooperating with you, if you want to know more, you can consult us now, we will reply to you in time!

SUPER NAILS ADHESIVE 711 is a premium grade multipurpose construction adhesive that delivers a consistently stronger and lasting bond on most construction substrate. This adhesive is a very versatile product which exhibits excellent water resistance, flexibility, good temperature and good slump resistance.

As a professional high quality GNS® Super Nails Adhesive manufacture, you can rest assured to buy Super Nails Adhesive from our factory and we will offer you the best after-sale service and timely delivery. We wish to be a long-term partner with you.

1.PRODUCT FEATURE OF GNS® SUPER NAILS ADHESIVE 711

- One Part, easy to use, multipurpose;
- Paintable;
- Good adhesion for most common building materials wood, particle board, building board, masonry, aluminum, galvanized iron, steel, concrete, marble and granite (not be used for plastics or related substrate);
- Very good water and weathering resistance, durability and adhesive properties;
- Being suitable for interior & exterior general construction work.

2.TYPICAL PROPERTIES OF GNS® SUPER NAILS ADHESIVE 711

Test Parameter	Unit	Result
As Supplied Tested at 23°C and 50% RH		
Specific Gravity	g/ml	1.4±0.1
Flow (sag or slump)	mm	0.5
Extrusion Rate	ml/minute	280
Skin Time	minute	5



GUNUO TIANJIN INDUSTRIAL CO., LTD.

WE HAVE BEEN WORKING HARD!

www.gnspufoamsealant.com

non-volatile matter content	%	73.6
Appearance		Exquisite and uniform, no obvious particles
Durometer Hardness, Shore A	Points	85
Shear Strength (0.5h)	Mpa	1.6
Shear Strength (72h)	Mpa	38
Heat resistance (100°C 30min)		Bring to room temperature, no bubble, no cracks

3.APPLICATIONS AREAS OF GNS® SUPER NAILS ADHESIVE 711

- *Sheet flooring to joists
- *Metal or aluminium door strips to floors or walls
- *Timber or fibre cement sheeting to cement block or brick walls
- *Masonite /hardboard to timber or floor boards
- *Wallboard or panelling to wood or metal frames
- *Cork tiles to timber, fibre cement or plaster



GUNUO TIANJIN INDUSTRIAL CO., LTD.
WE HAVE BEEN WORKING HARD!

www.gnspufoamsealant.com

APPLICATION AREA



Drawing Decoration



Skirting Line



Broom Hook



Hook



Wood Floor



Shelf



Hair Dryer Shelf



Tissue Shelf



Kitchen Shelf



Mirror




Gypsum Board Decoration



Spatula Hook

4. APPLICATION INSTRUCTIONS OF SUPER NAILS ADHESIVE 711

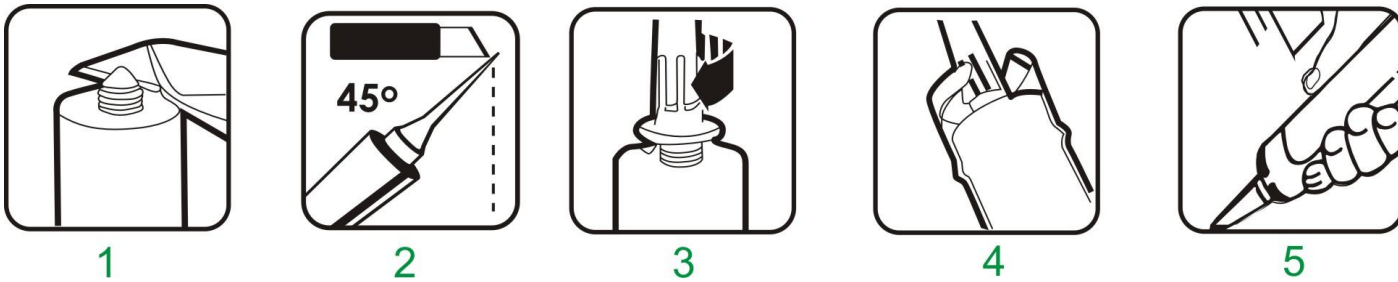

--Thoroughly clean and dry surface from oil, dirt and grease. Allow to dry completely before applying silicone.

--Cut the seal at the top of the cartridge and cut the nozzle at a 45° angle, to the size of the gap opening. Screw the nozzle to the top of the cartridge.

--Place the cartridge into a caulking gun.

--Hold the caulking gun at a 45° angle. Press the nozzle opening against the joint, apply steady pressure to the caulking gun and extrude the silicone sealant forcing the sealant into the gap and move in a pushing motion, along the joint in one smooth action.

--Sealant will cure fully in 48 hours. As this point any unwanted sealant can be removed by trimming with a sharp blade, but avoid under cutting the seal.

5. STORAGE AND SHELF LIFE OF SUPER NAILS ADHESIVE 711


12 months from manufacturing date when store in cool dry locations below 25°C. Keep away from heat source and direct sunlight during storage.

6. PACKING, SHIPPING AND SERVING OF SUPER NAILS ADHESIVE 711

Packing : 300ml cartridge, 24ctgs/ctn

Shipping: Sea or land transportation

Serving: We provide free design service, and you'll get excellent after-sales service, we committed to solving any problems that may occur when you use our products.

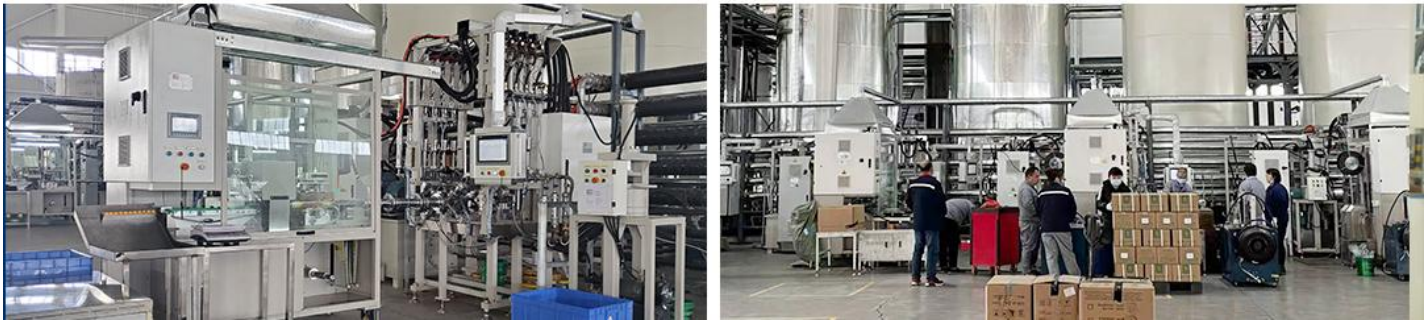

7.FAQ

Q: How long can I get a quote?

The quotation can be provided not longer than 24 hours on condition that we know all detailed requirements.

Q: How to find the suitable sealants?

A: Please let me know your application purpose, substrate, application method and all your requirements.

