



FLD-B

Technical Specifications


POWER	10W	20W	30W	50W	100W
SIZE	9.5*6.5*2.3cm	11.5*8.5*2.3cm	14.5*10.5*2.3cm	19*14*2.3cm	24*18*2.3cm
CCT	3000K/4000K/6500K	3000K/4000K/6500K	3000K/4000K/6500K	3000K/4000K/6500K	3000K/4000K/6500K
LUMINOUS FLIX	80/90lm/w	80/90lm/w	80/90lm/w	80/90lm/w	80/90lm/w
CRI	70/80	70/80	70/80	70/80	70/80
PF	>0.9	>0.9	>0.9	>0.9	>0.9
IP	65	65	65	65	65
RESISTING SURGE	2KV	2KV	2KV	2KV	2KV
VOLTAGE	110-260V	110-260V	110-260V	110-260V	110-260V
LAMP BEADS	SMD2835	SMD2835	SMD2835	SMD2835	SMD2835
LIGHT EMITTING ANGLE	120°	120°	120°	120°	120°

Sensor



Bracket



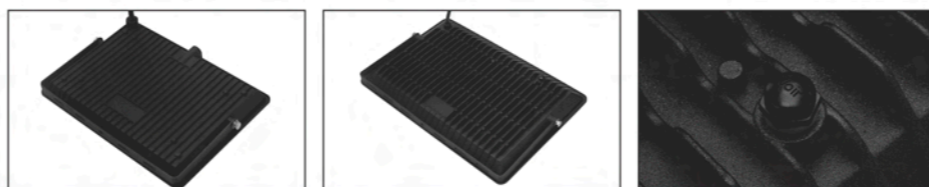

FLD-A

Technical Specifications

POWER	10W	20W	30W	50W	70W	100W	150W	200W	250W	300W
SIZE	9*6.5*1.8cm	11.5*8.2*1.9cm	15.8*10.8*1.9cm	22*16*2cm	22*16*2cm	256*165*23cm	342*229*30cm	378*270*32cm	378*270*32cm	450*320*35cm
CCT	3000K/4000K/6500K	3000K/4000K/6500K	3000K/4000K/6500K	3000K/4000K/6500K	3000K/4000K/6500K	3000K/4000K/6500K	3000K/4000K/6500K	3000K/4000K/6500K	3000K/4000K/6500K	3000K/4000K/6500K
LUMINOUS FLIX	80/90LM/W	80/90LM/W	80/90LM/W	80/90LM/W	80/90LM/W	80/90LM/W	80/90LM/W	80/90LM/W	80/90LM/W	80/90LM/W
CRI	70/80	70/80	70/80	70/80	70/80	70/80	70/80	70/80	70/80	70/80
PF	>0.9	>0.9	>0.9	>0.9	>0.9	>0.9	>0.9	>0.9	>0.9	>0.9
IP	65	65	65	65	65	65	65	65	65	65
RESISTING SURGE	2KV	2KV	2KV	2KV	2KV	3KV	3KV	3KV	3KV	3KV
VOLTAGE	110-260V	110-260V	110-260V	110-260V	110-260V	110-260V	110-260V	110-260V	110-260V	110-260V
LAMP BEADS	SMD2835	SMD2835	SMD2835	SMD2835	SMD2835	SMD2835	SMD2835	SMD2835	SMD2835	SMD2835
LIGHT EMITTING ANGLE	120°	120°	120°	120°	120°	120°	120°	120°	120°	120°

FLD-A-a

Technical Specifications



POWER	10W	20W	30W	50W
SIZE	9*11*1.8cm	11.5*12.5*1.9cm	15.8*15.4*1.9cm	22*20.6*2cm
CCT	3000K/4000K/6500K	3000K/4000K/6500K	3000K/4000K/6500K	3000K/4000K/6500K
LUMINOUS FLIX	80/90lm/w	80/90lm/w	80/90lm/w	80/90lm/w
CRI	70/80	70/80	70/80	70/80
PF	>0.9	>0.9	>0.9	>0.9
IP	54	54	54	54
RESISTING SURGE	2KV	2KV	2KV	2KV
VOLTAGE	110-260V	110-260V	110-260V	110-260V
LAMP BEADS	SMD2835	SMD2835	SMD2835	SMD2835
LIGHT EMITTING ANGLE	120°	120°	120°	120°
DETECTION ANGLE	120°	120°	120°	120°
MOVEMENT SPEED	0.6-1.5M/SEC	0.6-1.5M/SEC	0.6-1.5M/SEC	0.6-1.5M/SEC