


ST-S1390S

机头升降旋转智能模板机

Machine Head Lifting Rotating Intelligent Template Machine



- 采用电机水平旋转剪线方式，厚料剪线更稳定。
The thread trimming use motor horizontal rotation, heavy material trimming much more stable.
旋梭设计为立梭结构，针对厚料产品线迹美观，稳定性更强。
Rotary hook is vertical design, it is special for heavy material. The stitch is much perfect and stable.
旋梭选用3倍旋梭，缝制长度增大。
Use 3 times Rotary Hook, stitch length increase.
- 机头可升降，提升高度最大50MM，增强产品的适应性。
Machine head can lift, the max height is 50mm.
- 应用领域：汽车座垫、箱包皮具、家具沙发等各类厚料产品。
Use for car seats, bags, sofas and other kinds of heavy material products.

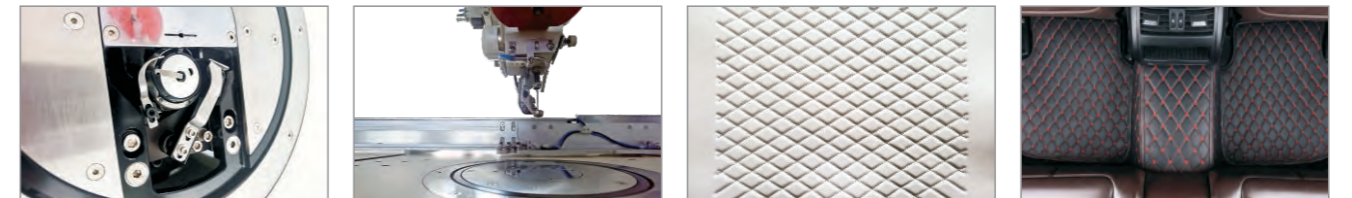

规格参数 Specifications

型号 Model	ST-S1390S
名称 Name	机头升降旋转智能模板机 Machine Head Lifting Rotating Intelligent Template Machine
缝制范围 Sewing Area	1300mmx900mm
360°旋转头 360°Rotating	伺服马达600W Servo Motor 600W
线迹 Stitch	智能模板机(3倍旋梭) Intelligent template machine(3 times Rotary Hook)
	单针平缝 Single needle lock stitch
最高缝纫速度 Max. Sewing Speed	2500针/分钟 2500sti/min
机头上升高度 Head Lift Height	50mm
送布装置 Feed System	X轴丝杆伺服马达600W X screw servo motor 600W
	Y轴丝杆伺服马达750W Y screw servo motor 750W
针距 Stitch Length	0.05-50mm
最大针数 Max Stitches	20000针/图案 20000stitches / program
间歇压脚上升量 Presser Foot Lift	22mm
间歇压脚行程 Presser Foot Stroke	0或2-10mm(出厂设置5mm) 0 or 2-10mm(factory setting 5mm)
旋梭 Rotary Hook	旋梭(标准旋梭是选购件) Rotary Hook (standard rotary hook is option)
切线装置 Thread Trimming Device	电机水平旋转 Motor horizontal rotation
数据存储方式 Data Storage Media	USB
主轴马达 Main Motor	AC伺服马达750W AC Servo Motor 750W
气压 Pressure	0.4-0.6 Mpa 1.7 L/min