


Lamps color can be customized according to user requirements




Size Diagram

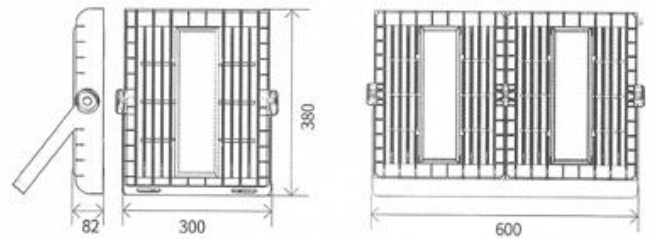

Features:

- ☆ Reinforced die-cast aluminum lamp body and hood, smooth surface self-cleaning function, perfect appearance and reinforced structure design.
- ☆ Efficient heat dissipation design, electrostatic spraying, strong corrosion resistance and durability.
- ☆ Plug-in waterproof design, waterproof and more effective and durable, up to IP66.
- ☆ 3.5°. Optical narrow light design with a range of up to 80 meters and a central illumination of 50 lux.
- ☆ Power and signal end anti-surge protection and power supply high voltage and wide voltage input design, up to 305V, can adapt to a variety of demanding power supply environment.

产品配光选型 Light distribution curve

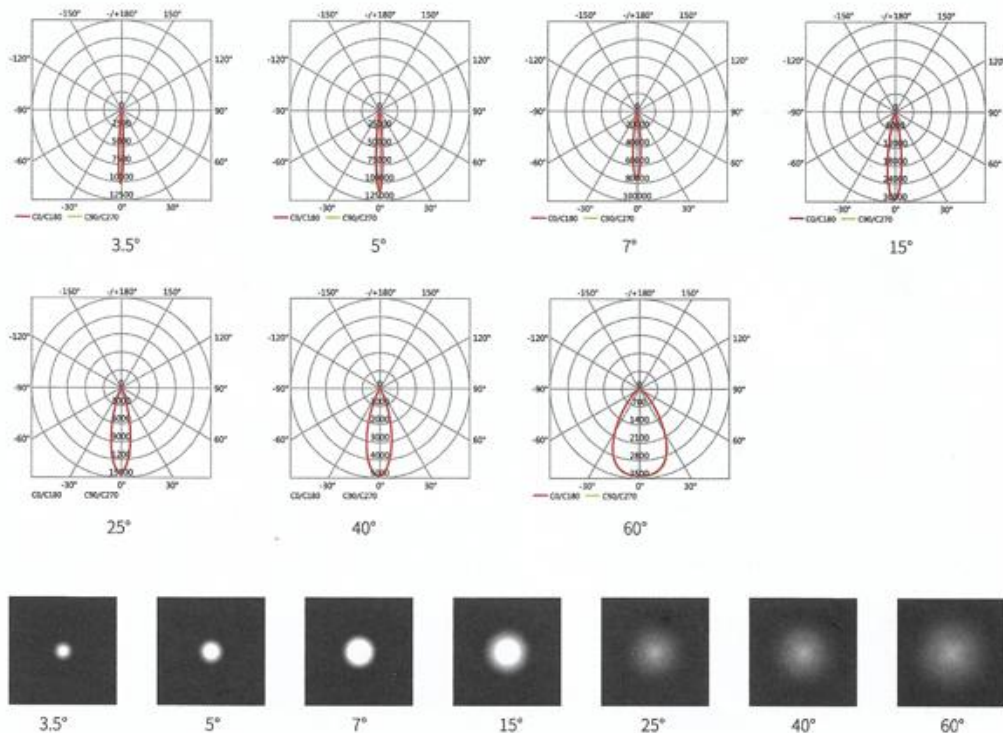

Yangzhou Langxu Lighting Technology Co., Ltd.

Address: Guoji Industrial Park, Songqiao Town, Yangzhou City, Jiangsu Province, China Tel: +86-18944481288 E-mail: yzlx888@263.net



Product Specification

Rated Power	120W	160W	200W	240W	320W	400W	480W
Input Voltage	AC85~260V						
Colour Temperature	3000K 4000K 5000K 6000K						
LED junction temperature	<100°C						
LED luminous efficienc	>120 lm/W						
Luminous Flux	14400lm	19200lm	24000lm	28800lm	38400lm	48000lm	57600lm
Temperature of Working Condition	-35-50°C						
Humidity of Working Condition	10%-90%						
LED Lifetime	>70000H						
Protection Grade	IP66						

Yangzhou Langxu Lighting Technology Co., Ltd.

Address:Guoji Industrial Park, Songqiao Town, Yangzhou City, Jiangsu
Province, China Tel:+86-18944481288 E-mail:yzlx888@263.net