


防水接线器 IP68 waterproof connector

M684-X Quick connector



参考剥线长度/Refer to stripping length

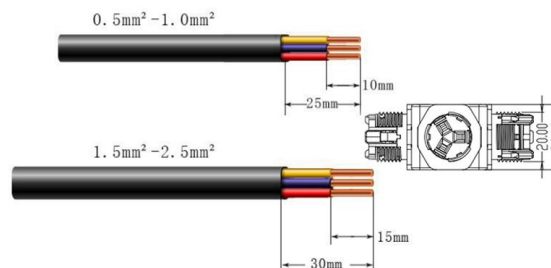

产品参数/Technical data	
型号 Model	M684-X
材料/Material	UL94V-2 Fire and flame retardant
额定输出 Rated power	IEC/NSW:24A 450VAC ETL:10A 300VAC
防护等级 IP code	IP68
接线端子 Terminal	2P/3P
工作温度 Working	T105
接线范围 Rated connecting capacity	欧规 European:0.5 ~ 2.5mm ² 澳规 Australia:0.5 ~ 2.5mm ² 美规 American:SJOW 14-18AWG
适用线径/Available cable diameter (橡胶圆线/Rubber round cable)	4*M20(4-8mm/ 6-11mm) 2 款供选择/2 type for choosing
防水测试 Testing	20M 150hours
参考剥线长度 Refer to stripping length	10mm (0.5~1.0mm ²) 15mm (1.5~2.5mm ²)
产品尺寸 Product Size(参考实际尺寸图)	128.32mm*128.32mm*26.4mm (Refer to actual drawing)
认证 Certification	ENEC,CE,CB,UKCA,ETL,NSW,ROHS
包装 Package	10PCS/PE bag 100PCS/Carton, 纸箱尺寸/Carton size:38*31*30CM 毛重/G.W. :16kg/Carton

外型尺寸 Dimensions

