


4E $\Phi 4.6 \times 15$ RoHS Compliant



玻璃保险丝管(延时型)

Glass Tube Fuse (Time-Lag) 250V/125V

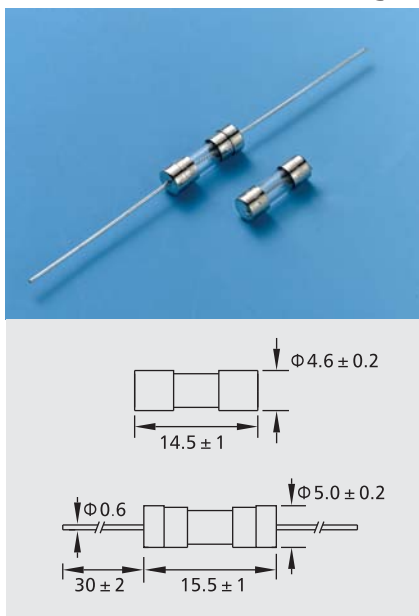

测试标准:

Testing Standard:
UL248-1 UL248-14

额定分断能力:

Interrupting Rating:
10000 Amperes at 125V AC
35 Amperes at 250V AC(100mA~1A)
100 Amperes at 250V AC(1.25A~6.3A)

工作温度:

Operating Temperature:
-55°C ~ +125°C

材料:


Materials:
End cap:nickel plated brass
Glass tube:glass
Lead wire:tinned copper wire
Inner cap:nickel plated brass

焊接方法:

Soldering Method:
Wave soldering: 260°C, 10s max
Manual soldering: 350°C, 5s max

Time-Current Characteristics

电流-时间曲线图

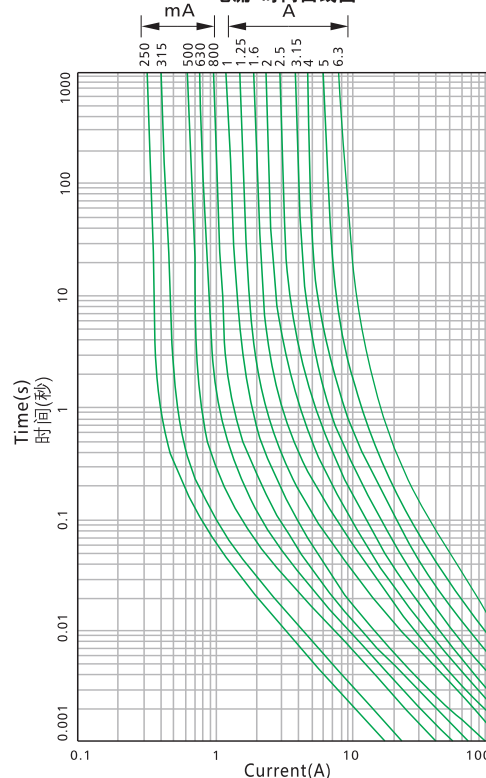

电气特性: Electrical Characteristics

额定电流的% % of Ampere Rating	熔断时间 Opening Time
100%	4 hours Min(大于4小时)
135%	1 hour Max(小于1小时)
200%	120 s Max(小于120秒)
1000%	10 ms Min(大于10毫秒)

目录编号: Catalog No.A:250V B:125V 带引线产品目录编号后加"P":Suffix"P"for Lead Type After Catalog No.

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	熔化热积分 ² Melting Integral (A ² .S)	认证 Approvals		
				UL	cUL	UL US
4E0125A/B	125mA	250V/125V	0.008	●	●	
4E0160A/B	160mA	250V/125V	0.015	●	●	
4E0200A/B	200mA	250V/125V	0.025	●	●	
4E0250A/B	250mA	250V/125V	0.040	●	●	
4E0315A/B	315mA	250V/125V	0.075	●	●	
4E0350A/B	350mA	250V/125V	0.09	●	●	
4E0500A/B	500mA	250V/125V	0.28	●	●	
4E0630A/B	630mA	250V/125V	0.42	●	●	
4E0750A/B	750mA	250V/125V	0.70	●	●	
4E0800A/B	800mA	250V/125V	0.80	●	●	
4E1100A/B	1A	250V/125V	1.0	●	●	
4E1125A/B	1.25A	250V/125V	2.5	●	●	
4E1150A/B	1.5A	250V/125V	2.8	●	●	
4E1160A/B	1.6A	250V/125V	3.5	●	●	
4E1200A/B	2A	250V/125V	12.8	●	●	
4E1250A/B	2.5A	250V/125V	18	●	●	
4E1300A/B	3A	250V/125V	19	●	●	
4E1315A/B	3.15A	250V/125V	21	●	●	
4E1350A/B	3.5A	250V/125V	34	●	●	
4E1400A/B	4A	250V/125V	52	●	●	●
4E1500A/B	5A	250V/125V	80	●	●	●
4E1630A/B	6.3A	250V/125V	115	●	●	●

● 表示已获认证
● 表示认证中