



Customizable part turn electric motor operated valve actuator



Customizable part turn electric motor operated valve actuator is specially designed for quarter turn operating applications such as ball, butterfly, plug valves and similar usages. Because our customizable part turn electric motor operated valve actuator are sold all over the world, we are famous for quality, stable operation and safe operation. AOX is an electric

actuator **manufacturer** from China. Our products, as always, continue this trend and will never change.



Zhejiang Aoxiang Auto-Control Technology CO.,Ltd

Tel: [+86-577-59890750](tel:+86-577-59890750)

Phone: [+86-18967766527](tel:+86-18967766527)

Fax: [+86-0577-65921296](tel:+86-0577-65921296)

E-mail: zjax@zjax.com



Customizable part turn electric motor operated valve actuator

Introduction

Customizable part turn electric motor operated valve actuator is specially designed for quarter turn operating applications such as ball, butterfly, plug valves and similar usages. AOX's innovative product design concepts and products in practical applications have received much attention and recognition. AOX has its own **factory**. Customizable part turn electric motor operated valve actuator are reliable, safe and convenient, with the advantages of compatibility and practicability. Zhejiang Aoxiang Auto-Control Technology CO.,Ltd


Tel: [+86-577-59890750](tel:+86-577-59890750)

Phone: [+86-18967766527](tel:+86-18967766527)

Fax: [+86-0577-65921296](tel:+86-0577-65921296)

E-mail: zjaox@zjaox.com

Structural Features

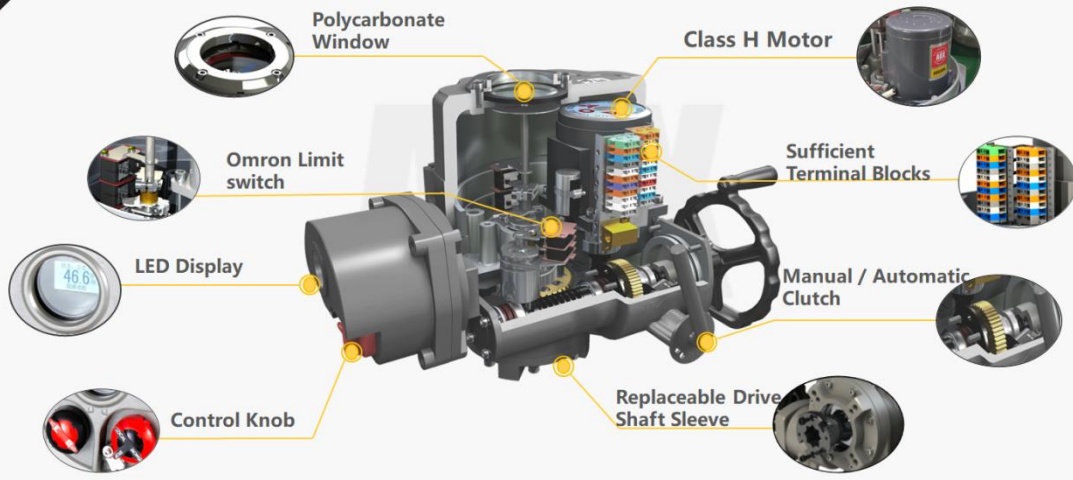

Product Images





Product Images



Electric teflon butterfly valve



Electric hard seal butterfly valve



Electric soft seal butterfly valve



Electric fluorine lined butterfly valve

Customizable part turn electric motor operated valve actuator

Parameter (Specification)

Zhejiang Aoxiang Auto-Control Technology CO.,Ltd

Tel: [+86-577-59890750](tel:+86-577-59890750)

Phone: [+86-18967766527](tel:+86-18967766527)

Fax: [+86-0577-65921296](tel:+86-0577-65921296)

E-mail: zjaox@zjaox.com



Model	Max Output Torque	60/50Hz Operating Time	Max Drive Shaft Size	Power	Rated Current (A)				Hand wheel Revolution	Weight
					single phase		three phases			
					110V	220V	380V	440V		
AOX-Q-005	50	18/22	Φ20	20	1.10/0.95	0.55/0.54	0.3/0.3	N/A	10	7.5
AOX-Q-008	80	18/22	Φ20	20	1.10/0.95	0.55/0.54	0.3/0.3	N/A	10	7.5
AOX-Q-010	100	18/22	Φ20	20	1.10/0.95	0.55/0.54	0.3/0.3	N/A	10	7.5
AOX-Q-015	150	21/25	Φ20	40	1.65/1.67	0.88/0.84	0.31/0.31	0.30/0.31	11	17.3
AOX-Q-020	200	21/25	Φ20	40	1.67/1.67	0.89/0.85	0.31/0.31	0.30/0.31	11	17.3
AOX-Q-030	300	26/31	Φ32	90	1.85/1.86	0.92/0.92	0.35/0.35	0.34/0.34	13.5	22
AOX-Q-050	500	26/31	Φ32	120	3.60/3.62	1.55/1.58	0.59/0.59	0.58/0.58	13.5	23
AOX-Q-060	600	26/31	Φ32	120	3.65/3.62	1.60/2.20	0.60/0.59	0.59/0.58	13.5	23
AOX-Q-080	800	31/37	Φ40	180	4.10/4.10	2.15/2.20	0.85/0.85	0.79/0.79	16.5	29
AOX-Q-120	1200	31/37	Φ40	180	4.20/4.10	2.35/2.30	0.87/0.87	0.81/0.81	16.5	29
AOX-Q-150	1500	78/93	Φ40	120	3.65/3.62	1.60/2.20	0.60/0.59	0.59/0.58	40.5	77
AOX-Q-200	2000	93/112	Φ40	180	4.10/4.10	2.15/2.20	0.85/0.85	0.79/0.79	49.5	83
AOX-Q-300	3000	93/112	Φ40	180	4.20/4.10	2.35/2.30	0.87/0.87	0.81/0.81	49.5	83
AOX-Q-400	4000	155/185	Φ40	180	4.20/4.10	2.35/2.30	0.87/0.87	0.81/0.81	82.5	83
AOX-Q-500	5000	155/185	Φ40	180	4.20/4.10	2.35/2.30	0.87/0.87	0.81/0.81	82.5	83
AOX-Q-600	6000	155/185	Φ40	180	4.20/4.10	2.35/2.30	0.87/0.87	0.81/0.81	82.5	83

Customizable part turn electric motor operated valve actuator

Feature And Application

Torque range: 50~6000N.m

Switching time: 22~185 S

Weight: 7.5 KGS~83 KGS

Protection: IP67, (IP68 optional) Exd II CT5

Manual Override: Yes

Output signal(On-off type): Fully open & fully close passive contact(2A 250VAC).

Input/output signal (modulating type): 4-20mA(std configuration); 0-10V & 2-10V is optional.

Zhejiang Aoxiang Auto-Control Technology CO.,Ltd

Tel: [+86-577-59890750](tel:+86-577-59890750)









Phone: [+86-18967766527](tel:+86-18967766527)

Fax: [+86-0577-65921296](tel:+86-0577-65921296)

E-mail: zjaox@zjaox.com











Comparison With Other Products (Eight Major Improvements)

Other manufacturers	Description	Other manufacturers	Description
	The gasket is easily deformed by temperature and other reasons, resulting in reduced sealing performance, which is not very aesthetically pleasing.		The combination of upper and lower cover adopts concave and convex structure, inner gasket O-ring, strong sealing performance, beautiful appearance, high protection level, more convenient for debugging and wiring, only need to open the upper cover
	The use of chemical adhesives may lead to ageing and water ingress due to high temperatures and pressures on site, and the plastic and glazing are easily damaged.		Convex mirror surface, no water accumulation, and continuous valve opening indication, more convenient observation, external metal, not easy to damage
	Ordinary terminal blocks, in the field of temperature difference or vibration, will cause the fastening screws to loosen, resulting in poor contact phenomenon.		The use of self-actuating pop-up terminals guarantees absolute reliability and is a symbol of high-end products.
	The gearboxes are made of plastic, and individual manufacturers use powder alloys for the gears, which are prone to wear.		The gearbox is made of 40Cr, refined by three heat treatments, more solid and reliable

Patent No.: ZL 2013 3 0145624.9
 ZL 2013 3 0145691.0
 ZL 2013 3 0112341.4
 ZL 2013 3 0112302.4



Comparison With Other Products (Eight Major Improvements)

	Spanner not fixed to the case, easily lost		The spanner is placed on the box, so it is not easily lost on site and is easy to use
	Regulated modules have built-in, electronic components that are affected by the temperature generated during operation.		The adjustment module is mounted externally and the bare board dissipates heat better. From the contribution that the maximum temperature of the actuator is 120°C within the temperature of the electronic elements of the module is only 65°C. The weak control power supply is used and the quality of the module will not be affected by the unstable voltage on site.
	The screws of other manufacturers' housings are not equipped with an anti-dislodgement function, which can easily lead to the dislodgement of the screws during maintenance when removing the housing at height.		The top cover bolts are specially designed not to come off during maintenance and installation. All external bolts are made of stainless steel and will not rust
	Other manufacturers use M3 screws for unrealistic positioning, inaccurate, slippery threads, M3 spanners are not easy to find on site and other drawbacks.		AOX has improved the electrical cam structure by integrating the four cams into two and isolating them with a butterfly shaped bullet, topped with an anti-loosening nut, and using imported Omron travel switches.

Patent No.: ZL 2013 3 0111005.8
 ZL 2013 3 0111120.5
 ZL 2013 3 0111352.0



Customizable part turn electric motor operated valve actuator

Details

1. Various output torque from 50Nm to 6000Nm.
 2. Removable drive bushing for AOX-Q series smart motorized quarter turn actuator
- Zhejiang Aoxiang Auto-Control Technology CO.,Ltd

Tel: +86-577-59890750

Phone: +86-18967766527

Fax: +86-0577-65921296

E-mail: zjaox@zjaox.com



- Easy mounting base standard to ISO5211.
- Bushings can be processed according to different requirements, four hanging ears made a close fit with shaft and sleeve.



3. Indicator of smart motorized quarter turn actuator sustained by spring
- Direction of visual indicator is set by factory.
 - In case of changing its direction, just grip the indicator plate and change the position.
 - Spring beneath indicator plate sustains the set position unchanged.
 - No need to loose screw and tight it again at all.

Zhejiang Aoxiang Auto-Control Technology CO.,Ltd

Tel: [+86-577-59890750](tel:+86-577-59890750)

Phone: [+86-18967766527](tel:+86-18967766527)

Fax: [+86-0577-65921296](tel:+86-0577-65921296)

E-mail: zjax@zjax.com



www.aox-privod.com



Zhejiang Aoxiang Auto-Control Technology CO.,Ltd

Tel: [+86-577-59890750](tel:+86-577-59890750)

Phone: [+86-18967766527](tel:+86-18967766527)

Fax: [+86-0577-65921296](tel:+86-0577-65921296)

E-mail: zjax@zjax.com