



Economy part turn electric actuator



Economy part turn electric actuator is specially designed for quarter turn operating applications such as ball, butterfly, plug valves and similar usages. Economy part turn electric actuator driven by 380V/220V/110VAC or 24V/110VDC power, inputs 4-20mA or 0-10VDC control signal, moves valve to the right position, and achieves to automatic control, the maximum output torque is 5000Nm. AOX is a Chinese electric actuator **manufacturer**. AOX is a

supplier to many large enterprises. We are committed to providing our distributors and customers with the best service.



Zhejiang Aoxiang Auto-Control Technology CO.,Ltd

Tel: [+86-577-59890750](tel:+86-577-59890750)

Phone: [+86-18967766527](tel:+86-18967766527)


Fax: [+86-0577-65921296](tel:+86-0577-65921296)

E-mail: zjaox@zjaox.com



Economy part turn electric actuator Introduction

Economy part turn electric actuator is newly designed and developed for a swing angle ranging between 90° and 270°, such as butterfly valves, ball valves. Since 1997, AOX has made every effort to deliver the highest quality economy part turn electric actuator and services for our customers. Through innovative management, technology development and human resources management, we will strive to lead and promote the development of the industry. We are expecting become your long term partner in **China**.

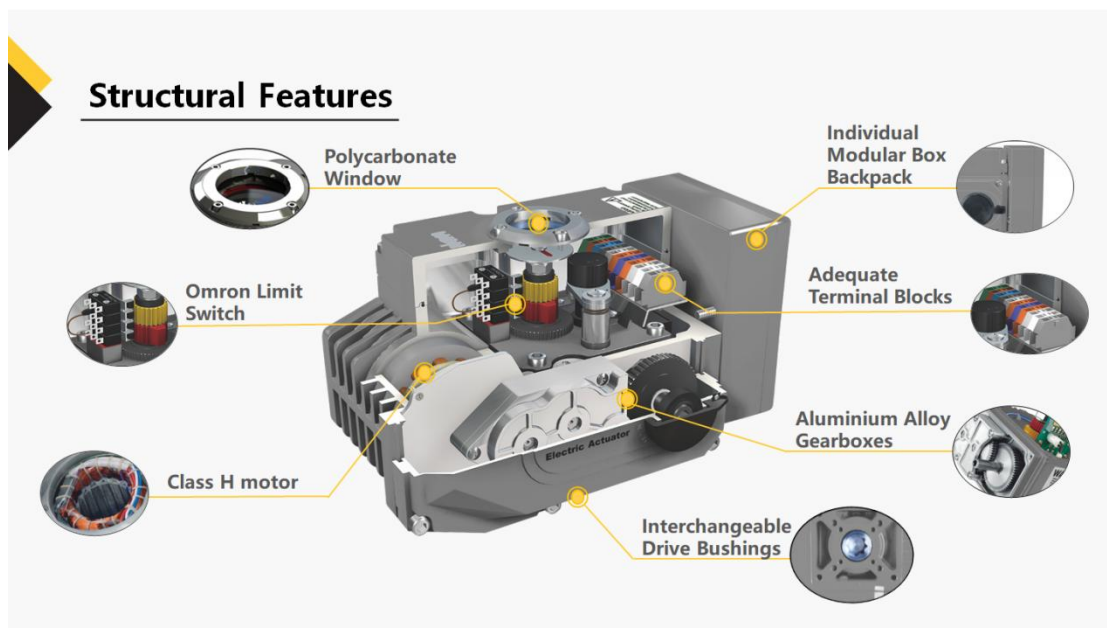



Zhejiang Aoxiang Auto-Control Technology CO.,Ltd

Tel: [+86-577-59890750](tel:+86-577-59890750)

Phone: [+86-18967766527](tel:+86-18967766527)

Fax: [+86-0577-65921296](tel:+86-0577-65921296)

E-mail: zjaox@zjaox.com

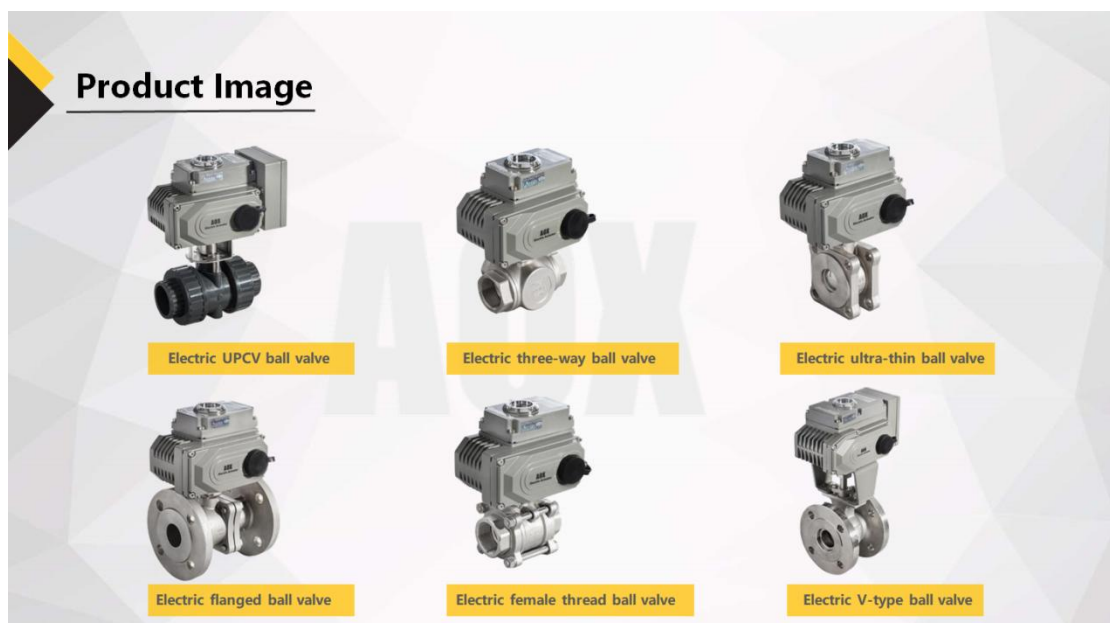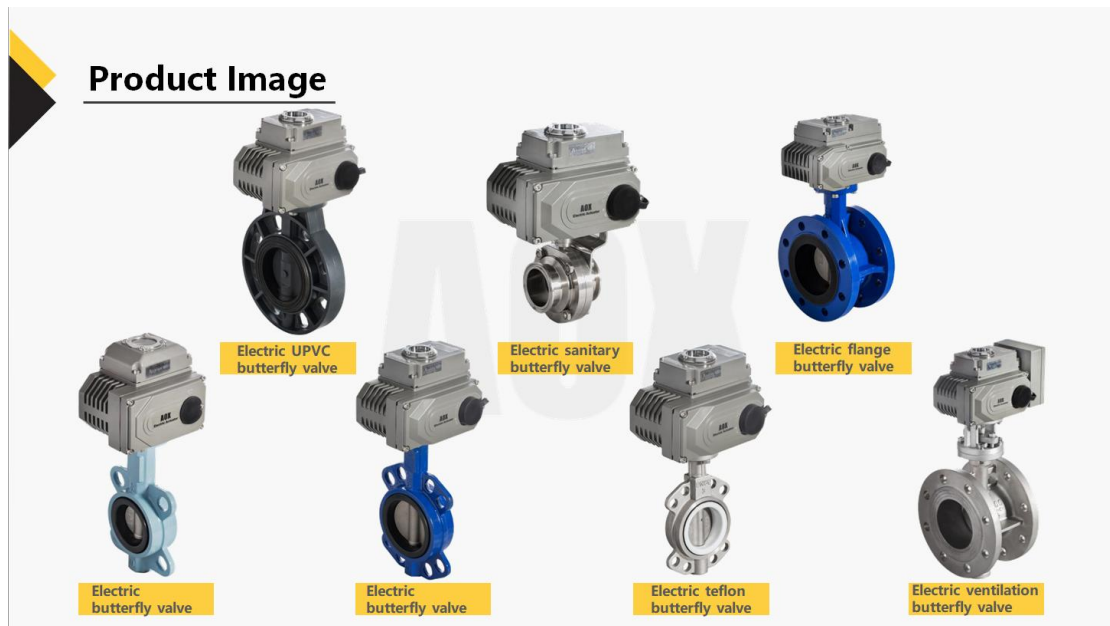

Economy part turn electric actuator Parameter (Specification)

Zhejiang Aoxiang Auto-Control Technology CO.,Ltd

Tel: [+86-577-59890750](tel:+86-577-59890750)

Phone: [+86-18967766527](tel:+86-18967766527)

Fax: [+86-0577-65921296](tel:+86-0577-65921296)

E-mail: zjaox@zjaox.com



Model	Max output torque	Operating Time 90° (90°)	Drive shaft(mm)		Power (W)	Rated current (A) 220VAC/1ph	Weight (kg)
	N·M		Square	Deep			
AOX-R-003	30	20	11×11	15.5	8	0.25	2.1
AOX-R-005	50	30	14×14	18	10	0.24	3.6
AOX-R-008	80	30	14×14	18	10	0.26	3.6
AOX-R-010	100	30	17×17	22.5	15	0.40	4.6
AOX-R-015	150	40	17×17	22.5	15	0.42	4.6
AOX-R-020	200	30	22×22	26	60	0.28	13
AOX-R-030	300	30	22×22	26	60	0.32	13.4
AOX-R-040	400	30	22×22	26	60	0.34	13.8
AOX-R-060	600	40	27×27	32.5	60	0.35	14
AOX-R-080	800	40	27×27	32.5	90	0.56	14.3
AOX-R-100	1000	40	27×27	32.5	90	0.59	14.5
AOX-R-160	1600	60	Max Φ40	65	90	0.60	68
AOX-R-200	2000	60	Max Φ40	65	90	0.62	68
AOX-R-300	3000	120	Max Φ40	65	90	0.64	68
AOX-R-400	4000	200	Max Φ40	65	90	0.66	68
AOX-R-500	5000	200	Max Φ40	65	90	0.67	68

Economy part turn electric actuator Feature And Application

Torque range: 30~5000N.m

Ambient temperature: -20°C~+70°C

Protection: IP67, (IP68 optional)

Material of Actuator Body: Aluminium Alloy

Related humidity: <90%(25°C).

Manual Override: N/A

Type of Modulating Signal: 0-10V, 2-10V, 4-20mA, etc.

Type of Field-bus Signal: Modbus-RTU, Profibus-DP, etc.

Local Controller: AOX remote control(Optional)

Zhejiang Aoxiang Auto-Control Technology CO.,Ltd

Tel: [+86-577-59890750](tel:+86-577-59890750)









Phone: [+86-18967766527](tel:+86-18967766527)

Fax: [+86-0577-65921296](tel:+86-0577-65921296)

E-mail: zjaox@zjaox.com











Comparison With Other Products (Eight Major Improvements)

Other manufacturers	Description	Other manufacturers	Description
	The gasket is easily deformed by temperature and other reasons, resulting in reduced sealing performance, which is not very aesthetically pleasing.		The combination of upper and lower cover adopts concave and convex structure, inner gasket O-ring, strong sealing performance, beautiful appearance, high protection level, more convenient for debugging and wiring, only need to open the upper cover
	The use of chemical adhesives may lead to ageing and water ingress due to high temperatures and pressures on site, and the plastic and glazing are easily damaged.		Convex mirror surface, no water accumulation; and continuous valve opening indication, more convenient observation, external metal, not easy to damage
	Ordinary terminal blocks, in the field of temperature difference or vibration, will cause the fastening screws to loosen, resulting in poor contact phenomenon.		The use of self-actuating pop-up terminals guarantees absolute reliability and is a symbol of high-end products.
	The gearboxes are made of plastic, and individual manufacturers use powder alloys for the gears, which are prone to wear.		The gearbox is made of 40Cr, refined by three heat treatments, more solid and reliable

Patent No.: ZL 2013 3 0145624.9
 ZL 2013 3 0145691.0
 ZL 2013 3 0112341.4
 ZL 2013 3 0112302.4



Comparison With Other Products (Eight Major Improvements)

	Spanner not fixed to the case, easily lost		The spanner is placed on the box, so it is not easily lost on site and is easy to use
	Regulated modules have built-in, electronic components that are affected by the temperature generated during operation.		The adjustment module is mounted externally and the bare board dissipates heat better, solving the contradiction that the maximum temperature of the actuator is 120° C while the temperature of the electronic components of the module is only 55° C. The weak control power supply is used and the quality of the module will not be affected by the unstable voltage on site.
	The screws of other manufacturers' housings are not equipped with an anti-dislodgement function, which can easily lead to the dislodgement of the screws during maintenance when removing the housing at height.		The top cover bolts are specially designed not to come off during maintenance and installation. All external bolts are made of stainless steel and will not rust
	Other manufacturers use M3 screws for unrealistic positioning, inaccurate, slippery threads, M3 spanners are not easy to find on site and other drawbacks.		AOX has improved the electrical cam structure by integrating the four cams into two and isolating them with a butterfly shaped bullet, topped with an anti-loosening nut, and using imported Omron travel switches.

Patent No.: ZL 2013 3 0111005.8
 ZL 2013 3 0111120.5
 ZL 2013 3 0111352.0



Ecnomy part turn electric actuator Details

1. Firm corrosion-resistant housing: The shell of economy part turn electric actuator is made of aluminum alloy, with anodic oxidation treatment and polyester powder coating. It is strong corrosion-resistant and enclosure IP67, NEMA 4 and 6, IP68 is optional.

Zhejiang Aoxiang Auto-Control Technology CO.,Ltd

Tel: +86-577-59890750

Phone: +86-18967766527

Fax: +86-0577-65921296

E-mail: zjaox@zjaox.com



2. Easy set cams: Electronic limit switch of economy part turn electric actuator is controlled by cam. The position can be set accurately and conveniently without special tool.
3. Machinery self-locking: Accurate worm and worm gear transfer large torque, high efficiency, with self-locking, prevent inversion.

Our Advantages

Other



AOX



The mirror surface of AOX-R series smart quarter turn electric actuator adopts a convex lens, and the drainage port does not cause water accumulation; and has a continuous valve opening indication, which is more convenient to observe, and is made of an external metal material, which is not easily damaged.

Zhejiang Aoxiang Auto-Control Technology CO.,Ltd

Tel: [+86-577-59890750](tel:+86-577-59890750)

Phone: [+86-18967766527](tel:+86-18967766527)

Fax: [+86-0577-65921296](tel:+86-0577-65921296)

E-mail: zjax@zjax.com