



www.aox-privod.com



Hot Sale Part Turn Electric Motor

Operated Valve Actuator



AOX Hot sale part turn electric motor operated valve actuator is newly designed for special small ball valves and plug valves. Over the years, our AOX hot sale part turn electric motor operated valve actuator have been exported in batches every year, and have been widely and successfully used in

the water treatment, oil, power, chemical industry and other industries. AOX is a manufacturer of electric actuators in China. AOX will solidly design and manufacture its products and continue to work hard to create more value for its customers.

AOX Hot sale part turn electric motor operated valve actuator

AOX Hot sale part turn electric motor operated valve actuator is newly designed for special small ball valves and plug valves. Over the years, our AOX hot sale part turn electric motor operated valve actuator have been exported in batches every year, and have been widely and successfully used in the water treatment, oil, power, chemical industry and other industries. AOX is a **manufacturer** of electric actuators in China. AOX will solidly design and manufacture its products and continue to work hard to create more value for its customers.



Zhejiang Aoxiang Auto-Control Technology CO.,Ltd

Tel: [+86-577-59890750](tel:+86-577-59890750)

Phone: [+86-18967766527](tel:+86-18967766527)

Fax: [+86-0577-65921296](tel:+86-0577-65921296)

E-mail: zjaox@zjaox.com



AOX Hot sale part turn electric motor operated valve actuator Introduction

AOX Hot sale part turn electric motor operated valve actuator can be applied to butterfly valve ball valve, etc. AOX attaches great importance to the design of fast angle stroke electric actuator, the design team has a strong product design and innovation ability. AOX has its own **factory** in **China**. AOX has complete intellectual property rights and multiple technology patents. We look forward to becoming your long-term partner in the near future.

Zhejiang Aoxiang Auto-Control Technology CO.,Ltd


Tel: [+86-577-59890750](tel:+86-577-59890750)

Phone: [+86-18967766527](tel:+86-18967766527)

Fax: [+86-0577-65921296](tel:+86-0577-65921296)

E-mail: zjaxox@zjaxox.com

Structural Features

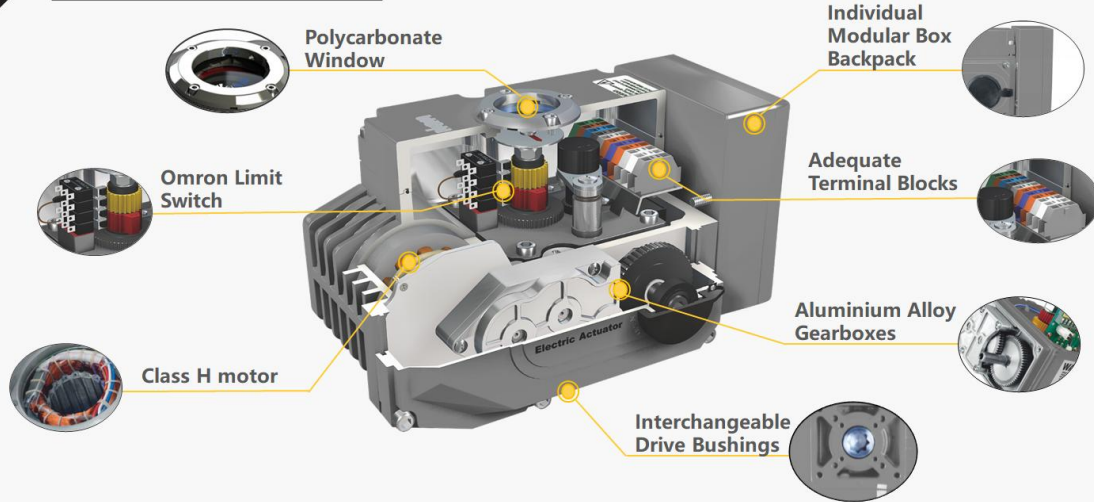

Product Image





Product Image



Electric UPCV ball valve



Electric three-way ball valve



Electric ultra-thin ball valve



Electric flanged ball valve



Electric female thread ball valve



Electric V-type ball valve



AOX Hot sale part turn electric motor operated valve actuator Parameter (Specification)

Model	Max output torque	Operating Time 90°	Drive shaft(mm)		Power	Rated current (A)	Weight
	N·M	(90°)	Square	Deep	(W)	220VAC/1ph	(kg)
AOX-R-003	30	20	11×11	15.5	8	0.25	2.1
AOX-R-005	50	30	14×14	18	10	0.24	3.6
AOX-R-008	80	30	14×14	18	10	0.26	3.6
AOX-R-010	100	30	17×17	22.5	15	0.40	4.6
AOX-R-015	150	40	17×17	22.5	15	0.42	4.6
AOX-R-020	200	30	22×22	26	60	0.28	13
AOX-R-030	300	30	22×22	26	60	0.32	13.4
AOX-R-040	400	30	22×22	26	60	0.34	13.8
AOX-R-060	600	40	27×27	32.5	60	0.35	14
AOX-R-080	800	40	27×27	32.5	90	0.56	14.3
AOX-R-100	1000	40	27×27	32.5	90	0.59	14.5
AOX-R-160	1600	60	Max Φ40	65	90	0.60	68
AOX-R-200	2000	60	Max Φ40	65	90	0.62	68
AOX-R-300	3000	120	Max Φ40	65	90	0.64	68
AOX-R-400	4000	200	Max Φ40	65	90	0.66	68
AOX-R-500	5000	200	Max Φ40	65	90	0.67	68

AOX Hot sale part turn electric motor operated valve actuator Feature And Application

Torque range: 30~5000N.m

Switching time: 20~200 S(2.5S,5S,10S Optional)

Weight: 2.1 KGS~68 KGS

Protection: IP67, (IP68 optional)

Manual Override: N/A

Mounting Flange (ISO 5211): F04/F05/F07/F10/F12/F14/F16

Type of On-off Signal: Contact signal. Pulse signal

Zhejiang Aoxiang Auto-Control Technology CO.,Ltd

Tel: [+86-577-59890750](tel:+86-577-59890750)









Phone: [+86-18967766527](tel:+86-18967766527)

Fax: [+86-0577-65921296](tel:+86-0577-65921296)

E-mail: zjaox@zjaox.com











Comparison With Other Products (Eight Major Improvements)

Other manufacturers	Description	Other manufacturers	Description
	The gasket is easily deformed by temperature and other reasons, resulting in reduced sealing performance, which is not very aesthetically pleasing.		The combination of upper and lower cover adopts concave and convex structure, inner gasket O-ring, strong sealing performance, beautiful appearance, high protection level, more convenient for debugging and wiring, only need to open the upper cover
	The use of chemical adhesives may lead to ageing and water ingress due to high temperatures and pressures on site, and the plastic and glazing are easily damaged.		Convex mirror surface, no water accumulation; and continuous valve opening indication, more convenient observation, external metal, not easy to damage
	Ordinary terminal blocks, in the field of temperature difference or vibration, will cause the fastening screws to loosen, resulting in poor contact phenomenon.		The use of self-actuating pop-up terminals guarantees absolute reliability and is a symbol of high-end products.
	The gearboxes are made of plastic, and individual manufacturers use powder alloys for the gears, which are prone to wear.		The gearbox is made of 40Cr, refined by three heat treatments, more solid and reliable

Patent No.: ZL 2013 3 0145624.9
 ZL 2013 3 0145691.0
 ZL 2013 3 0112341.4
 ZL 2013 3 0112302.4



Comparison With Other Products (Eight Major Improvements)

	Spanner not fixed to the case, easily lost		The spanner is placed on the box, so it is not easily lost on site and is easy to use
	Regulated modules have built-in, electronic components that are affected by the temperature generated during operation.		The adjustment module is mounted externally and the bare board dissipates heat better, solving the contradiction that the maximum temperature of the actuator is 120° C while the temperature of the electronic components of the module is only 65° C. The weak control power supply is used and the quality of the module will not be affected by the unstable voltage on site.
	The screws of other manufacturers' housings are not equipped with an anti-dislodgement function, which can easily lead to the dislodgement of the screws during maintenance when removing the housing at height.		The top cover bolts are specially designed not to come off during maintenance and installation. All external bolts are made of stainless steel and will not rust
	Other manufacturers use M3 screws for unrealistic positioning, inaccurate, slippery threads, M3 spanners are not easy to find on site and other drawbacks.		AOX has improved the electrical cam structure by integrating the four cams into two and isolating them with a butterfly shaped bullet, topped with an anti-loosening nut, and using imported Omron travel switches.

Patent No.: ZL 2013 3 0111005.8
 ZL 2013 3 0111120.5
 ZL 2013 3 0111352.0



AOX Hot sale part turn electric motor operated valve actuator details

1. Firm corrosion-resistant housing: The shell is made of aluminum alloy, with anodic oxidation treatment and polyester powder coating. It is strong corrosion-resistant and enclosure IP67, NEMA 4 and 6, IP68 is optional.

Zhejiang Aoxiang Auto-Control Technology CO., Ltd

Tel: +86-577-59890750

Phone: +86-18967766527

Fax: +86-0577-65921296

E-mail: zjaox@zjaox.com



www.aox-privod.com

2. Wide torque range: The torque of AOX hot sale part turn electric motor is form 30Nm-5000Nm.
3. Multi-voltage: The voltage of AOX hot sale part turn electric motor can be 220VAC, 380VAC, 110VAC and 24VDC.

Zhejiang Aoxiang Auto-Control Technology CO.,Ltd

Tel: +86-577-59890750

Phone: +86-18967766527

Fax: +86-0577-65921296

E-mail: zjax@zjax.com