


Pulley lagging materials

高耐磨包胶面板

Description:

Used for pulley lagging of low to medium loaded conveyor belt, reduce slippage between belt and pulley, improve and stabilize coefficient of friction, prevent the pulley against wear and corrosion, strong adhesive system with **CN bonding layer**.

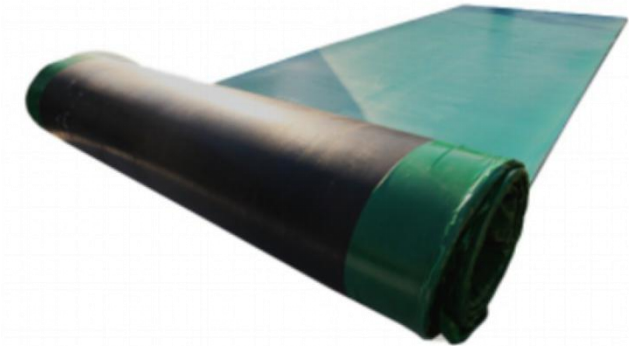

Thickness	Width	Length
3mm	1000mm	10m
5mm	1450mm	10m
8mm	1000/1200/1450/1650/1850/2000mm	10m
10mm	1000/1200/1450/1650/1850/2000mm	10m
12mm	1000/1200/1450/1650/1850/2000mm	10m
15mm	1000/1200/1450/1650/1850/2000mm	10m
20mm	1000/1200/1450/1650/1850/2000mm	10m
25mm	1000/1200/1450/1650/1850/2000mm	10m
30mm	1000/1200/1450/1650/1850/2000mm	10m

	Color	Polymer	Density	Tensile strength	Hardness
Fire retardant	black	NR/BR	1.35	15MPA	Shore A 65±5
Non-flammable	black	NR/BR	1.32	8MPA	Shore A 65±5

Diamond lagging rubber sheet

菱形胶板

Description:

Grooved rubber lagging used for drive pulleys of low to medium loaded conveyor belt, reduce slippage between belt and pulley, improve and stabilize coefficient of friction, prevent the pulley against wear and corrosion, strong adhesive system with **CN bonding layer**.



diamond type:78x45 mm



diamond type:35x18 mm

Thickness	Width	Length
8mm	1000/1200/1450/1650/1850/2000mm	10m
10mm	1000/1200/1450/1650/1850/2000mm	10m
12mm	1000/1200/1450/1650/1850/2000mm	10m
15mm	1000/1200/1450/1650/1850/2000mm	10m
20mm	1000/1200/1450/1650/1850/2000mm	10m
25mm	1000/1200/1450/1650/1850/2000mm	10m
30mm	1000/1200/1450/1650/1850/2000mm	10m

	Color	Polymer	Density	Tensile strength	Hardness
Fire retardant	black	NR/BR	1.35	15MPA	Shore A 65 ± 5
Non-flammable	black	NR/BR	1.32	8MPA	Shore A 65 ± 5

Ceramic lagging rubber sheet

陶瓷胶板


Description:

Vulcanised alumina oxide Al₂O₃ ceramic tiles, used for drive pulleys, operating under wet ,clay-containing, muddy and extreme conditions, highly wear resistant, strong adhesive system with **CN bonding layer**

Thickness	Width	Length
12/15/20mm	100-500mm	1200mm
12/15/20mm	100-500mm	1450mm
12/15/20mm	100-500mm	1650mm
12/15/20mm	100-500mm	1850mm
12/15/20mm	100-500mm	2100mm
12/15/20mm	100-500mm	10m

Technical data:

Al₂O₃ ≥ 92% hardness:60± 5 shore A Tensile strength:14mpa

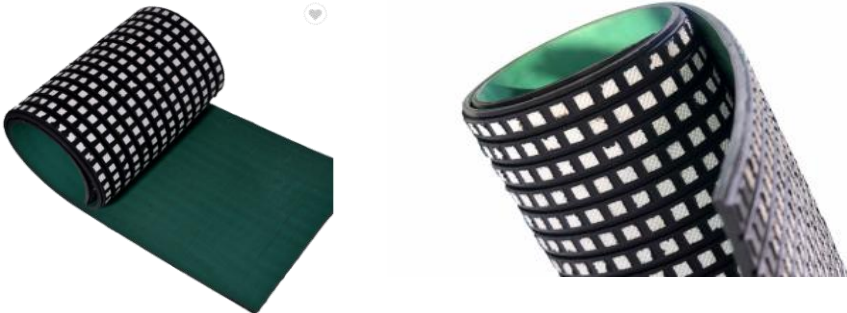

Sealing skirt board

密封裙边

Description:

Good sealing properties for conveyor belt transporting materials.

Color: black without bonding layer

Polymer: NR/SBR

Hardness: Shore A 60±5

Thickness	Width	Length
8mm	100-2000mm	10m
10mm	100-2000mm	10m
12mm	100-2000mm	10m
15mm	100-2000mm	10m
20mm	100-2000mm	10m
25mm	100-2000mm	10m
30mm	100-2000mm	10m

