



Separate Vacuum Autoloader

Separate Vacuum Autoloader: AUMAX AML-800G(2) standard split divided type vacuum hopper loader is equipped with three phases powerful induction type air pump. The plastic feeding machine is special designed to transport plastic material from storage tank into hopper dryer on the injection molding machines. The vacuum hopper of autoloader is installed on

hopper dryer or feeding hopper of injection molding machine, and the main body is installed on the floor beside the injection machine. The feeding capacity of AML-800G(2) hopper loader is 300~400Kg/hour.

Separate Vacuum Autoloader

1. Separate Vacuum Autoloader Introduction

AUMAX AML-800G(2) standard split divided type vacuum hopper loader is equipped with three phases powerful induction type air pump. The plastic feeding machine is special designed to transport plastic material from storage tank into hopper dryer on the injection molding machines. The vacuum hopper of autoloader is installed on hopper dryer or feeding hopper of injection molding machine, and the main body is installed on the floor beside the injection machine. The feeding capacity of AML-800G(2) hopper loader is 300~400Kg/hour.

2. Separate Vacuum Autoloader Parameter (Specifications)

Model	Motor		Capacity (Kg/h)	Hopper Size (L)	Pipe diameter (mm)	Dimensions (mm)	Weight (Kg)
	Type	Power					
AML-800G	Induction	2HP/3Phases	300-400	6	Ø38	650x 450 x400	55
AML-800G2	Induction	3HP/3Phases	400-500	6	Ø38	650x 450 x400	65

Please excuse for not note if some specifications of products are changed!

Note:

Ningbo Aumax Plastic Machinery Co., Ltd

Address: No. 216, Lianhe Rd., Ningbo Economic & Tech Development Zone, Beilun, Ningbo, China

Phone: +86-13819843291

Tel: +86-574-26850648


Fax: +86-574-26855258

E-mail: sales@aumax-plast.com

- 1) The test condition of conveying capacity: vertical distance 4 meters, horizontal distance 1 meter.
- 2) The standard power voltage for AML-800G(2) is 3Ø 380V 50/60Hz. Other voltage such as 220V/60Hz, 400V/50Hz, 415V/50Hz, 440V/60Hz, 480V/60Hz is available.

3. Separate Vacuum Autoloader Features & Application

AML-700G/800G/800G2 Installation Drawing

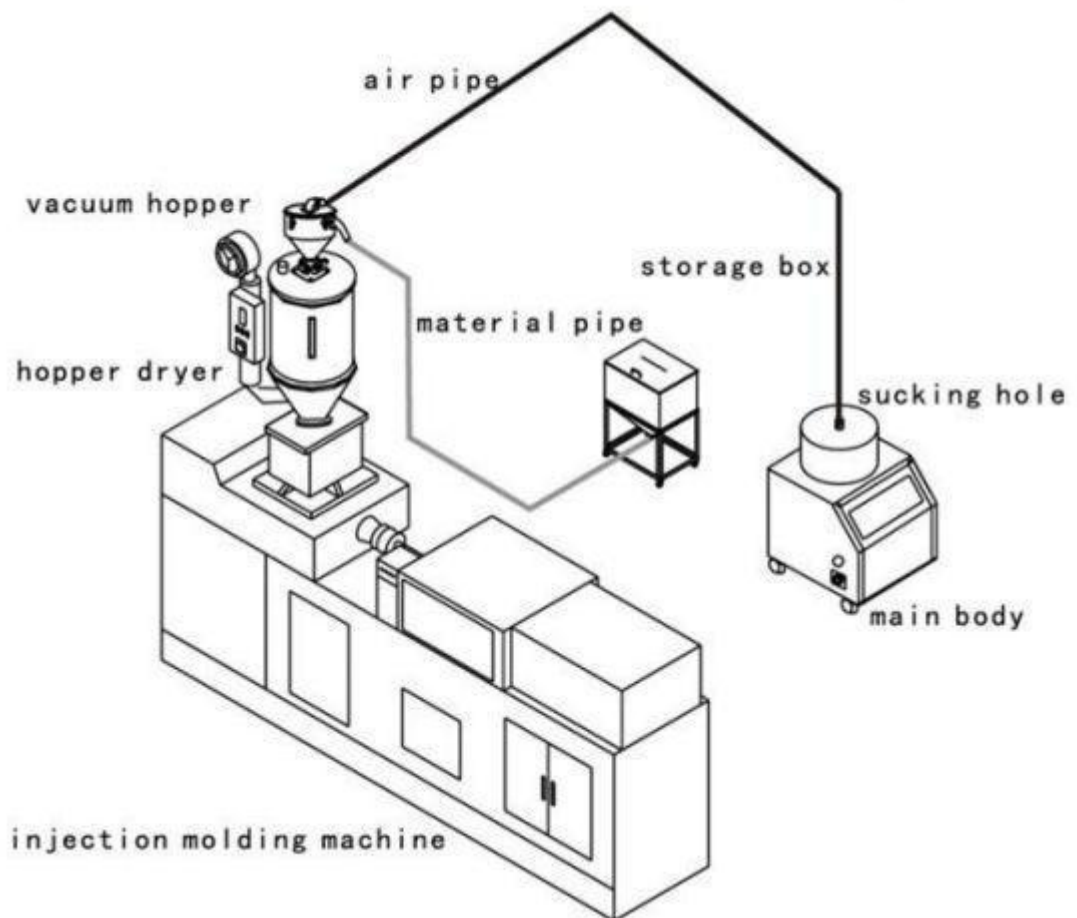

1. Aumax separate type vacuum hopper loader equipped with micro computer and remote controller.
2. Material shortage alarm to inform workers to charge plastic materials.
3. The vacuum hopper of autoloader is made of stainless steel to keep plastic resin without pollution.
4. This plastic vacuum autoloader can work with proportional valve for two materials.

Ningbo Aumax Plastic Machinery Co., Ltd

Address: No. 216, Lianhe Rd., Ningbo Economic & Tech Development Zone, Beilun, Ningbo, China

Phone: +86-13819843291

Tel: +86-574-26850648

Fax: +86-574-26855258

E-mail: sales@aumax-plast.com

4. FAQ

1. Q: What is the MOQ?

A: The MOQ is 1 set for all products..

2. Q: Where is the loading port?

A: The nearest port to our factory is port of Ningbo, China, as well as we can send machine to Yiwu, Shanghai, Guangdong or any other cities in China.

3. Q: What are the payment terms?

A: The preferential payment term is T/T, while other payment terms are negotiable.

4. Q: What are your terms of delivery?

A: We accept FOB, CFR, CIF, EXW, and DDU. You can choose the terms which is the most convenient and cost effective to you.

5. Q: How does your factory carry out quality control?

A: Powerful R&D teams and professional QC department take care of every detail during design, processing, assembling, testing and packing.

6. Q: Can you supply OEM and customized products?

A: Yes, we can supply OEM / ODM service. Our engineers have rich experience in design and production of plastic auxiliary equipment. We can supply special products according to your ideas and drawings.

7. Q: What about warranty terms?

A: We provide one year warranty for all of our products. During warranty period, if any machine parts damaged due to quality, we will send the new parts by courier immediately by free of charge. Also, we supply 24 hours online service and technical support.