

TCN 85°C 1000H. Non-Polarized SMD Electrolytic Capacitor

Non-polarized with general temperature +85°C


Load life of 1000 hours

RoHS & REACH compliant, Halogen-free

SPECIFICATIONS

Items	Characteristics																			
Operation Temperature Range	-40 ~ +85°C																			
Voltage Range	6.3 ~ 50V																			
Capacitance Range	0.1 ~ 100μF																			
Capacitance Tolerance	±20% at 120Hz, 20°C																			
Leakage Current	Leakage current ≤ 0.05CV or 10μA, whichever is greater (after 2 minutes application of rated voltage at 20°C) C: Nominal capacitance (μF) V: Rated voltage (V)																			
Dissipation Factor (tan δ)	Measurement frequency : 120Hz, Temperature : 20°C <table border="1"> <tr> <td>Rated Voltage (V)</td> <td>6.3</td> <td>10</td> <td>16, 25</td> <td>35, 50</td> </tr> <tr> <td>tan δ (max.)</td> <td>0.24</td> <td>0.20</td> <td>0.17</td> <td>0.15</td> </tr> </table>					Rated Voltage (V)	6.3	10	16, 25	35, 50	tan δ (max.)	0.24	0.20	0.17	0.15					
Rated Voltage (V)	6.3	10	16, 25	35, 50																
tan δ (max.)	0.24	0.20	0.17	0.15																
Stability at Low Temperature	Measurement frequency : 120Hz <table border="1"> <tr> <td>Rated Voltage (V)</td> <td>6.3</td> <td>10</td> <td>16, 25</td> <td>35, 50</td> </tr> <tr> <td>Impedance Ratio</td> <td>Z(-25°C) / Z(20°C)</td> <td>4</td> <td>3</td> <td>2</td> </tr> <tr> <td>ZT/Z20 (max.)</td> <td>Z(-40°C) / Z(20°C)</td> <td>8</td> <td>6</td> <td>4</td> </tr> </table>					Rated Voltage (V)	6.3	10	16, 25	35, 50	Impedance Ratio	Z(-25°C) / Z(20°C)	4	3	2	ZT/Z20 (max.)	Z(-40°C) / Z(20°C)	8	6	4
Rated Voltage (V)	6.3	10	16, 25	35, 50																
Impedance Ratio	Z(-25°C) / Z(20°C)	4	3	2																
ZT/Z20 (max.)	Z(-40°C) / Z(20°C)	8	6	4																
Load Life	After 1000 hours application of the rated voltage at 85°C (the polarity needs to exchange every 250 hours), they meet the characteristics listed below. <table border="1"> <tr> <td>Capacitance Change</td> <td>Within ±20% of initial value</td> </tr> <tr> <td>Dissipation Factor</td> <td>200% or less of initial specified value</td> </tr> <tr> <td>Leakage Current</td> <td>initial specified value or less</td> </tr> </table>					Capacitance Change	Within ±20% of initial value	Dissipation Factor	200% or less of initial specified value	Leakage Current	initial specified value or less									
Capacitance Change	Within ±20% of initial value																			
Dissipation Factor	200% or less of initial specified value																			
Leakage Current	initial specified value or less																			
Shelf Life	After leaving capacitors under no load at 85°C for 1000 hours, they meet the specified value for load life characteristics listed above.																			
Resistance to Soldering Heat	After reflow soldering and restored at room temperature, they meet the characteristics listed below. <table border="1"> <tr> <td>Capacitance Change</td> <td>Within ±10% of initial value</td> </tr> <tr> <td>Dissipation Factor</td> <td>initial specified value or less</td> </tr> <tr> <td>Leakage Current</td> <td>initial specified value or less</td> </tr> </table>					Capacitance Change	Within ±10% of initial value	Dissipation Factor	initial specified value or less	Leakage Current	initial specified value or less									
Capacitance Change	Within ±10% of initial value																			
Dissipation Factor	initial specified value or less																			
Leakage Current	initial specified value or less																			
Marking	Black print on the case top.																			

DRAWING (Unit: mm)

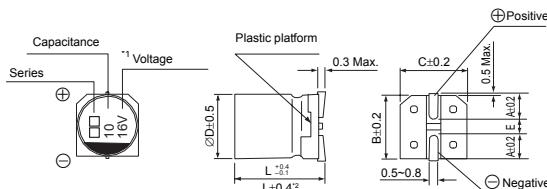

*1. Voltage mark for 6.3V is [6V]

*2. Applicable to Ø6.3×7.7

DIMENSIONS (Unit: mm)

ØD x L	4 x 5.4	5 x 5.4	6.3 x 5.4	6.3 x 7.7
A	2.0	2.2	2.6	2.6
B	4.3	5.3	6.6	6.6
C	4.3	5.3	6.6	6.6
E ± 0.2	1.0	1.4	1.9	1.9
L	5.4	5.4	5.4	7.7

DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

WV Code μF	6.3		10		16		25		35		50	
	Case size	Ripple current										
0.1	104										4 × 5.4	1.0
0.22	224										4 × 5.4	2.0
0.33	334										4 × 5.4	2.8
0.47	474										4 × 5.4	4.0
1	105										4 × 5.4	8.4
2.2	225								4 × 5.4	8.4	5 × 5.4	13
3.3	335						5 × 5.4	12	5 × 5.4	16	5 × 5.4	17
4.7	475				4 × 5.4	12	5 × 5.4	16	5 × 5.4	18	6.3 × 5.4	20
10	106		4 × 5.4	17	5 × 5.4	23	6.3 × 5.4	27	6.3 × 5.4	29	6.3 × 7.7	36
22	226	5 × 5.4	28	6.3 × 5.4	33	6.3 × 5.4	37	6.3 × 7.7	50	6.3 × 7.7	54	
33	336	6.3 × 5.4	37	6.3 × 5.4	41	6.3 × 5.4	49	6.3 × 7.7	61			
47	476	6.3 × 5.4	45	6.3 × 7.7	61	6.3 × 7.7	75					
100	107	6.3 × 7.7	82	6.3 × 7.7	85							

• Case size ØD×L(mm), ripple current (mA rms) at 85°C, 120Hz

FREQUENCY COEFFICIENT OF ALLOWABLE RIPPLE CURRENT

Frequency	50Hz	120Hz	300Hz	1KHz	10KHz~
Coefficient	0.70	1.00	1.17	1.36	1.50

The endurance of capacitors is reduced with internal heating produced by ripple current at the rate of halving the lifetime with every 5~10°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.

◆ How to order

TCN	A	106	M	0035	0505	R	000	Suffix Indicate Special Requirement
Type	Material Code	Capacitance Code	Tolerance	Rated Voltage	Size Code	Package Code		000: Indicating Standard
TCN	A: Aluminum Cap For TCS, TCK TFZ TKZ....etc.	pF Code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow) 106 = 10uF 107 = 100uF	M: +/-20%	Code 0035: 35VDC	Code 0505: Size 5x5.4mm	R: Tape & Reel		
				For DC Voltage 0006: 6.3VDC 0035: 35VDC 0050: 50VDC	Size for V-chip E-cap 0405: Size 4x5.4mm 0605: Size 6.3x5.4mm 0607: Size 6.3x7.7mm			

Note: Specification is subject to change without further notice. For more details and updates, please visit our website.