


MBRS340

SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

Reverse Voltage - 40 Volts Forward Current - 3.0 Amperes

DO-214AB

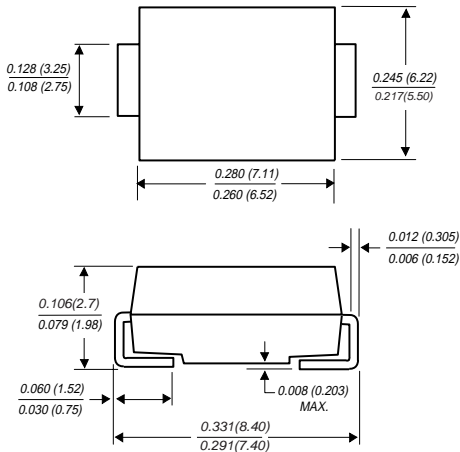

Dimensions in inches and (millimeters)

FEATURES

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ For surface mounted applications
- ◆ Metal silicon junction, majority carrier conduction
- ◆ Low power loss, high efficiency
- ◆ Built-in strain relief, ideal for automated placement
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed: 250°C/10 seconds at terminals

MECHANICAL DATA

Case: JEDEC DO-214AC molded plastic body
Terminals: leads solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

| | SYMBOLS | MBRS340 | UNITS |
|---|-----------------|-------------|--------------------|
| Maximum repetitive peak reverse voltage | V_{RRM} | 40 | VOLTS |
| Maximum RMS voltage | V_{RMS} | 28 | VOLTS |
| Maximum DC blocking voltage | V_{DC} | 40 | VOLTS |
| Maximum average forward rectified current at T_L (see fig. 1) | $I_{(AV)}$ | 3.0 | Amps |
| Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) | I_{FSM} | 70.0 | Amps |
| Maximum instantaneous forward voltage at 3.0A | V_F | 0.55 | Volts |
| Maximum DC reverse current $T_A=25^\circ\text{C}$ at rated DC blocking voltage $T_A=100^\circ\text{C}$ | I_R | 0.5 20 | mA |
| Typical junction capacitance (NOTE 1) | C_J | 500 | pF |
| Typical thermal resistance (NOTE 2) | $R_{\theta JA}$ | 55.0 | $^\circ\text{C/W}$ |
| Operating junction temperature range | T_J | -65 to +125 | $^\circ\text{C}$ |
| Storage temperature range | T_{STG} | -65 to +150 | $^\circ\text{C}$ |

Note: 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

2. P.C.B. mounted with 0.2x0.2" (5.0x5.0mm) copper pad areas

RATINGS AND CHARACTERISTIC CURVES MBR340

