



Multi hole brass cable gland



JIXIANG CONNECTOR® Multi hole brass cable gland is used for 2-8 core cables, to make sure each wire to get the best waterproof insulation, and not intertwined. Jixiang is professional manufacturer in China, we can provide professional service and better price for you.

Product Description

As a professional high quality JIXIANG CONNECTOR® Multi hole brass cable gland manufacture, you can rest assured to buy Multi hole brass cable gland from our factory and we will offer you the best after-sale service and timely delivery. We have the distinct advantage because the success of our company is directly related to each and every individual. We take pride in all we do, and we take pride in a job well done.

High Quality Multi Hole Brass Cable Gland with CE

Multi Hole Brass Cable Gland Introduction

JIXIANG CONNECTOR® Multi hole brass cable gland may be used on all types of electrical power, control, instrumentation, data and telecommunications cables.

They are used as a sealing and termination device to ensure that the characteristics of the enclosure which the cable enters can be maintained adequately.

In application, Brass multi hole cable gland is an economic solution, not only can significantly reduce construction time and reduce costs,

but also reduce the space occupied by the outlet hole.

Multi Hole Brass Cable Gland Parameter (Specification)


Thread Size	Flat (mm)	2 holes (mm)	3 holes (mm)	4 holes (mm)	5 holes (mm)	6 holes (mm)	7 holes (mm)	8 holes (mm)
M12x1.5	/	3-1.2	2.6-1.2	2.3-1	/	/	/	/
M16x1.5	/	4-1.6	2.6-1.2	2.3-1	2.5-1	2-1	/	/
M18x1.5	6x10	3.5-2	4-1.6	3-1.2	2.6-1.5	2.2-1	/	/
M20x1.5	5x11.5	5.3-1.5	5-2	4.2-1.7	3-1.2	3-1.2	3-1.2	3-1.2

M22x1.5	6x14	6-2.5	3.5-1.5	4.5-2	/	/	/	/
M25x1.5	6x14	8.7-4	8-4	5-2	3.5-1.5	3.5-1.5	3.5-1.5	3.5-1.5
M27x1.5	7x18	8.7-4.5	5-2	7-3.5	3.5-1.5	3.5-1.5	3.5-1.5	3.5-1.5
M32x1.5	8x22	5-10	10-5	9-4.5	8-4	7-3.5	6-3	/
PG7	/	3-1.2	2.6-1.2	2.3-1	/	/	/	/
PG9	/	4-1.6	2.6-1.2	2.3-1	2.5-1	2-1	/	/
PG11	6x10	3.5-2	4-1.6	3-1.2	2.6-1.5	2.2-1	/	/
PG13.5	5x11.5	5.3-1.5	3.5-1.5	4.2-1.7	4.2-1.7	/	/	/
PG16	6x14	6-2.5	3.5-1.5	4.5-2	/	/	/	/
PG21	7x18	8.7-4.5	5-2	7-3.5	3.5-1.5	3.5-1.5	3.5-1.5	/
G1/2	5x11.5	5.3-1.5	5-2	4.2-1.7	3-1.2	3-1.2	3-1.2	3-1.2
G3/4	7x18	8.7-4.5	5-2	7-3.5	3.5-1.5	3.5-1.5	3.5-1.5	3.5-1.5
G1	8x22	10-5	10-5	9-4.5	8-4	7-3.5	6-3	/

Multi Hole Brass Cable Gland Feature And Application

Features: The JIXIANG CONNECTOR® Multi hole brass cable gland is a product of large scope, high tensile strength, waterproof, dustproof, salt, acid and alkali resistance, alcohol, oil and solvent resistance.

Function: Multi hole brass cable gland is the product forms a complete set of the cable, connector cable can be locked, and the other end can access the devices through the box body, also can choose thread access according to the entry and outlet of the internal thread electric devices.

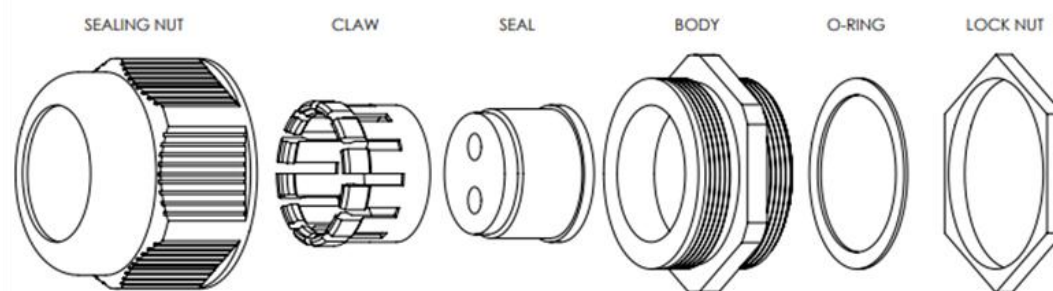

How to install multi hole brass cable gland?

1. Begin by opening the multi hole brass cable gland and detaching the nut
2. Screw the gland body with O-ring into the corresponding thread hole on gland plate.
3. Insert cable to gland body. Adjust sealing nut, claw and seal to correct position.
4. Adjust the cable to make sure the each cable passed the holes in the seal. Manually tighten the sealing nut for temporary fixing.

5. Use a spanner to tighten each gland part until the cable is securely fastened. Double check the cable connection and the position if necessary.

More options: Customization is acceptable. Welcome to inquire



MECHANICAL EQUIPMENT



LIGHTING EQUIPMENT



NEW ENERGY VEHICLE



PHOTOVOLTAIC (PV)



OUTDOOR ADVERTISEMENTS



WHEEL TRANSPORT DOCK

Multi hole brass cable gland Details

Product material: The Multi hole brass cable gland body parts are made of brass, the clamping part is made of nylon (PA), and the seals and O-ring are made of nitrile rubber (NBR).

Certificates: CE, ROHS,IP68, ISO9001, TUV

Protection Degree: In the specific cable range, the using of O-ring helps tighten head so that to reach IP68-10 bar.

Working Temperature: : -40°C to 100 °C, short time of up to 120°C. Dynamic: - 20 °C to 80 °C, short time of up to 100 °C

Multi hole brass cable gland Qualification

Certificates of PG Cable Gland CE,ROHS, REACH, IP68,ISO9001,TUV



Deliver,Shipping And Serving

Delivery of PG Cable Gland Normally 7 working days to 1 month after received the payment.

Jixiang can provide professional service and better price for you. If you interested in multi hole brass cable gland, please contact with us. We follow the quality of rest assured that the price of conscience, dedicated service. We have achieved remarkable success in this domain as a result of our focused approach, timely delivery, and ethical company philosophy.