



Nylon Gland Divided Structure Metric Thread

JIXIANG CONNECTOR® Nylon gland Divided Structure Metric Thread are devices that you can attach to the end of a cable, to secure it to the equipment, as well as keep the wires tidy and protect electrical components against mechanical and environmental forces such as dust and moisture by connecting the cables securely to casings. Welcome to contact us for designing & ordering different sizes.

Product Description

Find a huge selection of Nylon Gland Divided Structure Metric Thread, Nylon Gland Divided Structure PG Thread, Nylon gland Divided Structure G Thread from China at Yueqing Jixiang Connector Co., Ltd.. Provide professional after-sales service and the right price, looking forward to cooperation. "To achieve zero faults via continuous improvement, to satisfy our customers' needs and expectations, to make pledges we fully understand and think we can keep, and to keep all commitments to customers on schedule," is our guiding concept.

Fast Delivery High Quality Nylon Gland Divided Structure Metric Thread

Jixiang Nylon gland Divided Structure Metric Thread can customize different colors as your require, like blue and red, which means you can actually color code your cables for your data or telecommunications application, would certainly make maintenance work a lot easier and more efficient.

Nylon Gland Divided Structure Metric Thread Parameter (Specification)


Nylon Gland Divided Structure Metric Thread - Size Chart					
Product Code	Thread AG	Cable range (mm)	Thread O.D. C1 (mm)	Thread length GL (mm)	Spanner Size (mm)
JX-NLM12A-DS	M12*1.5	3-5.5	12	8.5	18/19
JX-NLM12B-DS		4.5-7.8	12	8.5	18/19
JX-NLM16C-DS		3-5.5	16	10	22/19

JX-NLM16D-DS	M16*1.5	4-8	16	10	22/19
JX-NLM16E-DS		3-5.5	16	15	22/19
JX-NLM16F-DS		4-8	16	15	22/19
JX-NLM16G-DS		4-7	16	10	22/22
JX-NLM16H-DS		6-10	16	10	22/22
JX-NLM16E-DS		4-7	16	15	22/22
JX-NLM16F-DS		6-10	16	15	22/22
JX-NLM20A-DS	M20*1.5	5-9	20	10	24/24
JX-NLM20B-DS		6-12.5	20	10	24/24
JX-NLM20C-DS		6-11	20	10	27/27
JX-NLM20D-DS		9-14	20	10	27/27
JX-NLM20E-DS		6-11	20	15	27/27
JX-NLM20F-DS		9-14	20	15	27/27
JX-NLM22A-DS	M22*1.5	6-11	22	10	27/27
JX-NLM22B-DS		9-14	22	10	27/27
JX-NLM25A-DS	M25*1.5	6-11	25	10	33/27
JX-NLM25B-DS		9-14	25	10	33/27
JX-NLM25C-DS		10-16	25	10	33/33
JX-NLM25D-DS		13-18	25	10	33/33
JX-NLM25E-DS		10-16	25	15	33/33
JX-NLM25F-DS		13-18	25	15	33/33
JX-NLM32A-DS	M32*1.5	15-22	32	15	41/42
JX-NLM32B-DS		18-25	32	15	41/42
JX-NLM40A-DS	M40*1.5	20-26	40	20	50/52
JX-NLM40B-DS		24-31	40	20	50/52
JX-NLM50A-DS	M50*1.5	25-33	50	22	62/62
JX-NLM50B-DS		31-41	50	22	62/62
JX-NLM63A-DS	M63*1.5	39-46	63	25	75/75

JX-NLM63B-DS		44-51	63	25	75/75
JX-NLM75A-DS	M75*2.0	50-56	75	25	92/92
JX-NLM75B-DS		56-66	75	25	92/92
JX-NLM90A-DS	M90*2.0	58-68	90	25	110/110
JX-NLM90B-DS		66-77	90	25	110/110

More options: Customization of Nylon gland Divided Structure Metric Thread is acceptable. Welcome to inquire.

The Drawing of Nylon gland Divided Structure Metric Thread .

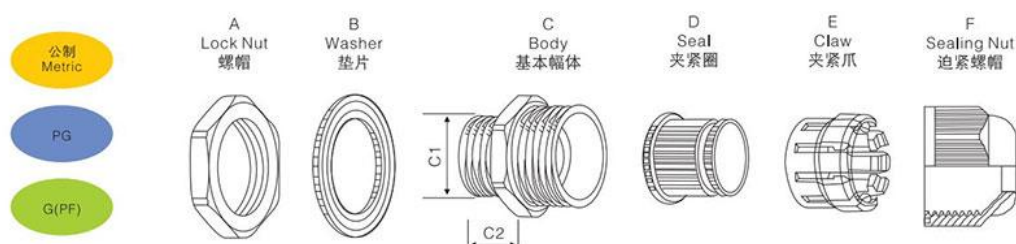

Nylon Gland Divided Structure Metric Thread Feature And Application

Our Nylon gland Divided Structure Metric Thread provide the highest degrees of functionality and safety. Features as blow:

IP68 waterproof rating

Indoor or Outdoor use

Minimum Assembly time

Wide Clamping Range

Multi Purpose Application

Resistant to Salt water, gasoline, alcohol, oil, grease, easter keyton ether, benzine, common solvent, weak acids & weak alkalies



Nylon Gland Divided Structure Metric Thread Details

Thread Specification: Metric Thread

Material: The Nylon gland Divided Structure Metric Thread body parts are made of PA66. Rubber is EPDM.

Working temperature: -40°C to 100°C in static state, or instantaneous heat resistance up to 120°C; -20°C to 80°C in dynamic state, or instantaneous heat resistance up to 100°C.

Protection level : IP 68-10 bar, waterproof, self-locking.

Colours: Black, White, other color available upon request

Nylon Gland Divided Structure Metric Thread Qualification

Certificates of Nylon gland Divided Structure Metric Thread: CE, ROHS, IP68, ISO9001



Deliver,Shipping And Serving of Nylon Gland Divided Structure Metric Thread

Delivery of Nylon gland Divided Structure Metric Thread Normally 7 working days to 1 month after received the payment.

FAQ

Q: Are you trading company or manufacturer ?

A:We are manufacturer directly.

Q:Do you have a catalogue?

A:Yes , We have. You can download it online or send an Email to us.

Q:Do you provide samples ? is it free or extra ?

A: Yes, we can provide 1pcs or 2pcs free samples but need freight collect. If more samples, also need pay charge.

Q : Can you make customized products and customized packing?

A: Yes. We can talk details after receiving your detailed request.

Q : How to ship my order ?

A: Your goods can be sent by international Express or by Air or By sea as your required.

Q:How long will I receive your quotation?

A:We will reply you as soon as possible, usually send the quotation within 1~3 hours after get your detailed requests at working time.

Recommend Products

Brass Cable Gland MG Series Metric Thread

JIXIANG CONNECTOR® Brass cable gland MG Series Metric Thread may be used on all types of electrical power, control, instrumentation, data and telecommunications cables.



Stainless Steel Cable Glands Metric Thread

JIXIANG CONNECTOR® Stainless steel cable glands Metric Thread is a kind of connection device often used in power system. It can be mainly applied to outdoor products, medium and large remote control machinery, and some equipment whose main body is in the outdoor control system and not on the main body. JiXiang Stainless steel cable glands Metric Thread has the advantages of smooth and delicate surface, clear stripes, standard thread, smooth and burr-free, etc.

