



PA66 Nylon Cable Gland

You can rest assured to buy customized JIXIANG CONNECTOR® PA66 Nylon Cable Gland from us. We look forward to cooperating with you, if you want to know more, you can consult us now, we will reply to you in time! Jixiang Connector is a professional manufacturer of PA66 Nylon Cable Gland, can provide custom designs, such as different thread types and special seals. Welcome to contact us for more details.

Product Description

You can rest assured to buy JIXIANG CONNECTOR® PA66 Nylon Cable Gland from our factory and we will offer you the best after-sale service and timely delivery. We have achieved remarkable success in this domain as a result of our focused approach, timely delivery, and ethical company philosophy.

IP68 Waterproof Nylon PA66 Cable Gland


JIXIANG CONNECTOR'S PA66 Nylon Cable Gland is decomposed into six small parts: lock nut, washer, body, seal, claw and sealing nut. The claws and seals of excellent design, can hold cable firmly and have a wider cable range.

What is PA66:

PA66 is a dyadic nylon we can produce by high-temperature melt polymerization of adipic acid and hexamethylenediamine.

High strength and stiffness at high temperature and good abrasion and wear resistance. That's why PA66 Cable Gland are widely used in many different markets and applications due to their excellent performance/ cost ratios.

The Drawing of PA66 Nylon Cable Gland:

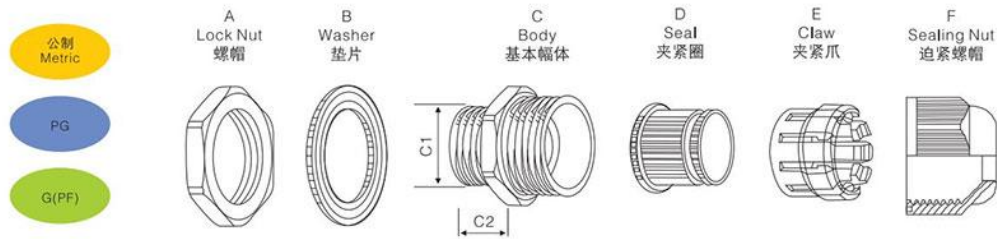

PA66 Nylon Cable Gland Parameter (Specification)

PA66 Nylon Cable Gland Size Chart -- PG Thread					
Product Code	Thread AG	Cable range (mm)	Thread O.D. C1(mm)	Thread length GL(mm)	Spanner Size (mm)
JX-NLPG7A-DS	PG7	3-5.5	12.5	8	17/19
JX-NLPG7B-DS		4.5-7.8	12.5	8	17/19
JX-NLPG9A-DS	PG9	3-5.5	15.2	8.2	22/19
JX-NLPG9B-DS		4.5-7.8	15.2	8.2	22/19
JX-NLPG11A-DS	PG11	4-7	18.6	10	24/22
JX-NLPG11B-DS		6-10	18.6	10	24/22
JX-NLPG13.5A-DS	PG13.5	5-8.8	20.4	10	27/24
JX-NLPG13.5B-DS		7-12.5	20.4	10	27/24
JX-NLPG16A-DS	PG16	6-11	22.5	10.8	30/27
JX-NLPG16B-DS		9-14	22.5	10.8	30/27
JX-NLPG21A-DS	PG21	10-16	28.3	12	36/33
JX-NLPG21B-DS		13-18	28.3	12	36/33
JX-NLPG29A-DS	PG29	15-22	37	12	46/41
JX-NLPG29B-DS		18-25	37	12	46/41
JX-NLPG36A-DS	PG36	20-26	47	14	57/52
JX-NLPG36B-DS		24-31	47	14	57/52
JX-NLPG42A-DS	PG42	25-33	54	15	64/62
JX-NLPG42B-DS		31-41	54	15	64/62

More options: Customization of PA66 Nylon Cable Gland is acceptable. Welcome to inquire.

Feature And Application of PA66 Nylon Cable Gland

Our PA66 Nylon Cable Gland provide the highest degrees of functionality and safety. Features as below:

High Quality :

Made from Nylon PA66 can resistant to Salt water, gasoline, alcohol, oil, grease, ester, ketone ether, benzene, common solvent, weak acids & weak alkalis.

IP68 waterproof rating :


Resistant to submersion up to a maximum depth of 1.5m underwater for up to thirty minutes.

Minimum Assembly time :

Cable can be inserted through directly then tighten easily. No need for disassemble.

Multi Purpose Application :

Widely use to cable fixing, wire splices, machinery control boxes, distribution panels, and electrical appliances etc.

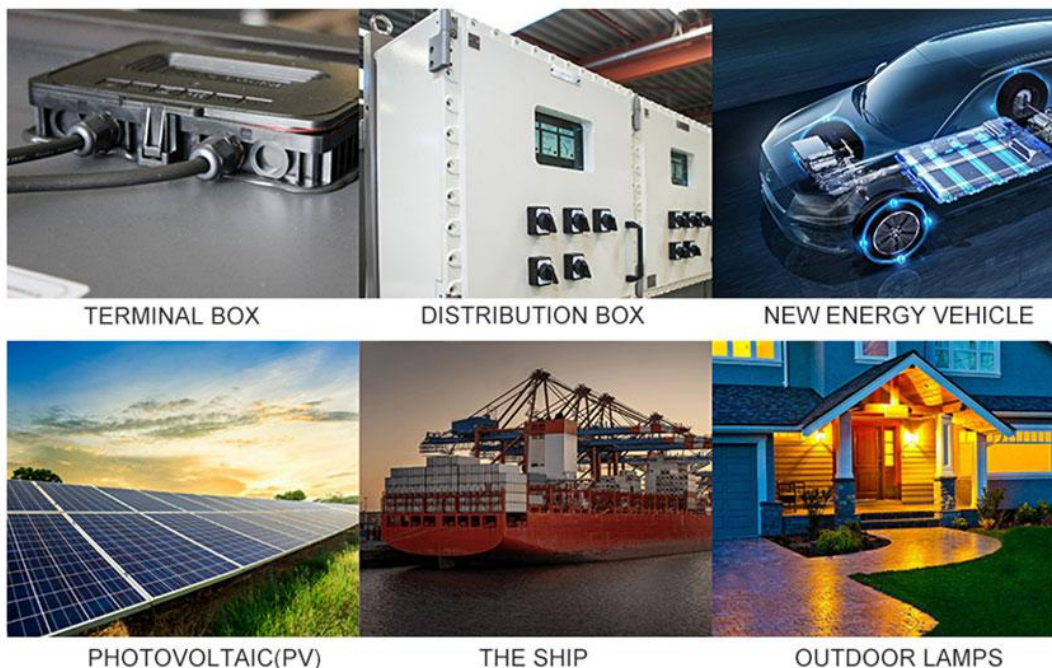

The Details of PA66 Nylon Cable Gland

Thread Specification: PG Thread

Material: The PA66 Nylon Cable Gland dbody parts are made of PA66.

Rubber is EPDM.

Working temperature: -40°C to 100°C in static state, or instantaneous heat resistance up to 120°C; -20°C to 80°C in dynamic state, or instantaneous heat resistance up to 100°C.

Protection level : IP 68-10 bar, waterproof, self-locking.

Colours: Black, White, other color available upon request

PA66 Nylon Cable Gland Qualification

Certificates of JIXIANG CONNECTOR® PA66 Nylon Cable Gland: CE, ROHS, IP68, ISO9001



Deliver, Shipping And Serving

Delivery of PA66 Nylon Cable Gland : Normally 7 working days to 1 month after received the payment.