

Metal Anchor Clamp



Type	Cross-section (mm ²)
PA-06	1.5-16
PA-07	1.5-16
PAM-08	1.5-25
PAL1000	25-70
PAL1500	25-70
PAL2000	70-120
JBG-1	54.6-70

Four-core Tension Clamp




Type	Cross-section (mm ²)	Type	Cross-section (mm ²)
SL157	2 × 16-35	SL161	4 × 16-35
SL158	4 × 16-35	PA4/16-35	2 × 16/4 × 35
SL160	2 × 16-35		



Type	Cross-section (mm ²)	Type	Cross-section (mm ²)
TC50	4 × 16-50	TC150	4 × 120-150
TC95	4 × 50-95	NES-2B	4 × 70-120


Pre-Insulated Sleeve

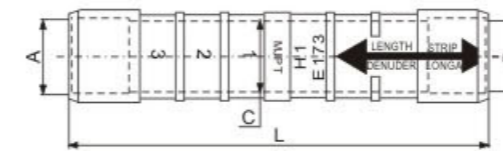

Type	Cable Size (mm ²)		Plastic Sleeve Diameter (mm)	Length (mm)	Color
	A	B	C	L	
MJPT 16/16	16	16	17.3	70	Blue
MJPT 25/25	25	25	17.3	70	Orange
MJPT 35/35	35	35	21	99.5	Red
MJPT 50/50	50	50	21	99.5	Yellow
MJPT 70/70	70	70	21	99.5	White
MJPT 95/95	95	95	23.5	137	Gray

Pre-Insulated Bimetal Sleeve

Material: E-Cu; Al-99.6%
Product property: CPTAU is designed to connect the insulated.

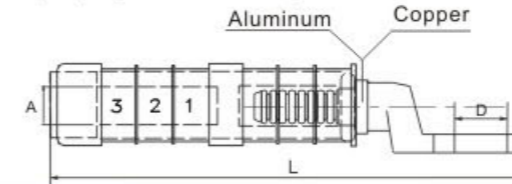

Type	Cable Size (mm ²)		Inner Diameter (mm)	Length (mm)	Color
	A		D	L	
CPTAU16-10	16		10.5	73	Blue
CPTAU25-12	25		13	98.5	Orange
CPTAU35-12	35		13	98.5	Red
CPTAU50-12	50		13	98.5	Yellow
CPTAU54.6-12	54.6		13	98.5	Black
CPTAU70-12	70		13	98.5	White
CPTAU95-12	95		13	98.5	Gray

Expansion Screws



Aluminum Clamp



Others

