

**PVC Insulated Spade Terminals for 22-16AWG**

High quality PVC Insulated Spade Terminals for 22-16AWG is offered by China manufacturers JZY. JZY spade connector selection includes heat shrink, nylon, and vinyl insulation types, along with a variety of non-insulation spade connectors. Heat shrink spade terminals are a durable and secure connection solution. When heated, the insulation fully encloses the connection for a waterproof, corrosion-resistant, and pull strength protection.

Product Description

JZY is China manufacturers & suppliers who mainly produces PVC Insulated Spade Terminals for 22-16AWG with many years of experience. The vinyl-insulated spade connector line is an economical option that provides a surrounding connection protection solution, Such as PVC-Insulated Spade Terminals for 22AWG-16 AWG. Nylon-insulated spade connectors are a flexible, heat-resistant solution. Non-insulated spade terminal options are ideal for standard applications that do not require any special connection performance. High-temperature terminals are designed for extreme environment applications in which other terminals may fail or melt.

The colour of PVC-Insulated Spade Terminals for 22AWG-16 AWG are Blue. colour coding is the most popular type of crimp terminal. Colour coding is used to denote a wire size:

Red 0.5 mm² to 1.5 mm


Yellow 2.5 mm² to 6 mm

Blue 1.5 mm² to 2.5 mm

Other colours are available.

PVC Insulated Spade Terminals for 22-16AWG Parameter (Specification)



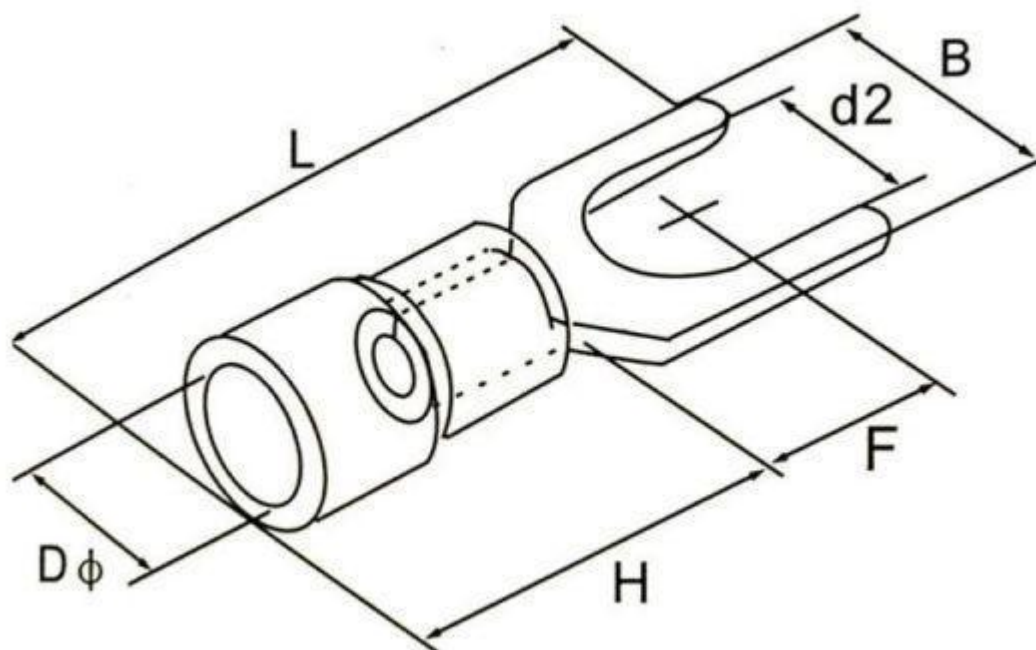

ITEM NO.	Thickness	DIMENSIONS(mm)					PCS /PACK	WIRE SPECIFICATION MAX CURRENT
		Bolt mouth diameter	B	L	DΦ	H		
SV1.25-3	0.8	3.2	5.7	21.2	6.5	10	1000	0.5~1.5mm2 22-16 A.W.G
SV1.25-3.5	0.8	3.7	5.7	21.2			1000	
SV1.25-4	0.8	4.3	6.4	21.2			1000	
SV1.25-5	0.8	5.3	8.1	21.2			1000	
SV1.25-6	0.8	6.5	9.5	21.2			1000	

PVC Insulated Spade Terminals for 22-16AWG Feature And Application

This PVC-Insulated Spade Terminals for 22AWG-16 AWG head and tail joints welded seams tin, the hole system, a thread-line. in order to enhance the tensile strength.

- Max.current=19A
- Wire rating: 0.5~1.5mm

Non-insulated Spade terminals are commonly used in automotive and marine vehicles, but can also be used in other various electrical applications.

Zhejiang Centro Flow Control Co., Ltd.

Tel:+86-15088900618

E-mail:chenchenghe@jzyterminal.com

PVC Insulated Spade Terminals for 22-16AWG Details



Deliver,Shipping And Serving

1. Your inquiry will be replied within 24 hours.
2. We offer you professional service in fluent English.
3. Keep the mass production as the sample in high quality
4. Freight forwarder: faster, safer, and convenient.
5. Quality: we have QC on each process,provide high quality products.

Any problem or needed please feel free let us know, we are glad to service for you
We are factory, we can provide competitive price. And all the products will be shipped after quality inspection. Usually we quote within 24 hours after we get your inquiry.

PACKAGING & SHIPPING





FAQ

Q1: Are you a trading company or factory?

A1:We are factory with more than 20 years experience in this field.

Q2: how about the quality control in your factory?

A2: all products will be 100% inspected before shipment.

Q3: When can I get the price?

A3: Usually we will quote within 24 hours after receiving your inquiry.

Q4: What is the acceptable payment term?

A4: Credit Card, West Union, Paypal or T/T.

Q5: How could I get a sample?

A5: if you can't buy our product in your local area, we can send a sample to you. Sample will be charged by retail price, and plus all related shipping costs. Express delivery charge depends on the quantity of the samples.