

18KV 10kA Polymer Surge Arrester

Model:YH10W-18



M. V. Polymer Surge Arresters are used to protect transformers and other equipments in station and distribution systems against the damage by atmospheric (especially lightning effects) and operational conditions. Metal oxides Surge arresters without gaps are designed to prevent probable damages in the case of typical surges in energy systems while it has no negative effect on energy systems in normal operation voltage. This special feature of gapless arresters originating from non-linear characteristics of metal-oxide varistors

between voltage and current scales. The non-linear feature is much higher compared to silicon carbide Surge arresters.

Product Introduction


Normal service conditions

- 1.The ambient temperature: $-40^{\circ}\text{C} \sim +40^{\circ}\text{C}$
- 2.The altitude above sea level :not exceed 1000-2000m (the altiplano area should be indicated when order)
- 3.Earthquake intensity: not higher than 7 degrees;
- 4.Maximum wind velocity :less than 35m/s.
- 5.The filthy area should be given clear indication.

Product Feature

The zinc oxide lightning arrester is the most advanced over-voltage protector in the world. Due to make the resistor disc of core component mainly adopt zinc oxide arrester. Compared with the conventional silicon carbide arrester, this prescription of the product improves greatly the volt-ampere characteristics of the resistor disc and increase through- current capability at over-voltage so as to bring a radical-changes for the characteristics of the arresters.

- * Rated Voltage(U_r): 3kV – 36kV
- * Nominal Discharge Current(I_n): 5kA or 10kA
- * Long Duration Current Impulse: 150A or 250A
- * High Current Impulse(I_{max}): 65kA or 100kA
- * Pressure relief capability: 16kA or 20kA
- * Creepage distance: $\geq 25\text{mm/kV}$, or $\geq 31\text{mm/kV}$

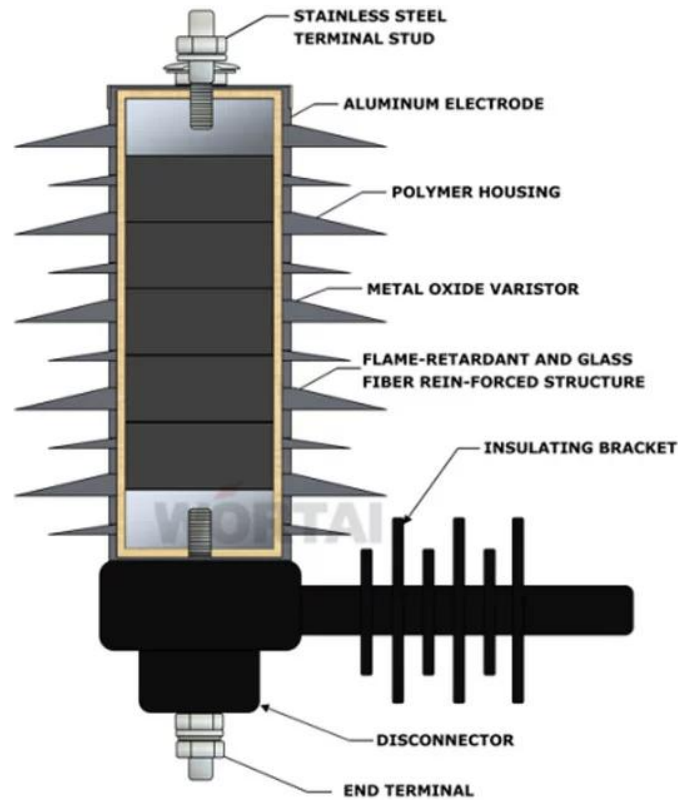

Products Parameter (Specification)

10kA Series

Arrester type	Rated voltage U_r (kV)	Max. continues operating voltage		Residual Voltage (kV)		
		as per IEC	as per ANSI/IEEE	1/10 μ s Steep current impuse	8/20 μ s Lightning current impulse	30/60 μ s Switching current impulse
		U_c (kV)	MCOV (kV)			
Y10W-3/9	3	2.4	2.55	11.3	9	8.9
Y10W-6/18	6	4.8	5.1	20.5	18	16
Y10W-9/27	9	7.2	7.65	31	27	24
Y10W-10.5/30	10.5	8.4	9.3	36.3	31.5	27.6
Y10W-11/33	11	8.8	9.35	38	33	29
Y10W-12/36	12	9.6	10.2	41.5	36	30.6
Y10W-15/45	15	12.0	12.7	52	45	38.3
Y10W-18/54	18	14.4	15.3	62	54	46













Y10W-21/63	21	16.8	17	72.5	63	53.5
Y10W-24/72	24	19.2	19.5	82.5	72	61.2
Y10W-27/81	27	21.6	22	93.2	81	69
Y10W-30/90	30	24.0	24.4	104	90	80
Y10W-33/99	33	26.4	28.0	113.8	99	84.2
Y10W-36/108	36	28.8	29.0	124.2	108	91.8

5kA Series

Arrester type	Rated voltage U_r (kV)	Max. continues operating voltage		Residual Voltage (kV)		
		as per IEC	as per ANSI/IEEE	1/10 μ s Steep current impuse	8/20 μ s Lightning current impulse	30/60 μ s Switching current impulse
		U_c (kV)	MCOV (kV)			
Y5W-3/9	3	2.4	2.55	11.3	9	8.9
Y5W-6/18	6	4.8	5.1	20.5	18	16
Y5W-9/27	9	7.2	7.65	31	27	24
Y5W-10/30	10	8.0	9.3	34.1	30	26.6
Y5W-11/33	11	8.8	9.35	38	33	29
Y5W-12/36	12	9.6	10.2	41.5	36	30.6
Y5W-15/45	15	12.0	12.7	52	45	38.3
Y5W-18/54	18	14.4	15.3	62	54	46
Y5W-21/63	21	16.8	17	72.5	63	53.5
Y5W-24/72	24	19.2	19.5	82.5	72	61.2
Y5W-27/81	27	21.6	22	93.2	81	69
Y5W-30/90	30	24.0	24.4	104	90	80
Y5W-33/99	33	26.4	28.0	113.8	99	84.2
Y5W-36/108	36	28.8	29.0	124.2	108	91.8

More Products



			
Power Line Hardware	Frame and Cross Arm	Cable Wire Terminals	Preformed Line Product
			
Aerial Electrical Fittings	Isolate Switch	Surge Arresters	Fuse Cutouts
			
Polymer Insulators	Insulator Fittings	Porcelain or Glass Insulator	Electric Power Tool

 <p>Surge Arrester</p> <p>SHOP NOW ▶</p>	 <p>Surge Arrester</p> <p>SHOP NOW ▶</p>	 <p>Surge Arrester</p> <p>SHOP NOW ▶</p>	 <p>Surge Arrester</p> <p>SHOP NOW ▶</p>
 <p>Fuse Cutout</p> <p>SHOP NOW ▶</p>	 <p>Fuse Cutout</p> <p>SHOP NOW ▶</p>	 <p>Polymer Insulator</p> <p>SHOP NOW ▶</p>	 <p>Polymer Insulator</p> <p>SHOP NOW ▶</p>