



Low Voltage 1 2 3 4 5 Core Copper SWA STA Electric Power Cable

Longda cable Company is a professional Low Voltage 1 2 3 4 5 Core Copper SWA STA Electric Power Cable manufacturer with 15 years production experience. We specialize in supplying 300V/500V solid/stranded general PVC cable, coaxial cable, security cable, telephone cable, speaker cable, networking cable, H05RN-F/H07RN-F flexible rubber cable, YH/YHF welding cable, submersible pump cable, aluminium conductor cable, copper/aluminium

high-middle-low voltage PVC/XLPE cable and other products.

XLPE cables are designed for distribution of electrical power with nominal voltage 290/500kV. They are suitable for installation mostly in power supply stations, indoors and in cable ducts, outdoors, underground and in water as well as for installation on cable trays for industries, switchboards and power stations. Longda Cable company is Low Voltage 1 2 3 4 5 Core Copper SWA STA Electric Power Cable manufacture from China , we can Provide free samples, high quality, competitive prices, Chinese factories, welcome to visit us.



Quick Details

Model Number: Power cable, YJV/YJLV

Insulation Material: XLPE OR PVC

Type: LOW VOLTAGE

Application: Underground

Conductor Material: Aluminium or Copper

Jacket: PVC or PE

Product name: Low voltage xlpe aluminium armoured cable steel tape armoured cable

core material: Aluminium or Copper

core number: 1 core, 2 core, 3 core, 4 core, 5 core, Customized

Standard: GB12706, GB12666

Provider: factory

Packing: Roll

Size: Customized Size

Rated Temperature: -40C ~ +80C

Packaging & Delivery

Yanggu Longda Cable Co. LTD

Tel: +86-17706357277

E-mail: admin@sdlldcable.com

Packaging Details

1. Packing Lengths: 100m/roll, 200m/roll, 300m/roll, 100yard/roll according to customer's requirement.
2. Inner Packing: carton box, pull out box, pallet available
3. Outer Packing: carton box, pull out box, pallet available

Port

Qingdao, Shanghai, Tianjin, Guangzhou, Ningbo



Model:	Insulated copper/aluminum core power cable
Conductor	Aluminum or Copper
Armoured	SWA(Steel Wire Armoured) / STA(Steel Tape Armoured) or Non-Armoured
Insulation	PVC/LSF/Fire Resistant
Cores	1, 2, 3, 4, 5, 3+1, 4+1, 3+2, 聽 Customized



LONGDA CABLE

www.sdlcable.com

Section Area	1.5mm ² -300mm ²
Standard	IEC 60502, BS 7870, GB/T12706 or other.
Packaging	Iron Or Wooden Drum
Application	Building, Engineered, Railway, Plant construction, Shool, Hospital, Underground and so on.
Market	South&north America/Europe/ Asia/ Australia/Africa and etc.
Trade Term:	FOB/CIF/CFR/CNF/EXW/DDU/DDP
Our advantage	One-stop shopping; High quality; Competitive price; Timely delivery; Technical support;
Customized	OEM/ ODM



Type		Name	Application
Cu Conductor	Al Conductor		

Yanggu Longda Cable Co. LTD
 Tel:+86-17706357277

E-mail:admin@sdlcable.com



YJV YJY	YJLV YJLY	XLPE Insulated,PVC or PE Sheathed Power Cable	For laying in door, tunnel, channel and underground. Unable to bear external mechanical force, but bear the traction force during laid.
YJV22 YJY23	YJLV22 YJLV23	XLPE Insulated, Steel Tape Armoured, PVC or PE Sheathed Power Cable	For laying in tunnels in door, tunnel, channel and underground. Able to bear external mechanical force, but unable to bear large pulling force.
YJV32 YJY33	YJLV32 YJLY33	XLPE Insulated, Fine Steel Wire Armoured, PVC or PE Sheathed Power Cable	For laying in shaft with large difference of level. Able to bear external mechanical force, and moderate pulling force.
YJV42 YJY43	YJLV42 YJLY43	XLPE Insulate, Thick Steel Wire Armoured, PVC or PE Sheathed Power Cable	Able to bear positive pressure and pulling force.

NO. of cores section (mm)	insulation thickness (mm)	thickness of oversheath (mm)		Approximate overall diameter of cable (mm)		Approximate weight of cable (kg/km)			
		Unarmoured	Armoured	Unarmoured	Armoured	Cu		AL	
						YJV	YJV22	YJLV	YJLV22
4 股 4	0.7	1.8	1.8	12.5	18.1	282	430		
4 股 6	0.7	1.8	1.8	14.7	17	383	545		
4 股 10	0.7	1.8	1.8	16.9	19.1	565	752		517
4 股 16	0.7	1.8	1.8	19.3	21.6	783	1020	390	663
4 股 25	0.9	1.8	1.8	23.5	25.7	1241	1502	416	902
4 股 35	0.9	1.8	1.8	26.7	28.7	1631	1957	593	1096
4 股 50	1.0	1.8	1.9	28.0	32.6	2080	2812	776	1770
4 股 70	1.1	2.0	2.1	33.2	37.5	2952	3796	961	2223
4 股 95	1.1	2.1	2.3	38.0	42.6	3970	4962	1302	2757
4 股 120	1.2	2.3	2.4	40.9	46.4	4894	5913	1693	3363
4 股 150	1.4	2.4	2.6	46.0	51.3	5980	7170	2077	3878
4 股 185	1.6	2.6	2.7	52.5	57.8	7422	8802	2852	4618
4 股 240	1.7	2.8	3.0	59.4	64.6	9764	11289	3173	5782
4 股 300	1.8	3.0	3.1	66.2	71.6	12122	13856	4032	6735
4 股 400	2.0	3.3	3.4	73.8	80.3	15624	18407	4924	9313

Uo/Um (kv)	0.6/1	1.8/3	3.6/6	6/10	8.7/15	12/20	18/30	21/35
area (mm ²)								
1 Core	15-800	25-800	25-800	25-800	35-800	50-800	50-800	50-800
2 Core	15-185	/	/	/	/	/	/	/
3 Core	15-400	25-400	25-400	25-400	35-400	50-400	50-400	50-400




LONGDA CABLE

www.sdlcable.com

4 Core	25-400	25-400	25-400	/	/	/	/	/
5 Core	25-400	25-400	25-400	/	/	/	/	/

Structure

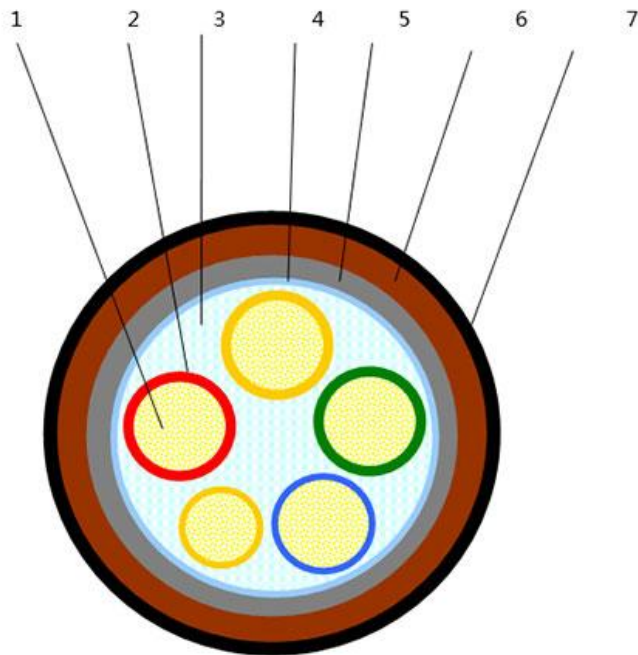

Legend:

- 1— Oxygen-free pure copper (or aluminum) compact conductor
- 2— cross-linked polyethylene insulating layer
- 3— Polypropylene mesh belt filling
- 4— Cable wrapping non-woven fabric
- 5— PVC inner sheath
- 6— painted steel tape armor
- 7— 90°C PVC sheath



Oxygen-free copper conductor

High quality oxygen-free copper conductor

Low resistivity

Highly efficient conductivity



High quality PVC plastic

Polyvinyl chloride

Abrasion resistant

High pliability



FAQ

How can I get the price?

"-We usually quote within 24 hours after we get your inquiry (Except weekend and holidays), -If you are very urgent to get the price, please tell us or tell us in the email, or contact us in other ways so that we can offer you a quote, "

Can I buy samples before placing orders?

"-Yes, after price confirmation, you can require for samples to check our quality, Sample is free, but the freight charge should be paid, "

How long can I expect to get the sample?

"-After you pay the freight charge and send us confirmed files, the samples will be ready for delivery in 3-7 days, The samples will be sent to you via express and arrive in 3~5 days, "

What is your lead time?

Yanggu Longda Cable Co. LTD

Tel:+86-17706357277

E-mail:admin@sdlcable.com

"-It depends on the order quantity and the season you place the order, -Usually we can ship within 7-15 days for small quantity, and about 30 days for large quantity, Generally speaking, we suggest that you start inquiry two months before the date you would like to get the products at your country, the freight might take over a month, "

What is your payment term?

-L/C, T/T, Western Union, Credit Card, MoneyGram & Paypal

What is the shipping method?

"-It could be shipped by sea,by air or by express(EMS,UPS,DHL,TNT,FEDEX and ect), Please confirm with us before placing orders, "

What kinds of products does Line Giant Cable manufacture?

"-Oxygen free pure copper conductor -power cables, -Metal clad cable -railway locomotive cables, -Building Wire, housing wire -solar photovoltaic cables, -aerospace wire, -Industrial Cable -silicon cable, rubber wire, aluminum cable, PVC Insulated Wire -Telecom Cable -Transit Cable -Mining cable, -Control Cable; -Low and Medium Power Cable"

What are LineGiant advantages are?

"--ISO9001 , ISO14001 , OHSMS18001 --Over 100 patent certificate and more --National High-Tech Enterprise -- TUV, IEC, CQC, CTC, CCC --Industrial Production Permission --Trustworthy Enterprises --Markets Recognised Famous products --Standard Qualified Company"

How do you make our business long-term and good relationship?

"-1, We keep good quality and competitive price to ensure our customers benefit ; -2, We respect every customer as our friend and we sincerely do business and make friends with them,no matter where they come from, "