




15.0×7.5×9.4

c  us E158859

## Features

- DIL pitch terminals .
- Conforms to FCC Part 68 2.5kV surge and dielectric 1500VAC.
- High contact capacity 2A/30VDC.
- Application for telecommunication equipment, office equipment, security alarm systems, measuring instruments, medical monitoring equipment , audio visual equipment, flight simulator, sensor control.

## Ordering Information

**NX** 2 12 W  
 1 2 3 4

1 Part number: NX  
 2 Contact arrangement: 2:2C

3 Coil rated Voltage(V): DC:3,4.5,5,6,9,12,24  
 4 Contact Material: NIL:AgPd W:AgNi

## Contact Data

|                            |                                     |                                                   |                          |
|----------------------------|-------------------------------------|---------------------------------------------------|--------------------------|
| Contact Arrangement        | 2C(DPDT(B-M)) (Bifurcated Crossbar) |                                                   |                          |
| Contact Material           | AgPd( Au plated) AgNi(Au plated)    |                                                   |                          |
| Contact Rating (Resistive) | 2A/30VDC; 0.5A/125VAC               |                                                   |                          |
| Max. Switching Power       | 60W 62.5VA                          | Min. Switching Load: 0.01mA/10mV(Reference Value) |                          |
| Max. Switching Voltage     | 220VDC, 250VAC                      | Max. Switching Current:2A                         |                          |
| Contact Resistance         | ≤70mΩ Item 4.12 of IEC 61810-7      |                                                   |                          |
| Operational Life           | Electrical                          | 1×10 <sup>5</sup>                                 | Item 4.30 of IEC 61810-7 |
|                            | Mechanical                          | 1×10 <sup>8</sup>                                 | Item 4.31 of IEC 61810-7 |

### CAUTION:

Relays previously tested or used above 10mA resistive at 6V maximum (DC or peak AC) open circuit are not recommended for subsequent use in low level applications.

## Coil Parameter

| Dash numbers | Coil voltage VDC |      | Coil resistance Ω ±10% | Pick-up voltage VDC(max) (75%of rated voltage ) | Drop-out voltage VDC(min) (10% of rated voltage) | Coil power W | Operate time ms | Release time ms |
|--------------|------------------|------|------------------------|-------------------------------------------------|--------------------------------------------------|--------------|-----------------|-----------------|
|              | Rated            | Max. |                        |                                                 |                                                  |              |                 |                 |
| NX2-003      | 3                | 4.5  | 64.3                   | 2.25                                            | 0.3                                              | 0.14         | ≤4              | ≤4              |
| NX2-004      | 4.5              | 6.7  | 145                    | 3.38                                            | 0.45                                             | 0.14         |                 |                 |
| NX2-005      | 5                | 7.5  | 178                    | 3.75                                            | 0.5                                              | 0.14         |                 |                 |
| NX2-006      | 6                | 9.0  | 257                    | 4.50                                            | 0.6                                              | 0.14         |                 |                 |
| NX2-009      | 9                | 13.5 | 579                    | 6.75                                            | 0.9                                              | 0.14         |                 |                 |
| NX2-012      | 12               | 18.0 | 1028                   | 9.00                                            | 1.2                                              | 0.14         |                 |                 |
| NX2-024      | 24               | 36.0 | 2880                   | 18.0                                            | 2.4                                              | 0.20         |                 |                 |

### CAUTION:

- 1.The use of any coil voltage less than the rated coil voltage will compromise the operation of the relay.
- 2.Pickup and release voltage are for test purposes only and are not to be used as design criteria.
- 3.Unless otherwise stated, the rated coil voltage specified in coil parameter and its suitable polarity(if applicable) shall be used for all tests and its application to the relay.

**Characteristics**


|                                                                           |                                                                              |                          |
|---------------------------------------------------------------------------|------------------------------------------------------------------------------|--------------------------|
| Insulation Resistance                                                     | 1000M $\Omega$ min (at 500VDC)                                               | Item 4.11 of IEC 61810-7 |
| Dielectric Strength                                                       |                                                                              |                          |
| Between Open Contacts<br>Between Coil & Contacts<br>Between Contact Poles | 1000VAC 1min<br>1500VAC 1min<br>1000VAC 1min                                 | Item 4.9 of IEC 61810-7  |
| Surge Withstand Voltage                                                   |                                                                              |                          |
| Between Open Contacts<br>Between Coil & Contacts                          | 1500V<br>2500V                                                               | FCC 68                   |
| Shock Resistance                                                          | Functional:735m/s <sup>2</sup> 11ms;<br>Destructive:980 m/s <sup>2</sup> 6ms | Item 4.26 of IEC 61810-7 |
| Vibration Resistance                                                      | 10Hz~55Hz Double amplitude<br>Functional:3.3mm Destructive:5mm               | Item 4.28 of IEC 61810-7 |
| Terminals Strength                                                        | 5N                                                                           | Item 4.24 of IEC 61810-7 |
| Temperature Range                                                         | -40 $^{\circ}$ C~85 $^{\circ}$ C(-40 $^{\circ}$ F~185 $^{\circ}$ F)          |                          |
| Relative Humidity                                                         | 5% to 85%                                                                    | Item 4.16 of IEC 61810-7 |
| Mass                                                                      | Approx. 2g                                                                   | Item 4.7 of IEC 61810-7  |

**Safety Approvals**

|                 |                       |
|-----------------|-----------------------|
| Safety approval | UL&CUR                |
| Load            | 0.5A/125VAC; 2A/30VDC |


**Dimensions**

mm

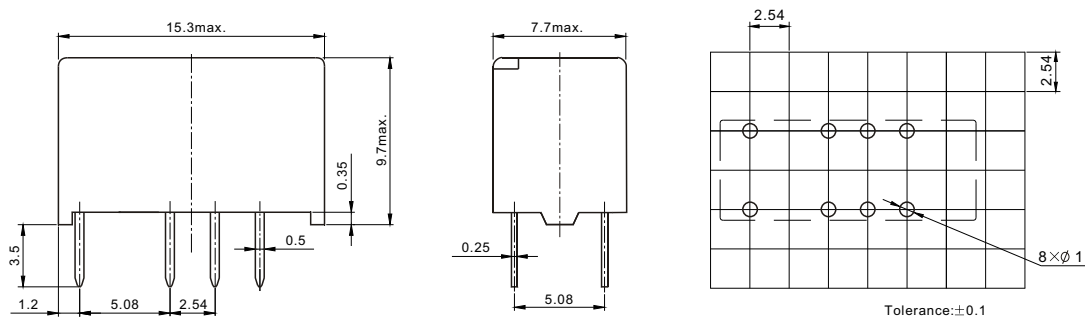

Dimensions

Mounting (Bottom view)



Wiring diagram(Bottom view)

**CAUTION:** In case of no tolerance shown in outline dimension: outline dimension  $\leq 1$ mm, tolerance should be  $\pm 0.2$ mm; outline dimension  $> 1$ mm and  $\leq 5$ mm, tolerance should be  $\pm 0.3$ mm; outline dimension  $> 5$ mm, tolerance should be  $\pm 0.4$ mm.