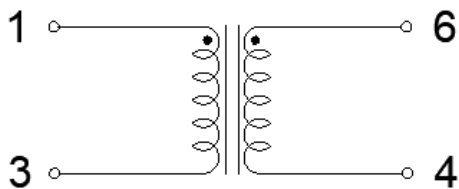
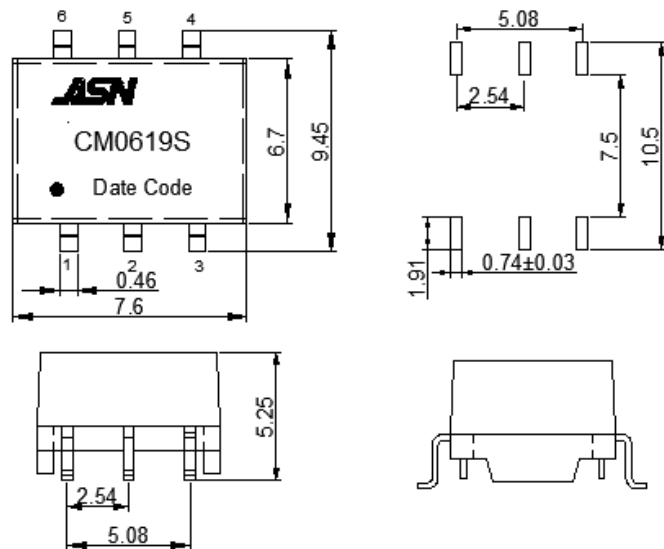


Feature

- Comply with RoHS requirements.
- Operating temperature range: -40°C to +85°C.
- Storage temperature range: -40°C to +105°C.

Electrical Specifications @ 25°C

OCL:	100uH Min. @100KHz/0.02V
Hi-Pot :	1500Vrms/ 0.5mA /2Sec
Turns Ratio:	1CT:1CT±3%
LK:	0.11uH Max @100KHz/0.02V
CWW:	10pF Max @100KHz/0.02V

Schematic

Mechanical


Unless otherwise specified, all tolerances are ±0.25mm