

Feature






- Comply with RoHS requirements.
- Operating temperature range: -40°C to +85°C.
- Storage temperature range: -40°C to +105°C.
- Pri ET Constant: 11Vus Min.

Electrical Specifications @ 25°C

OCL:	(1-3)= 710-1350uH. @100KHz/0.1V
Hi-Pot :	2000VAC 0.5mA 2Sec
Turns Ratio:	3CT:8CT±3%
LK:	(1-3) short (4.6) =0.4uH Typ @100KHz/0.1V
DCR:	Pri : 0.8ohm Max

Schematic

Mechanical

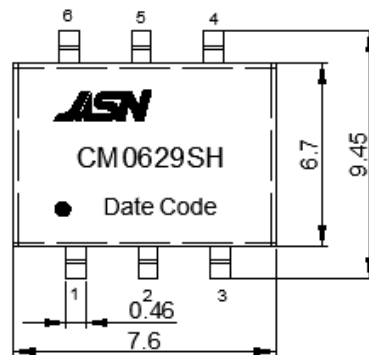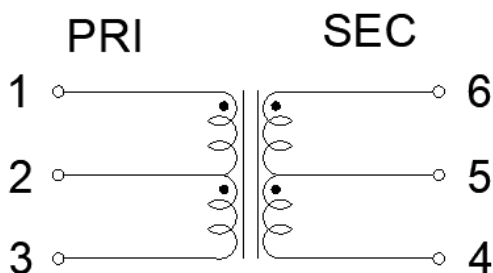

Unless otherwise specified, all tolerances are ±0.25mm