

Feature






- Comply with RoHS requirements.
- Operating temperature range: 0°C to +70°C.
- Storage temperature range: -25°C to +105°C.

Electrical Specifications @ 25°C

OCL:	Pri: 130uH Min. @100KHz/0.1V
Hi-Pot :	2000VaC 0.5mA 2Sec
Turns Ratio:	1CT:1CT±3%
LK:	Pri: 0.3uH Max @100KHz/0.1V
DCR:	Pri : 0.5ohm Max
CWW:	12pF Max

Schematic

Mechanical

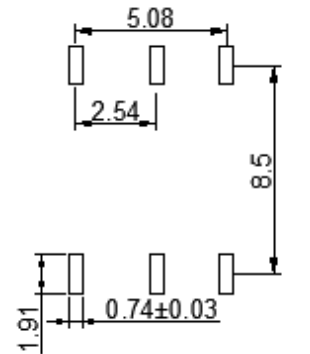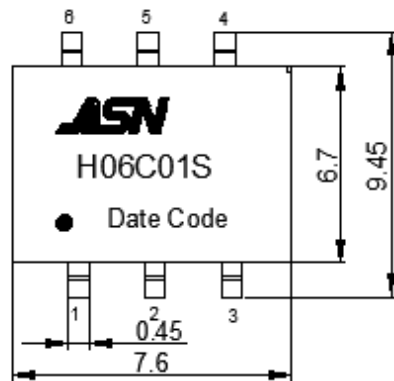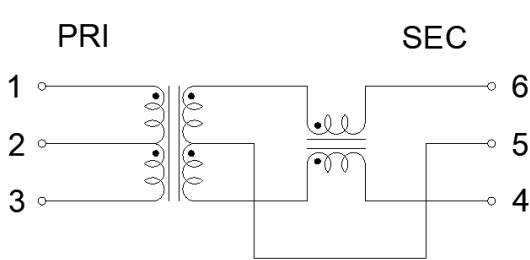

Unless otherwise specified, all tolerances are ±0.25mm