


### Feature

- Comply with RoHS requirements.
- Operating temperature range:-25°C to +125°C.
- Storage temperature range: -25°C to +125°C.

### Electrical Specifications @ 25°C

OCL:	10mH Min. @1KHz/0.25V.
Turn Ratio:	1:1±3%
D.C.R:	120mΩ Max
Hi-POT :	1500VAC 1mA 2S
Insulation resistance:	100 MΩ Min DC 500V

### Schematic

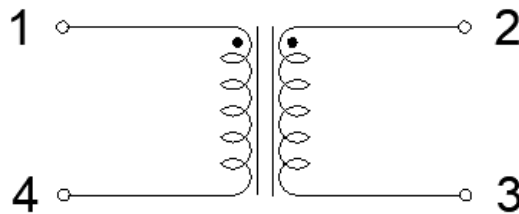

### Mechanical

Unit mm

