

**Released**

# X-band Circulator

## Model No. NJC3901B

**Copyright©****Nisshinbo Micro Devices Inc.  
Microwave Business Headquarters**

-Notice of Proprietary Information-

This document and its contents are proprietary to Nisshinbo Micro Devices Inc.  
This publication and its contents may not be reproduced or distributed for any other purpose  
without the written permission of Nisshinbo Micro Devices Inc.  
Those specifications listed in this document are subject to change at any time.

## ■ GENERAL DESCRIPTION

NJC3901B is a waveguide type circulator, designed for X-band Marine Radar.



## ■ ABSOLUTE MAXIMUM RATINGS

PARAMETERS	MINIMUM	MAXIMUM	UNITS
Frequency range	9.3	9.5	GHz
Peak power	-	30	kW
Average power	-	30	W
Storage temperature	-40	+100	°C
Operating temperature	-30	+70	°C
Pulse width	-	1.0	μs
Duty	-	0.001	-


## ■ ELECTRICAL CHARACTERISTICS

PARAMETERS	TEST CONDITIONS	CODE	LIMIT		
			MINIMUM	MAXIMUM	UNITS
High power input	port①→② f=9.4GHz; Po=30kW; tp=1.0μs; fp=1000pps;	-	-	30	kW
V.S.W.R.	port①	σ	-	1.2	-
	port②		-	1.2	-
	port③		-	1.2	-
Insertion loss	port①→②	Li	-	0.5	dB
	port②→③		-	0.5	dB
	port③→①		-	0.5	dB
Isolation	port②→①	-	25	-	dB
	port③→②		25	-	dB
	port①→③		25	-	dB

Note: V.S.W.R., Insertion loss, and Isolation are measured under the conditions, frequency 8.8 to 10.8GHz input signal 0.1mW.

\* Above Specifications are subject to change without notice.

## ■ OUTLINE

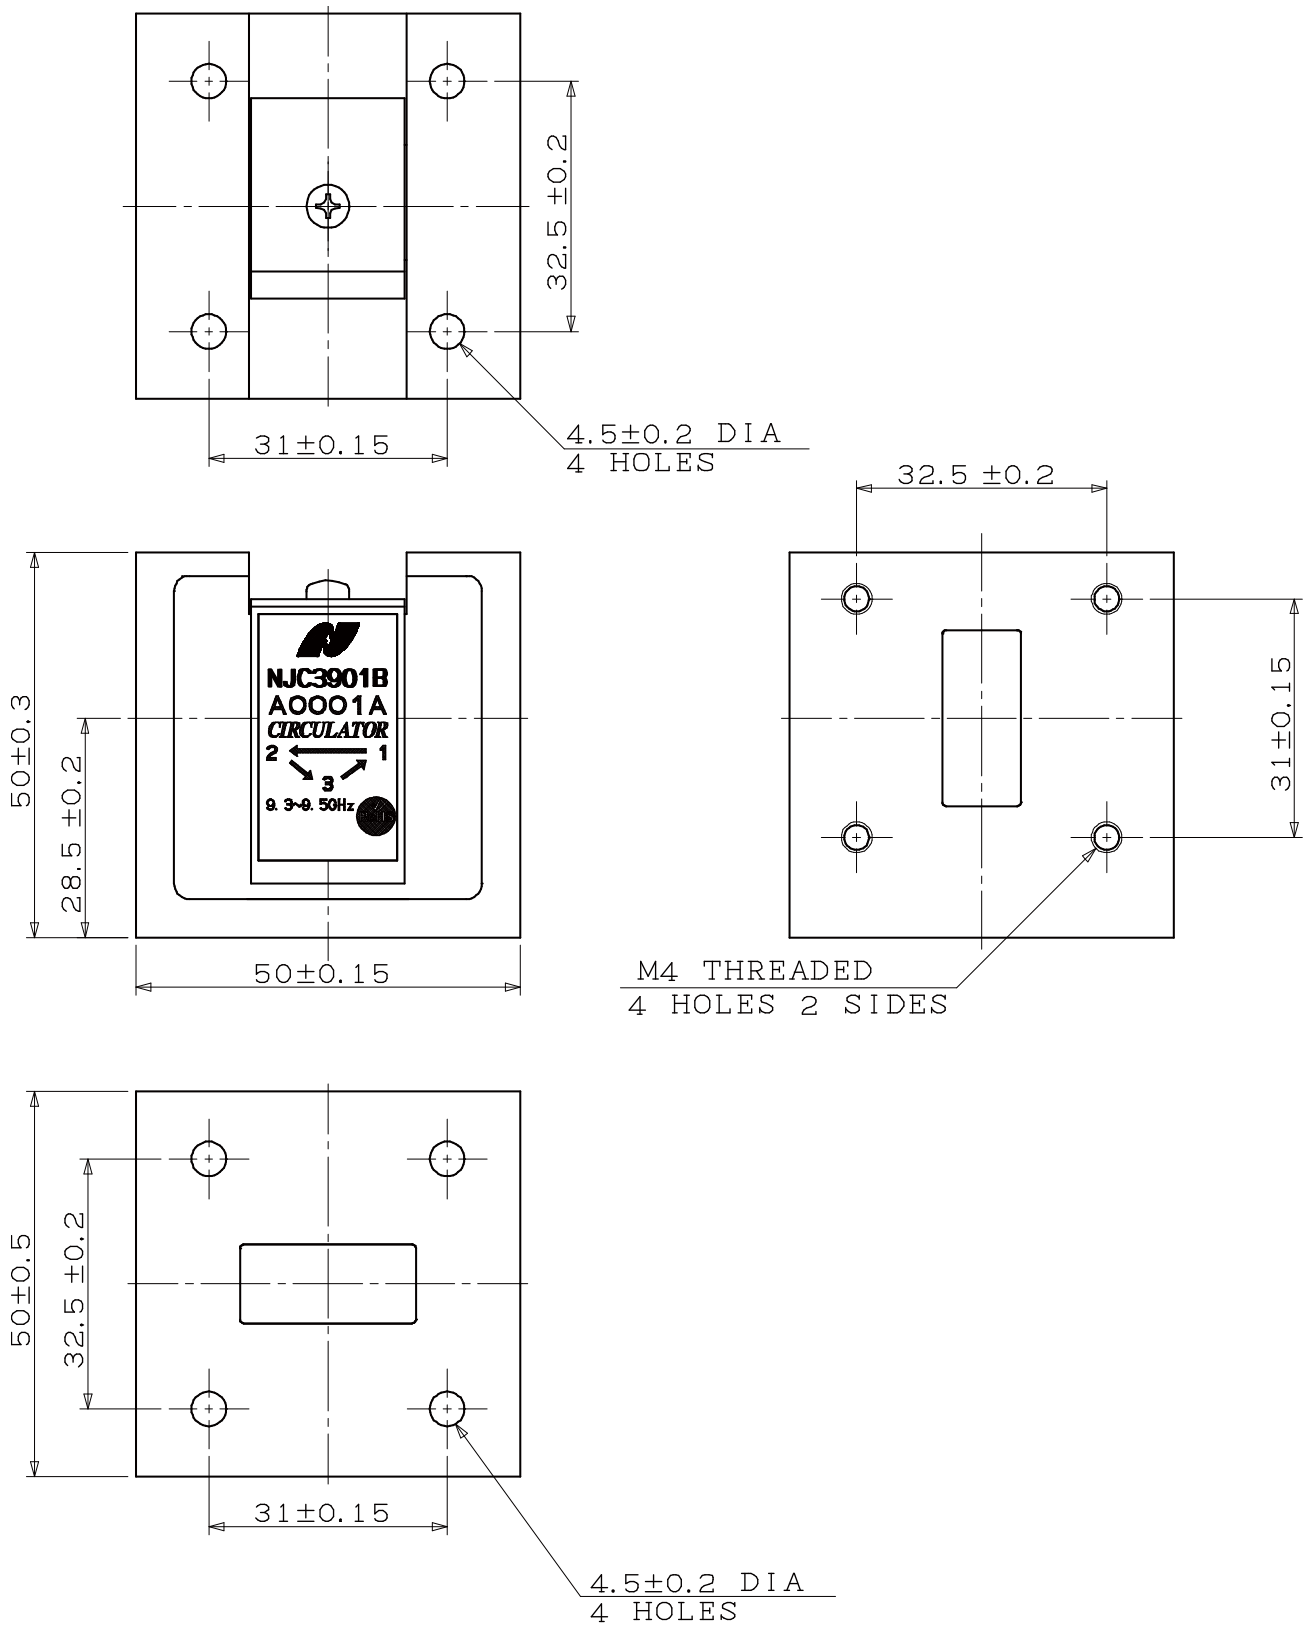

(Dimensions are expressed in "mm".)

\* Above Specifications are subject to change without notice.

