

BEIJING HUADE HYDRAULIC INDUSTRIAL GROUP CO.,LTD.	Directional control valves mechanical operation Type 4WMU/R			RE 22275/12.2004
	Size 6 , 10	up to 31.5 MPa	up to 120L/min	Replaces; RE 22275/05.2001

Features:

- Direct operated directional spool valve with adjustable roller operation
- Roller lever assembly may be stepped in 90°
- Radial forces absorb reliably (up to 30°)
- 19 kinds standard spool function





Funtion,section

Directional valves type WMR are roller operated directional valves.

They basically consist of the housing (1), the roller lever (2), the control spool (3) and the return spring (4).



A plug-in throttle is required if flow greater than the permitted value may occur while the valve spool is being from one position to another. The plug-in orifice is fitted in the P port of the directional valve.

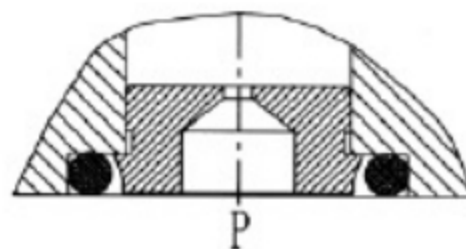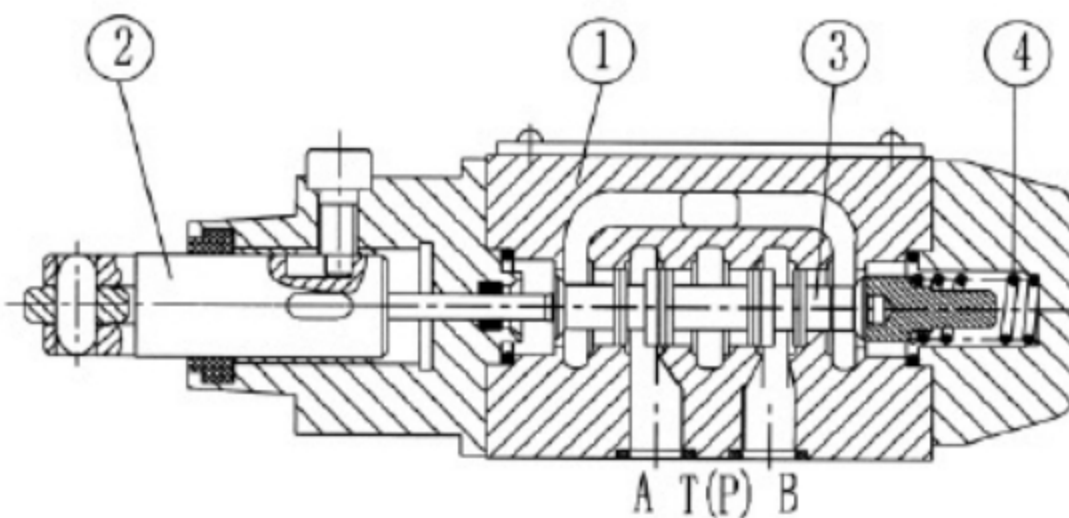
Type 4WMR6



Cartridge throttle

Ordering details

	WM					B	/		*
Further details in clear text									
No code = mineral oils V = phosphate ester									
No code = Without throttle insert B08 = Throttle Φ 0.8 mm B10 = Throttle Φ 1.0 mm B12 = Throttle Φ 1.2 mm									
B = The technology of Beijing Huade Hydraulic									
3 service ports = 3 4 service ports = 4									
 = U  = R									
Size 6 = 6 Size 10 = 10									
50 = Series 50 to 59 (50 to 59: unchanged installation and connection dimensions) (for size 6)									
30 = Series 30 to 39 (30 to 39: unchanged installation and connection dimensions) * (for size10)									

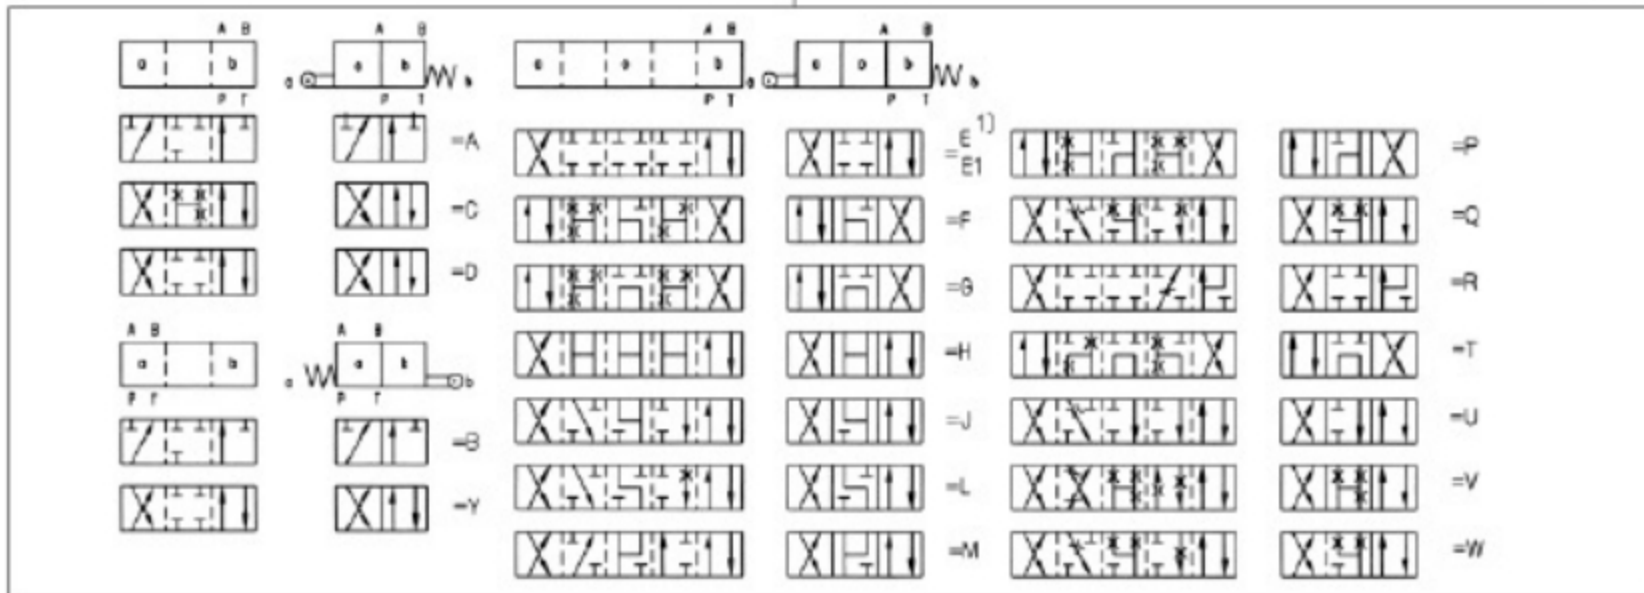

1) Symbol E1:P to A and B with pre-opening


Warning: please consider pressure intensification with single rod cylinders

Technical data

Size	6		10	
Operating ports A, B, P (MPa)	up to 31.5			
Pressure port T (MPa)	up to 6		up to 16	
In symbols A and B, the T port must be used as a drain connection if the operating pressure is above the pressure permitted at the T port				
Max. flow (L/min)	up to 60		up to 120	
Flow cross section (control position 0)	for symbol Q, 6% of nominal cross section for symbol W, 3% of nominal cross section			
Pressure fluid	Mineral oils (for NBR seal) or phosphate ester (for FPM seal)			
Pressure fluid temperature range (°C)	- 30 to + 80			
Viscosity range (mm ² /s)	2.8 to 500			
Weight (kg)	approx. 1.4		approx. 3.3	
Operating force at roller lever (N)	at zero tank pressure	100 to 121	two positions valve	70 to 140
	at a pressure	184 to 205	three positions valve	70 to 175

Characteristic curves (measured at $v = 41 \text{ mm}^2/\text{s}$ and $t = 50 \text{ }^\circ\text{C}$)

WM_U^R6

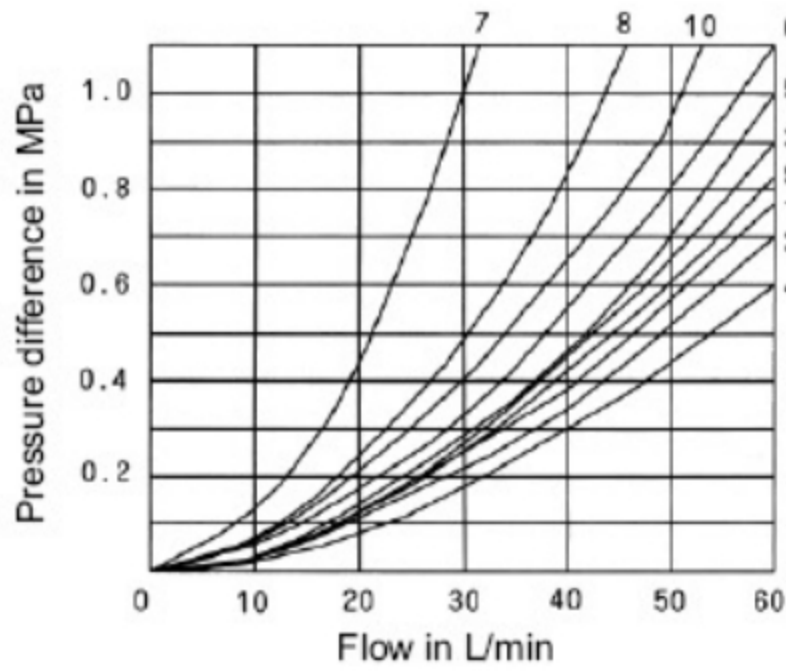


Symbols	Direction of flow			
	P → A	P → B	A → T	B → T
A	3	3	-	-
B	3	3	-	-
C	1	1	3	1
D	5	5	3	3
E	3	3	1	1
F	1	3	1	1
G	6	6	9	9
H	2	4	2	2
J	1	1	2	1
L	3	3	4	9
M	2	4	3	3
P	3	1	1	1
Q	1	1	2	1
R	5	5	4	-
T	10	10	9	9
U	3	3	9	4
V	1	2	1	1
W	1	1	2	2
Y	5	5	2	3

7. Symbol "R" with position A-B

8. Symbols "G" and "T" with mid position P-T

WM_U^R10

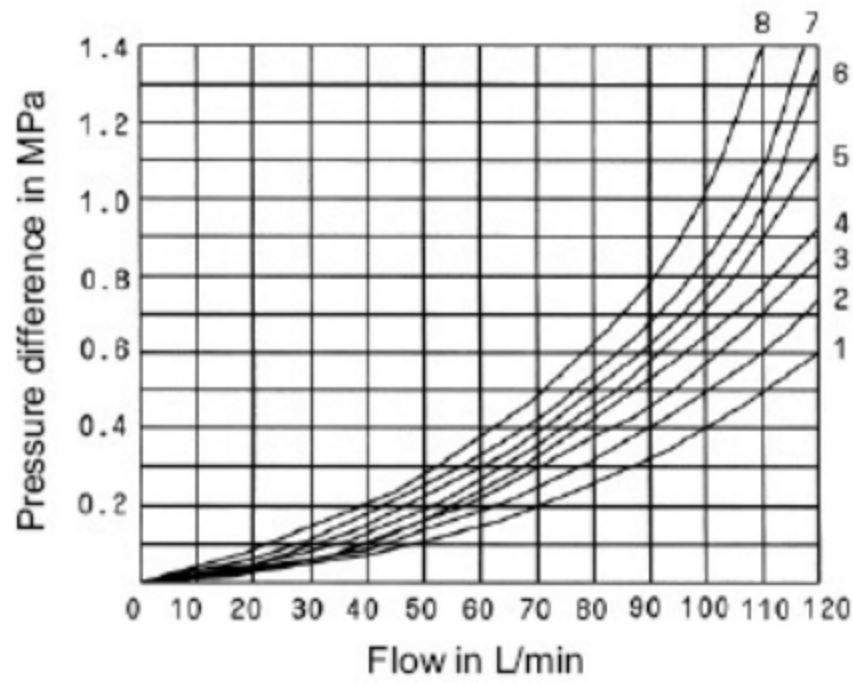

Symbols	Direction of flow			
	P → A	P → B	A → T	B → T
A	4	3	-	-
B	3	4	-	-
C	3	3	4	4
D	3	3	5	5
Y	4	4	6	6
E	2	2	4	4
F	1	2	3	4
G, T	4	4	7	7
H	1	1	5	5
J	2	2	3	3
L	3	3	2	4
M	1	1	4	4
P	3	1	5	5
Q	2	2	2	2
R	3	4	3	-
U	3	3	5	2
V	2	2	3	3
W	3	3	3	3

7. Symbol "R" with position A-B




8. Symbols "G" and "T" with mid position P-T

Performance limits (measured at $v=41\text{mm}^2/\text{s}$ and $t=50\text{ }^\circ\text{C}$)

The operation of the valve is dependent upon the effect of filtration. In order to achieve the given permissible flow rates, full flow filtration $20\mu\text{m}$ is required. The flow forces operating within the valve influence the valve performance. For 4 way valves, the flows given are valid for normal operation with 2 directions of flow (e.g. from P to A and from B to T) If only one flow path is operative e.g. if port A or B is blocked and the valve is used as a 3 way valve, the permissible flows can be very much lower.


WM^R_U 6

Curve	symbol
1	A, B
2	C, D, Y, E, E1, H, M, Q, U, W
3	F, P
4	G
5	J, L
6	R
7	T
8	V

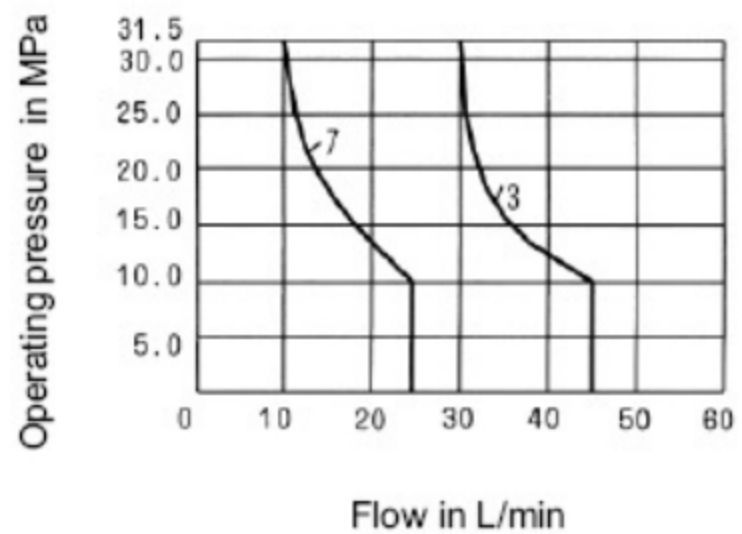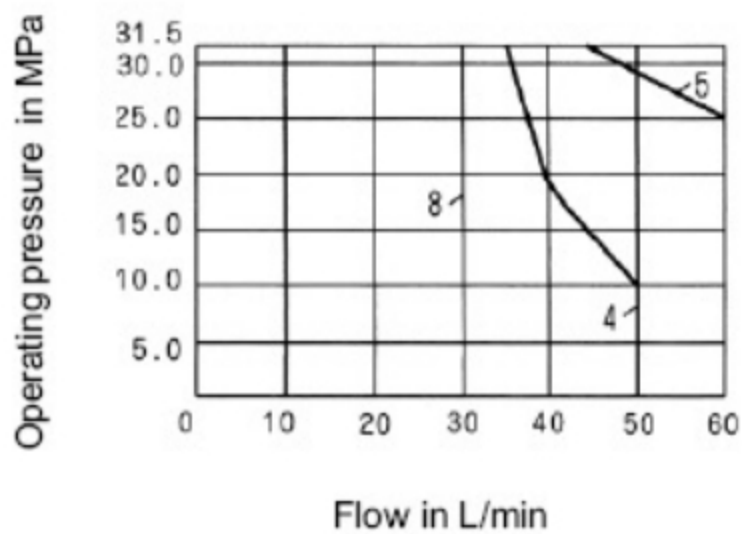
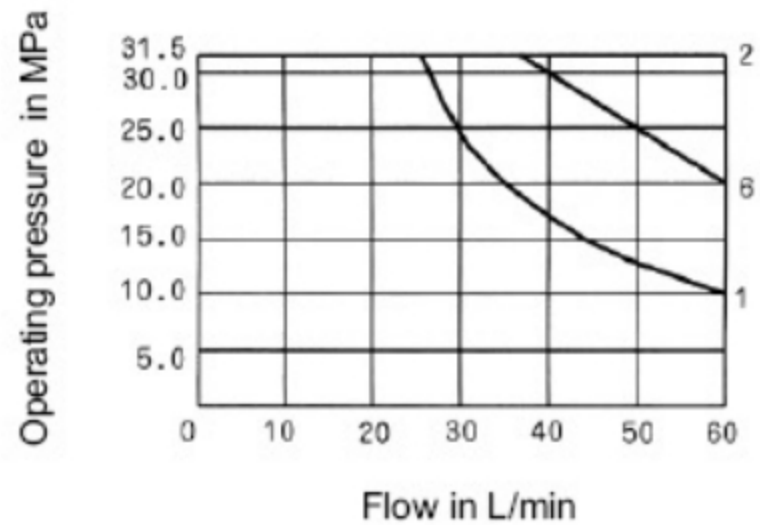


WM^R_U 10



Curve	Symbol
1	A, B
2	H
3	F, G, P, R, T
4	J, L, Q, U, W
5	C, D, E, M, V, Y

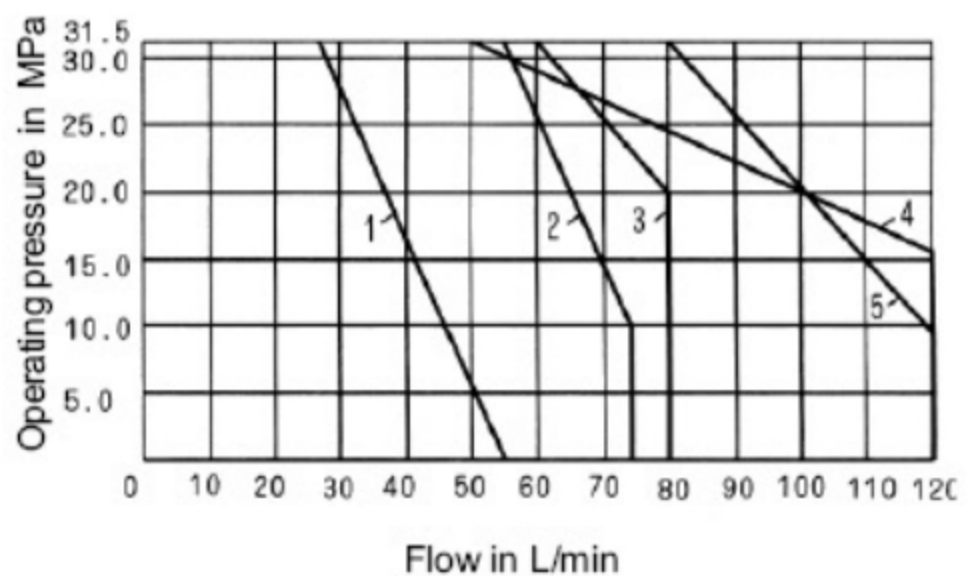

WM_U^R6

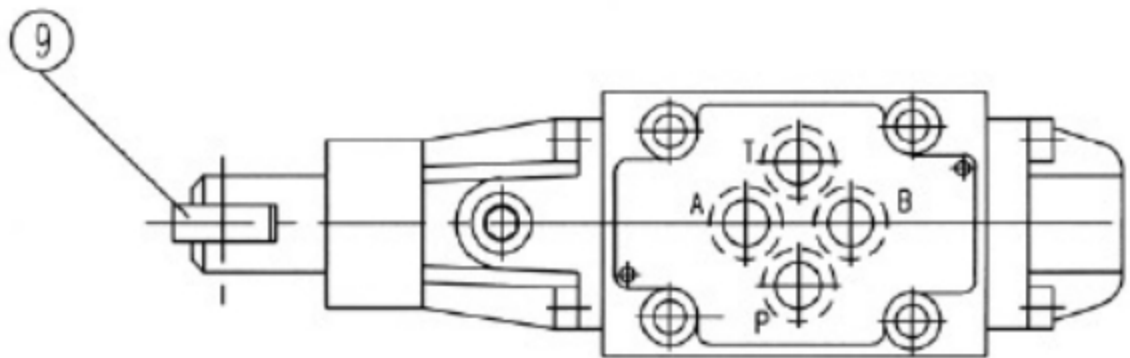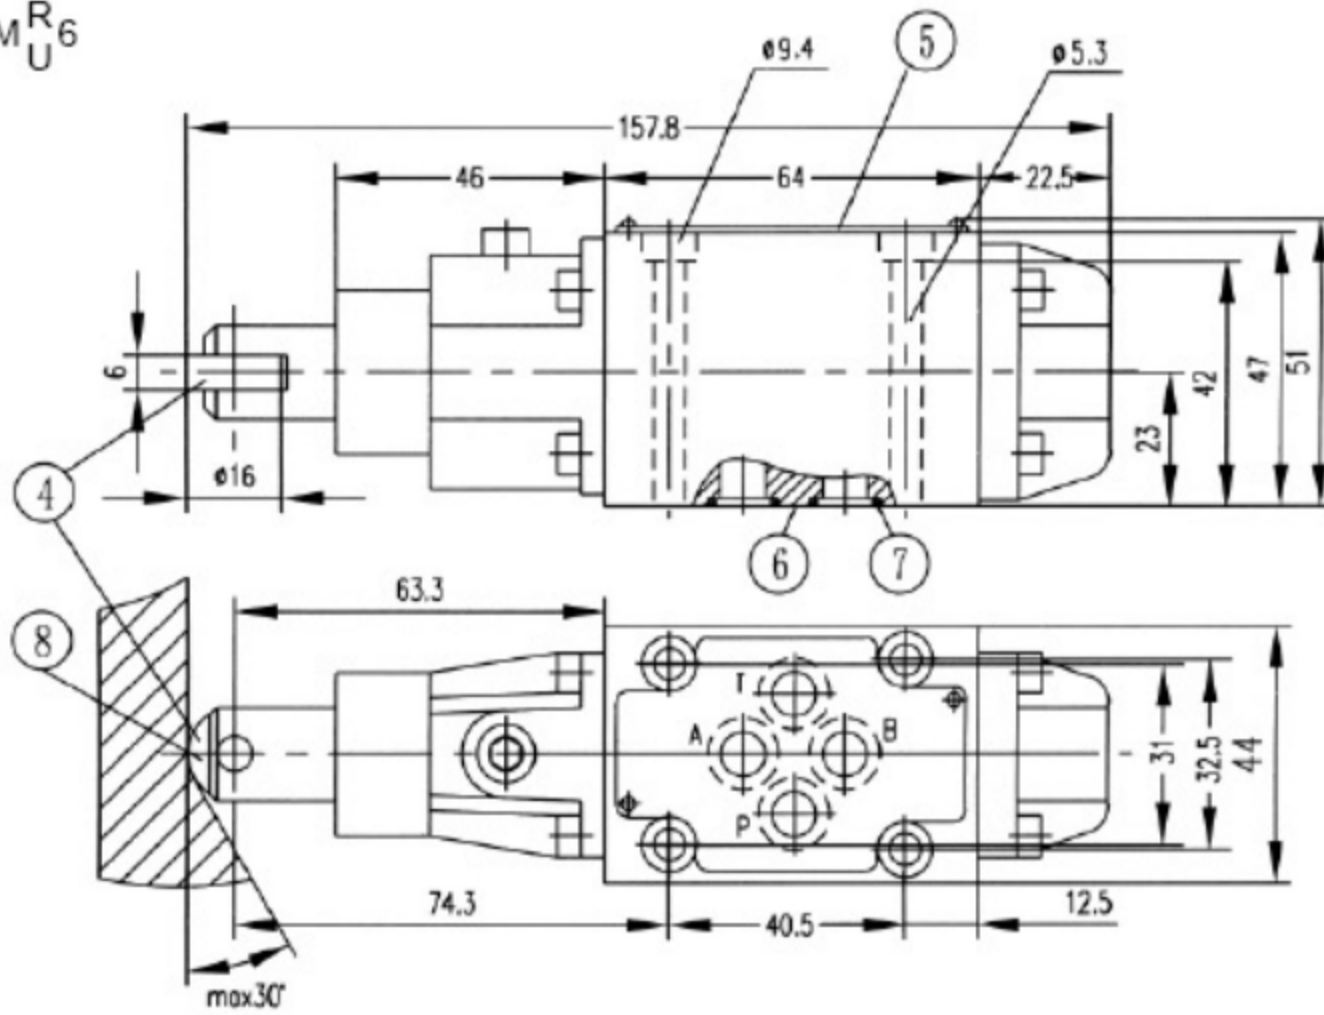

Roller lever assembled next to B end in 2-position valves of spools B.Y

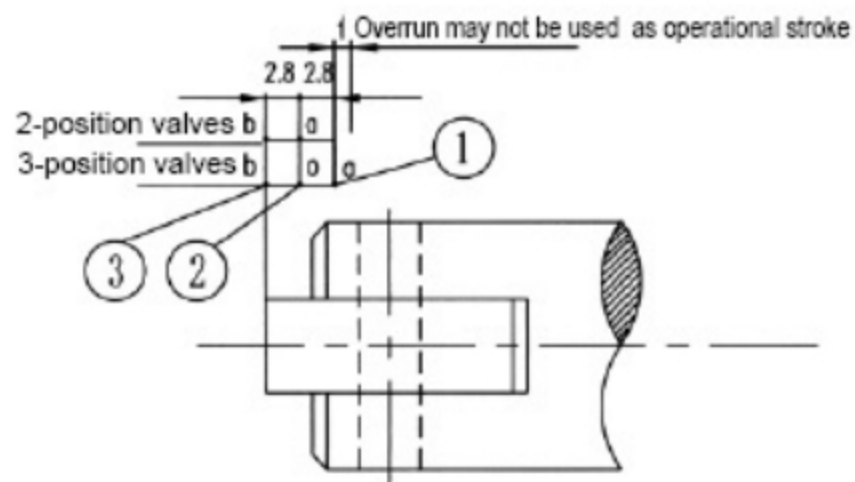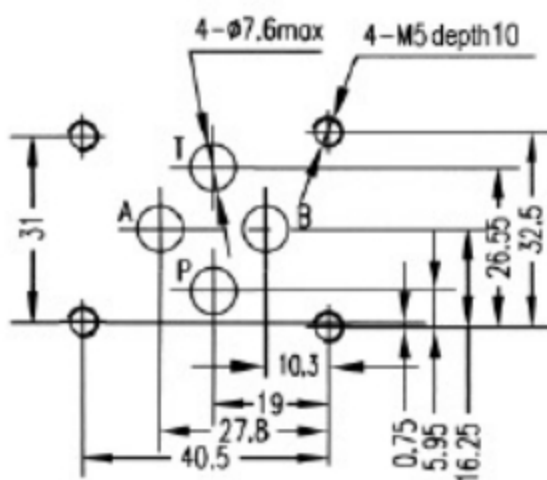

Subplates: see page 205

G341/01 (G1/4"); G341/02 (M14X1.5)

G342/01 (G3/8"); G342/02 (M18X1.5)



G502/01 (G1/2"); G502/02 (M22X1.5)

- 1, Spool position "a"
- 2, Spool position "o" and "a" (for 2-position valve)
- 3, Spool position "b"
- 4, Roller lever assembly may be stepped in 90°
- 5, Nameplate
- 6, Connection surface
- 7, O-ring 9.25X1.78 (for ports A, B, P, and T)
- 8, WMR, the code "R"
- 9, WMU, the code "U"

Unit dimensions

(Dimensions in mm)



WM R_{10}
U

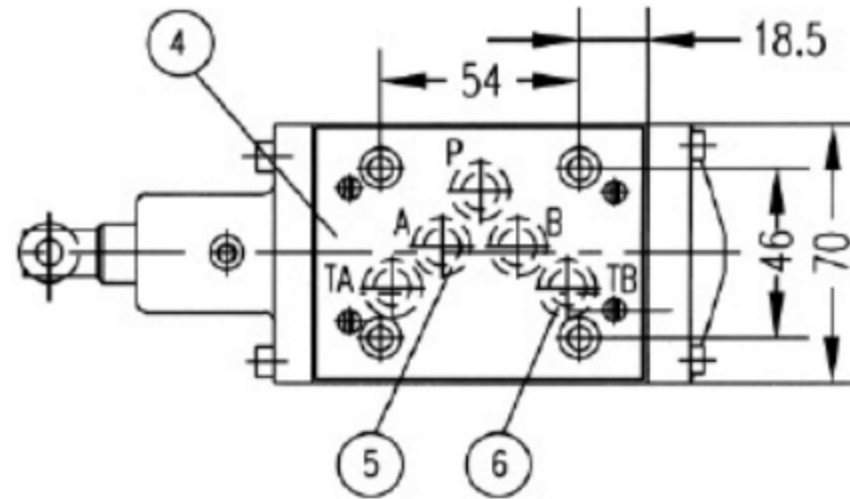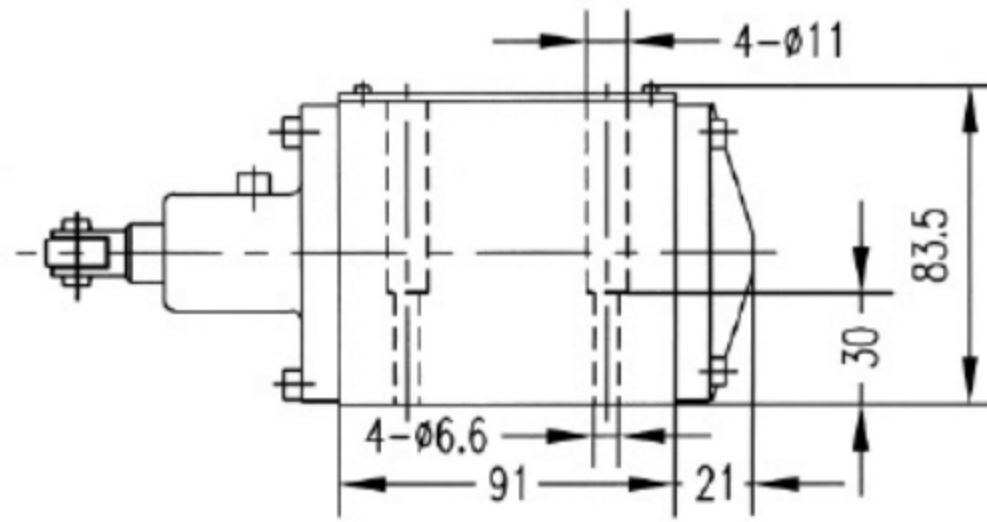



WMR

WMU

Roller lever assembled next to B end in 2-position valves of spools B.Y

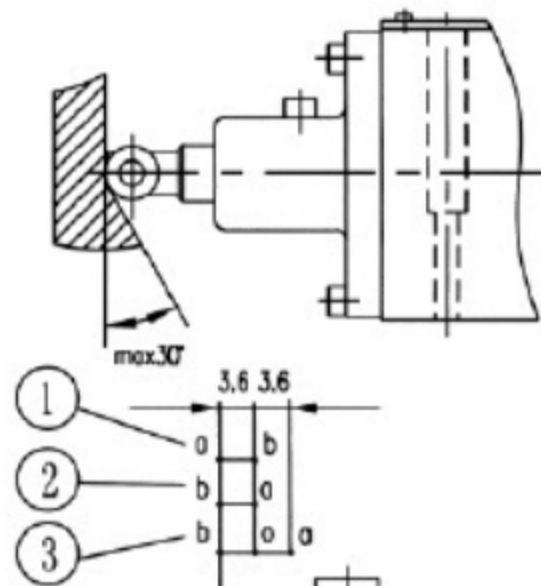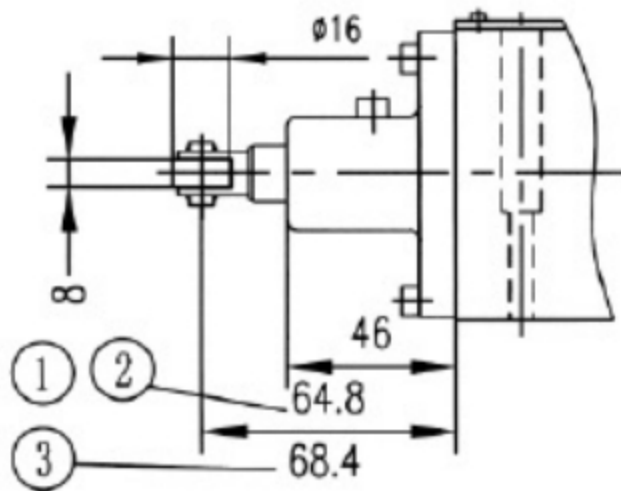

Required surface finish of mating piece

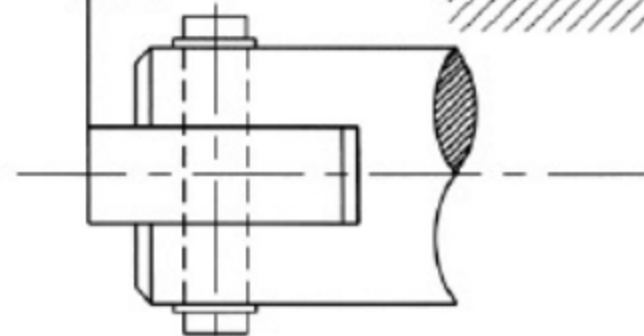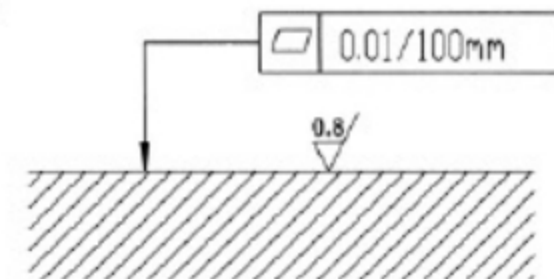

- 1, Two position valve (B, Y)
- 2, Two position valve (A, C, D)
- 3, Three position valve
- 4, Nameplate
- 5, O-ring12X2 (for ports A, B, P, and T)
- 6, Adjunctive port T can be connected with ZDR10D... in special condition

Subplates: see page 206

G66/01 (G3/8"); G66/02 (M18X1.5)

G67/01 (G1/2"); G67/02 (M22X1.5)

G534/01 (G3/4"); G534/02 (M27X2)