


Characteristics


Insulation Resistance	100M Ω min. (500VDC)	Item 4.11 of IEC 61810-7
Dielectric Strength Between Open Contacts Between Contact and Coil	50Hz 500V 50Hz 500V	Item 4.9 of IEC 61810-7 Item 4.9 of IEC 61810-7
Shock Resistance	196m/s ² 11ms	Item 4.26 of IEC 61810-7
Vibration Resistance	10Hz~40Hz Double amplitude 1.27mm 40Hz~70Hz 49m/s ² 70Hz~100Hz Double amplitude 0.5mm 100Hz~500Hz 98m/s ²	Item 4.28 of IEC 61810-7 Item 4.28 of IEC 61810-7
Terminals Strength	10N	Item 4.24 of IEC 61810-7
Ambient Temperature	-40 $^{\circ}$ C~125 $^{\circ}$ C	
Relative Humidity	5% to 85%	Item 4.16 of IEC 61810-7
Mass	21g	Item 4.7 of IEC 61810-7

Dimensions


mm

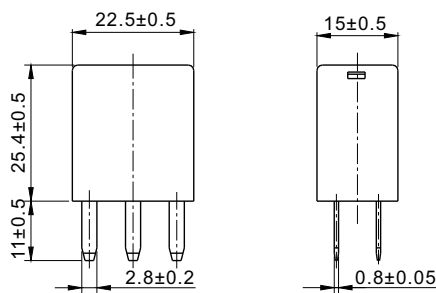


Dimensions



Mounting (Bottom view)




1A




1C

Standard




1A




1C

With diode



1A



1C

With resistor

Wiring diagram (Bottom view)