

Characteristics


Insulation Resistance	250M Ω min (at 500VDC)	Item 4.11 of IEC 61810-7
Dielectric Strength		
Between Contacts	50Hz 750V	Item 4.9 of IEC 61810-7
Between Contact and Coil	50Hz 1500V	Item 4.9 of IEC 61810-7
Shock Resistance	98m/s ² 11ms	Item 4.26 of IEC 61810-7
Vibration Resistance	10Hz~55Hz Double amplitude 1.5mm	Item 4.28 of IEC 61810-7
Terminals Strength	5N	Item 4.24 of IEC 61810-7
Ambient Temperature	-55 $^{\circ}$ C~85 $^{\circ}$ C	
Relative Humidity	5% to 85%	Item 4.16 of IEC 61810-7
Mass	9.5g	Item 4.7 of IEC 61810-7

Safety Approvals

Safety approval	UL&CUR	CQC
Load	10A/250VAC,277VAC 85 $^{\circ}$ C NO 12A/250VAC,277VAC 85 $^{\circ}$ C NO	10A/250VAC 85 $^{\circ}$ C 12A/250VAC 85 $^{\circ}$ C


Dimensions

mm

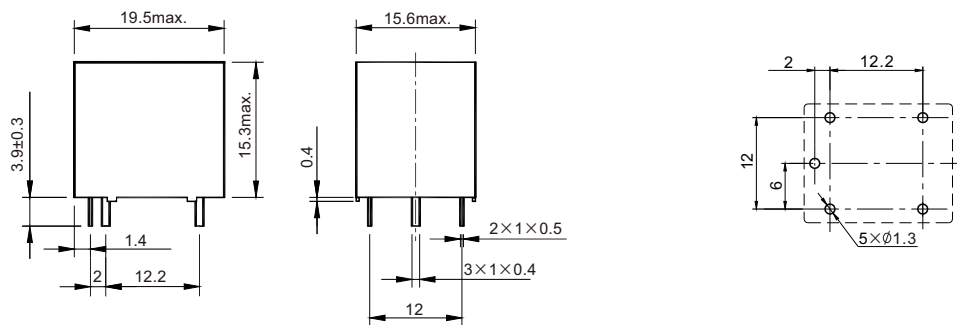

Dimensions

Mounting (Bottom view)



1A

1C

Wiring diagram(Bottom view)

CAUTION: In case of no tolerance shown in outline dimension: outline dimension ≤ 1 mm, tolerance should be ± 0.2 mm ;
outline dimension > 1 mm and ≤ 5 mm, tolerance should be ± 0.3 mm; outline dimension > 5 mm, tolerance should be ± 0.4 mm.

Reference Data

