



19×15.4×15

UL E160644

## Features

- Small size, light weight and heavy switching power.
- 20A switching capability. TV-12 switching capability.
- 3kV dielectric strength between the coil and contact.
- Product in accordance to IEC60335-1 available.
- Suitable for household electrical appliances, automation system, electronic equipment, instrument and meter application. TV remote control TV receivers, monitor display, audio equipment high and rushing current application.

## Ordering Information

**NT20** W C S 20 L DC12V

1 2 3 4 5 6 7

1 Part number: NT20	5 Contact rating: 16:16A/250VAC; 20:20A/250VAC;10:10A/250VAC
2 Nil:Standard; W: Wide terminal	6 Coil power: NIL:0.36W; L:0.2W
3 Contact arrangement: A:1A; C:1C	7 Coil rated voltage(V): DC:3,5,6,9,12,24,48
4 Enclosure: S: Wash tight; F: Flux proof	

Contact Arrangement	1A(SPSTNO) 1C(SPDT(B-M))	
Contact Material	AgSnO <sub>2</sub>	
	0.36W	0.2W
Contact Rating	NO: 20A,16A/250VAC;10A/28VDC NC: 12A/250VAC;7A/28VDC 1½HP 250VAC TV-10 240VAC	NO: 10A/250VAC NC: 7A/250VAC
Max. Switching Power	280W 5000VA	
Max. Switching Voltage	28VDC 277VAC	Max. Switching Current:20A
Contact Resistance	≤100mΩ	Item 4.12 of IEC 61810-7
Operational Life	Electrical	0.36W: NO: 20A/250VAC 85°C 5×10 <sup>4</sup> 16A/250VAC 105°C 1×10 <sup>5</sup> 10A/28VDC 105°C 2×10 <sup>4</sup> NC: 12A/250VAC 105°C 6×10 <sup>3</sup> 7A/28VDC 105°C 2×10 <sup>4</sup> 0.2W: NO: 10A/250VAC 105°C 1×10 <sup>5</sup> NC: 7A/250VAC 105°C 1×10 <sup>5</sup> 1½HP 250VAC 40°C 6×10 <sup>3</sup> TV-10 240VAC 40°C 2.5×10 <sup>4</sup> Item 4.30 of IEC 61810-7
	Mechanical	1×10 <sup>7</sup> Item 4.31 of IEC 61810-7

## Coil Parameter

Dash numbers	Coil voltage VDC		Coil resistance Ω ± 10%	Pick-up voltage VDC(max) (75%of rated voltage)	Drop-out voltage VDC(min) (10% of rated voltage)	Coil power W	Operate time ms	Release time ms
	Rated	Max.						
003-200	3	3.9	45	2.25	0.3	0.2	≤10	≤5
005-200	5	6.5	125	3.75	0.5			
006-200	6	7.8	180	4.50	0.6			
009-200	9	11.7	405	6.75	0.9			
012-200	12	15.6	720	9.00	1.2			
024-200	24	31.2	2880	18.0	2.4			
048-200	48	62.4	11520	36.0	4.8	0.36	≤10	≤5
003-360	3	3.9	25	2.25	0.3			
005-360	5	6.5	69.4	3.75	0.5			
006-360	6	7.8	100	4.50	0.6			
009-360	9	11.7	225	6.75	0.9			
012-360	12	15.6	400	9.00	1.2			
024-360	24	31.2	1600	18.0	2.4	6400		
048-360	48	62.4	6400	36.0	4.8			


## Characteristics

Insulation Resistance	100M $\Omega$ min (at 500VDC)	Item 4.11 of IEC 61810-7
Dielectric Strength Between Contacts Between Contact and Coil	50Hz 1000V 50Hz 3000V	Item 4.9 of IEC 61810-7 Item 4.9 of IEC 61810-7
Shock Resistance	98m/s <sup>2</sup> 11ms	Item 4.26 of IEC 61810-7
Vibration Resistance	10Hz~55Hz Double amplitude 1.5mm	Item 4.28 of IEC 61810-7
Terminals Strength	10N	Item 4.24 of IEC 61810-7
Ambient Temperature	-40°C~105°C	
Relative Humidity	5%~85%	Item 4.16 of IEC 61810-7
Mass	12g	Item 4.7 of IEC 61810-7

## Safety Approvals

Safety approval	UL&CUR	VDE	CQC
Load	NO: 20A/250VAC 85°C, 16A/250VAC 105°C, 10A/28VDC 105°C 1½HP 250VAC; TV-10 240VAC 40°C NC: 12A, 10A/250VAC 105°C, 7A/28VDC 105°C	NO: 20A/250VAC 85°C NO: 16A/250VAC 105°C NC: 12A/250VAC 105°C	NO: 20A/250VAC 85°C NO: 16A/250VAC 105°C NC: 12A/250VAC 105°C

## Dimensions

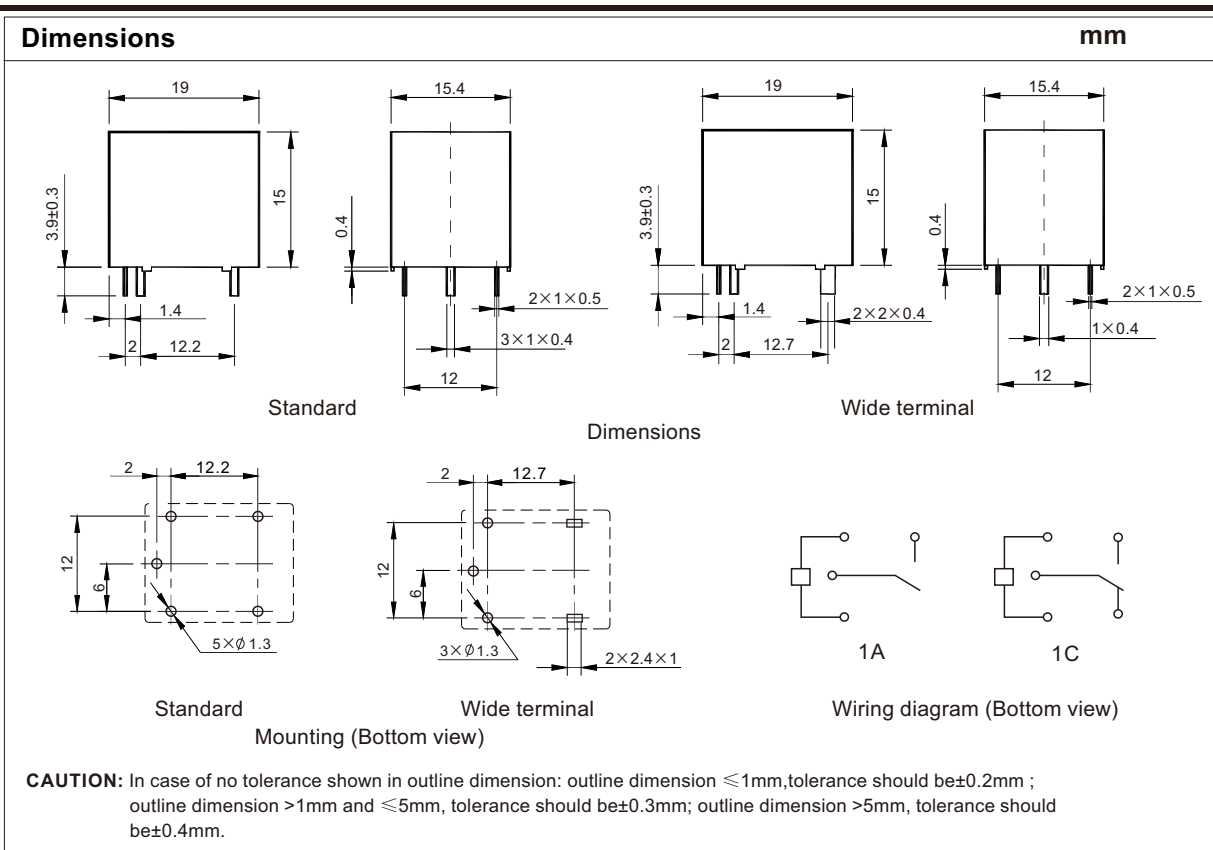

## Reference Data

