




## MODEL F · LED GROW LIGHT INSTALLATION INSTRUCTION


### FIXTURE & ACCESSORIES

- A. LED grow light fixture x1
- B. Driver x1
- C. Knob dimmer x1
- D. Driver holder x1
- E. External RJ14 Network cable x1
- F. Input Power cable x1
- G. Steel hanging cable x2
- H. Rope Ratchet x2

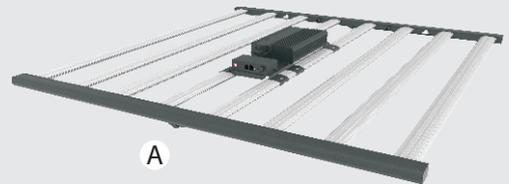

A

### PRODUCT DIMENSION

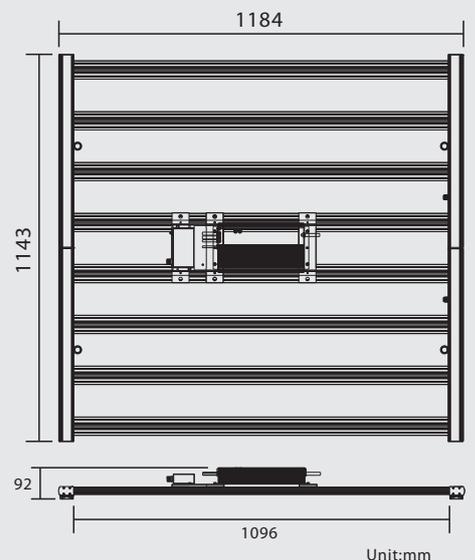

B



C




D



E



F



G




H

Remarks: The driver and the knob dimmer has usually been fixed onto the driver holder before shipment, which comes with the light fixture in another box.  
For non-dimmable light, the Accessory C and E is excluded.


## INSTALLATION INSTRUCTION

Be sure that the light fixture is unplugged from the power source before installation.

**STEP 1:** Take out the light fixture from the box, unfold it and place it horizontal at 180 degrees. At the same time, Prepare the driver for installation, which comes with the light fixture in another separate box.

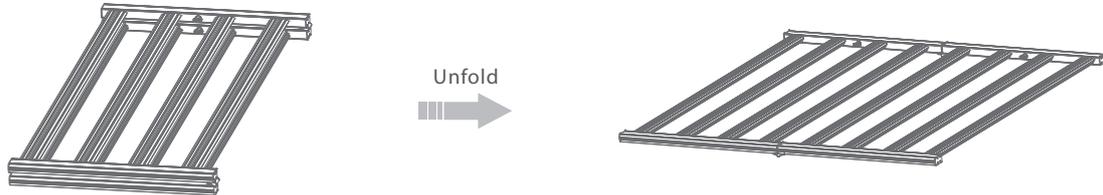


**STEP 2:** Fix the rope in/on the ceiling, beam or somewhere else. Make sure to fix the rope to something that can hold the weight of the LED light fixture.

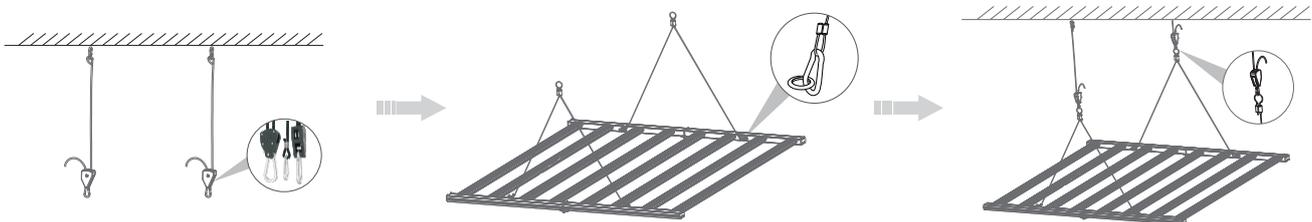

The length of the rope can be adjusted by pressing the clip on the ratchet.

Locate the 4 eye bolts on the fixture and slide the lance hanger clips onto two opposing eye bolts. Be sure to hang from the center of the lance hanger.


**STEP 3:** Clip the driver holder on the bars or hang it on the racks (normally the driver has been fixed onto the driver holder before shipment). and connect the DC male connector to the female one on the light fixture.

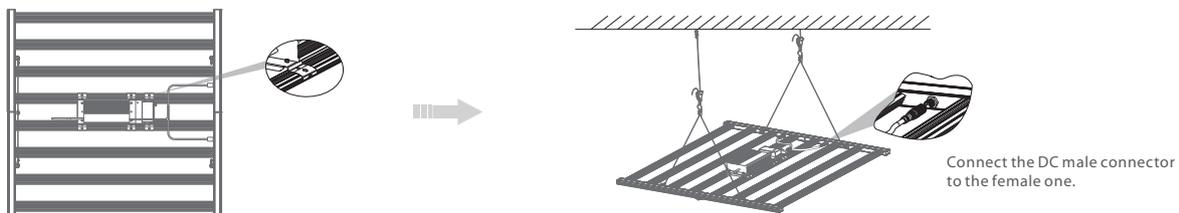

Connect the DC male connector to the female one.

**STEP 4:** Plug the RJ14 end into the port of the master controller. Use an interconnect network cable to connect RJ14 splitter to another on the LED fixture. Please see more details on the Master Controller User Manual.

**STEP 5:** Connect the AC connectors, plug it and power the fixture on. Then installation is completed.

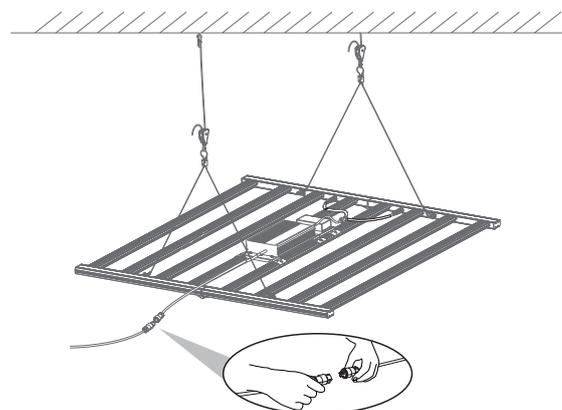

For any help when installation, please contact the manufacturer or the local distributor.