

# **GuangZhou FUWEI Electronic Technology Co.,Ltd**

## Plastic square shape photoelectric sensors FGQR18 series



#### **Features**


- ♦18mm threaded cylindrical installation or side installation, it is an ideal substitute for various styles of sensors;
- ◆Large angle, long distance, easy to install and debug;
- ♦ With 360° visible bright LED status indicator;





Part number							
	Emitter	Receiver	Emitte			Receiver	
NPN	FGQR18-2000T-E	FGQR18-2000NFT-R	PNP	FGQR <sup>2</sup>	18-2000T-E	FGQR18-2000PFT-R	
Technical specifications							
Detection type	Through beam	Through beam		nti-ambient light Anti-ambient light		nterference < 10,000lx;	
Rated distance [Sn]	] 020m	020m			Incandescent light	interference < 3,000lx	
Standard target	> Ф15mm opaqı	> Φ15mm opaque object		у	Green light: power	indicator	
Light source	Infrared LED (85	Infrared LED (850nm)			Yellow light: output	t indication, short circuit or	
Direction angle	> 4 °	>4°		overload indication		ı (flashing)	
Output	NO/NC	NO/NC		Ambient temperature		-15°C60°C	
Supply voltage	1030VDC	1030VDC		Ambient humidity		35-95%RH (non-condensing)	
Load current	≤100mA	≤100mA		Voltage withstand		1000V/AC 50/60Hz 60s	
Residual voltage	≤1V (Receiver)	≤1V (Receiver)		Insulation resistance		≥50MΩ (500VDC)	
Distance adjustmen	nt Single-turn poter	Single-turn potentiometer		Vibration resistance		1050Hz (0.5mm)	
Consumption curre	urrent ≤15mA (Emitter)、≤18mA (Receiver)		Degree of protection		IP67		
Circuit protection	Short-circuit, ove	Short-circuit, overload, reverse polarity		Housing material		ABS	
	and zener protec	ction	Installation met	hod	Composite installa	tion	
Response time	≤1ms	≤1ms		Optical components Plastic PMMA			
NO/NC adjustment	NO: white line is	NO: white line is connected to the positive		Weight 52g			
	electrode;		Connection type	е	2m PVC cable		
	NC: white line is	connected to the negative					
	electrode;						

### **Dimensions**

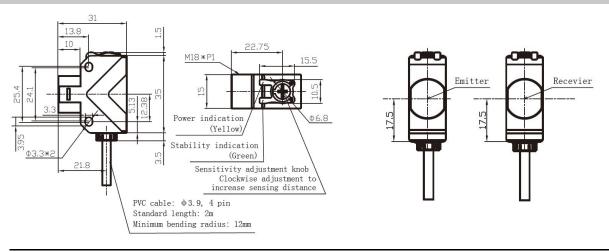



## Wiring diagram

Emitter

