


# **MA-510TR**



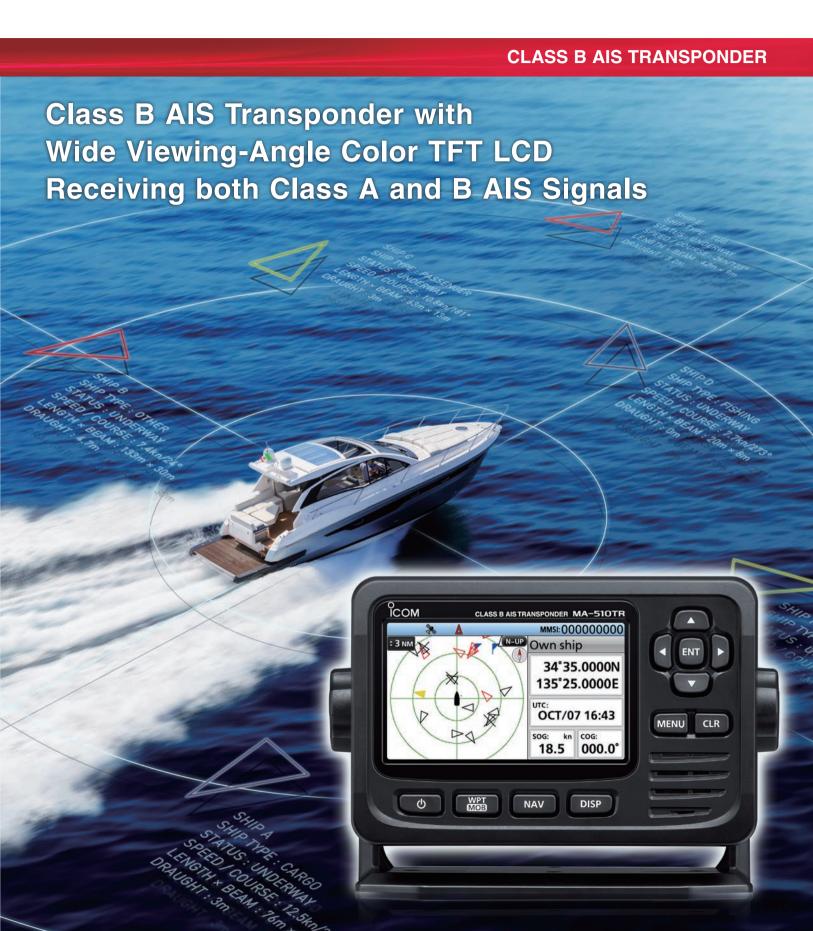

# **Risk Management and Simplified Navigation**

### 4.3-inch Color TFT LCD



Plotter screen (Day mode)

The wide viewing, high resolution 4.3-inch color TFT display clearly shows your and other vessels' positions. Potentially dangerous vessels are shown in red and ships registered as your friends

are shown in yellow. The day-mode display is readable in direct sunlight, and the night-mode display ensures good readability in the dark for further convenience.

# **AIS Target List and Details**

TARGET LIST( 6)			
MMSI/Name	RNG	BRG	
∆aSAMPLE1 🛣	0.4	309.5	
∆aSAMPLE2	1.2	283.4	
∆ <sub>A</sub> SAMPLE3	2.0	277.9	
∆aSAMPLE4	2.8	275.6	
∆ <sub>A</sub> SAMPLE5	3.6	274.4	

Target list screen



Detail screen examples


The 'Target' list screen shows all detected AIS equipped vessels and targets. The 'Danger' list screen shows a list of vessels that are within six nautical miles of Closest Point of Approach (CPA) and sixty minutes of Time to Closest Point of Approach (TCPA) from your vessel. The 'Friend' list screen displays the detected AIS targets that you set as friends. When you want to see target details, select the target by the cursor keys and push [ENT] key.

# **Simplified Navigation Function**

The Navigation function guides you to a specified waypoint or AIS target. You can assign a maximum of 100 favorite fishing spots or destinations as waypoints. The Navigation function is simply started by just selecting a waypoint or an AIS target on the display.



Plotter screen with Navigation screen




Navigation screen

# **Navigation to MOB Waypoint**

When the [WPT/MOB] button is held down, the MA-510TR automatically marks a waypoint of the vessel's current position and activates the MOB (Man Overboard) navigation function to the location the MOB event occurred.



Plotter screen with MOB Navigation screen



MOB Navigation screen



### Individual DSC Call

You can transmit an individual DSC Call by simply selecting an AIS target and the voice channel on the MA-510TR\*.

\* A compatible Icom VHF radio is required. The MA-510TR and a radio can be connected with the accessory cable. See the instruction manual of each for radio's connecting instructions.

# **USB Connectivity**

AIS data can be output from an USB cable connector on the rear panel\*

\* A third party application and a connection cable are required.

# **Supplied GPS Antenna**



The GPS receiver with SBAS function is integrated in the MA-510TR. Position information can be simply received with connection to the supplied GPS antenna with 10 m, 32.8 ft cable.

# NMEA 2000™, NMEA 0183/-HS Connectivity

With the plug-and-play functionality of NMEA 2000™, the MA-510TR can connect to a NMEA 2000™ network (an external plotter, marine radar and VHF radio). Using NMEA 0183/-HS connectivity, the transponder can connect to a transceiver, plotter device, marine radar, external GPS receiver, or switch button.

## **Collision Alarm Function**

When a vessel comes into the CPA or TCPA range, the vessel's icon blinks on the plotter display and a beep sound is heard. When connected to external audio equipment installed on the chart table or fly bridge, the collision alarm function will alert you, even when you are away from the AIS transponder.

# **Silent Mode for Security and Privacy**

Silent mode switches off the AIS transmitter and allows you to temporarily stop transmitting your vessel's position information. This function is useful when you do not want to reveal your fishing spots to other vessels. You can receive other vessel's AIS reports also while the silent mode is ON.

#### **Other Features**

- · Compatible with both 12 V and 24 V power sources
- · Multi-lingual user interface (English, French, Indonesian, Spanish and Vietnamese)
- $\cdot$  Anchor watch function sounds an alarm when your vessel is at anchor but has drifted
- · IPX7 waterproof protection (up to 1 m depth of water for 30 minutes; except connectors)

Supplied GPS antenna

#### **SPECIFICATIONS**

		GENERAL		
Frequency cov	/erage	161.500 MHz to 162.025 MHz		
Type of emission		16K0GXW (GMSK)		
Antenna impedance		50 Ω nominal		
Intermediate CH-A		1st: 21.700 MHz, 2nd: 450 kHz		
frequency	CH-B	1st: 30.150 MHz, 2nd: 450 kHz		
Operating tem	perature range	-20°C to +60°C, -4°F to +140°F		
Power supply	requirement	Negative ground: 12 V or 24 V DC nominal (9.6 to 31.2 V)		
Current drain (at 12 V DC)		TX: 1.5 A, RX: 0.7 A		
Dimensions (approximate)		166.2 (W) × 110.2 (H) × 92.5 (D) mm,		
(Projections not included)		6.5 (W) × 4.3 (H) × 3.6 (D) inch		
Weight (approximate)		700 g, 1.5 lb		
		TRANSMITTER		
Output power		2 W		
Modulation		16K0GXW (GMSK)		
Conducted spi	urious emission	Less than -36 dBm (9 kHz-1 GHz)		
Conductod opt		Less than -30 dBm (1 GHz-4 GHz)		
		RECEIVER (AIS)		
Sensitivity		Less than -110 dBm		
Adjacent channel selectivity		More than -31 dBm		
Spurious response		More than –31 dBm		
Intermodulation		More than -36 dBm		
Conducted spurious emission		Less than -57 dBm (9 kHz-1 GHz)		
Conducted spundes emission		Less than –47 dBm (1 GHz–4 GHz)		
Blocking		More than -15 dBm (±0.5 MHz-±5 MHz) More than -23 dBm (±5 MHz-±10 MHz)		
Co-channel		More than -111 dBm		
00 0110111101		RECEIVER (DSC)		
Frequency coverage		156.525 MHz		
Type of emission		16K0G2B		
Sensitivity		Less than –110 dBm		
Adjacent channel selectivity		More than 70 dB		
Spurious response		More than 70 dB		
Intermodulation		More than –39 dBm		
Blocking		More than –30 dBm		
Blocking		GPS ANTENNA		
Descived from	100001			
Received frequency		1575.42 MHz		
Acquisition		72 ch (maximum)		
Differential satellites		WAAS, EGNOS, MSAS, GAGAN		
Dimensions (approximate)		96.2 × 225 (H) mm, 3.8 × 8.9 (H) inch		
Weight (approximate)		700 g, 1.5 lb (including cable and mounting bracket)		
Cable length (approximate)		10 m, 32.8 ft		
		DATA INTERFACE		
USB (Type-B Mini)		GGA, GNS, GLL, GSA, GSV, RMC, VTG, VDM, VDO, ACA, ACS, ALR, TX		
	Input	059392/904, 060160/416/928, 065240, 126208/996, 129026/029/54		
		059392/904, 060416/928, 126208/464/993/996/998, 129026/029/038/039/040/041/539/540/545/792/793/794/797/79		
	Output	801/802/803/805/806/807/809/810/811		
	NMEA	801/802/803/805/806/807/809/810/811 4800–38400 bps Input/Output, sentence format		
	NMEA	4800–38400 bps Input/Output, sentence format		
NMEA 2000™				
	NMEA Input/Output	4800-38400 bps Input/Output, sentence format (Output: GGA, GNS, GLL, GSA', GSV', RMC, VTG, GBS, DTM, DS		
NMEA 2000™	NMEA Input/Output External GPS	4800–38400 bps Input/Output, sentence format (Output: GGA, GNS, GLL, GSA'', GSV'', RMC, VTG, GBS, DTM, DS 4800–38400 bps Input, sentence format		

<sup>\*1</sup> Only 38400 bps. \*2 When a received GPS signal does not include a GBS sentence, the transponder will not receive the signal from the external GPS receiver.

# All stated specifications are subject to change without notice or obligation. lcom, Icom Inc. and the Icom logo are registered trademarks of Icom Incorporated (Japan) in Japan, the United States, the United Kingdom, Germany, France, Spain, Russia, Australia, New Zealand and/or other countries. NMEA 2000 is a trademark of the National Maritime Electronics Association, Inc. All other trademarks are the properties of their respective holders.

1-1-32, Kamiminami, Hirano-Ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013

Count on us!

Icom America Inc.

Icom Inc.

www.icomamerica.com

Icom Canada www.icomcanada.com

Icom Brazil

E-mail: sales@icombrazil.com

Icom (Europe) GmbH www.icomeurope.com

Icom Spain S.L. www.icomspain.com

Icom (UK) Ltd. www.icomuk.co.uk

Icom France s.a.s. www.icom-france.com

#### **OPTIONS**



For flush-mounting the MA-510TR to a flat surface, such as a control panel.




For flush-mounting the MA-510TR to a flat surface, such as a control panel.


#### CS-MA510TR

PROGRAMMING SOFTWARE

#### **REAR PANEL VIEW**

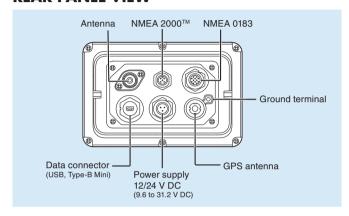

#### **DIMENSIONS**

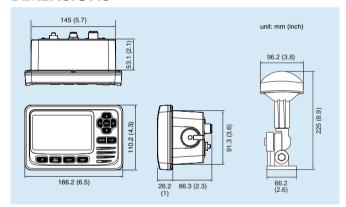

Supplied Accessories:

Icom (Australia) Pty. Ltd.

www.icom.net.au

#### Compatible Icom VHF Radios\* with the MA-510TR:

IC-M605, IC-M605EURO, IC-M506, IC-M506EURO, IC-M506GE, IC-M424, IC-M424G, IC-M423, IC-M423G, IC-M423GE, IC-M400BB, IC-M400BBE, IC-M330, IC-M330G, IC-M330GE, IC-M324, IC-M324G, IC-M323, IC-M323G \* As of May 2020

www.icomjapan.com

Your local distributor/dealer: