



## Catalog

**Our Products Range** [click below pictures for more details...](#)

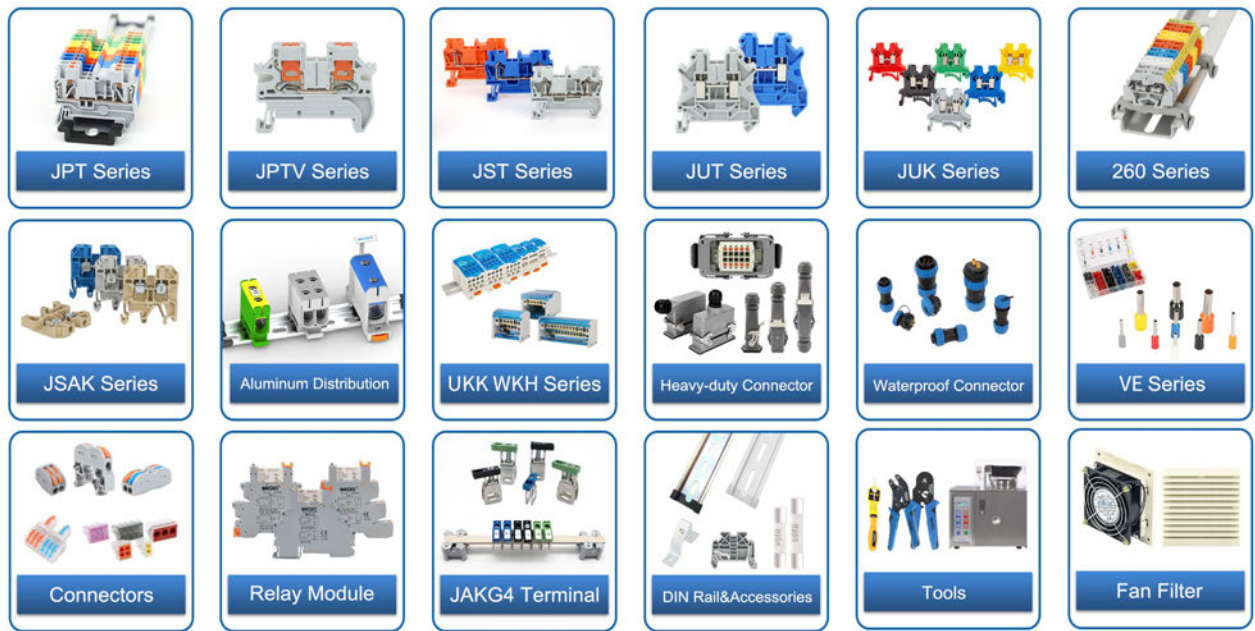


No.	ITEM	PART NO.	Order No.	Parameter: Voltage(V) / Current(A) Rigid / Flexible conductor Dimension (mm)	PIC.	REF.
<p><b>How to get the Order No.</b>                      Example: JUK2.5B Grey, Order No. is 100101002,                      If JUK2.5B Black, add the color code, Order No. is 100101002BK</p>				<p>Color</p>	<p>Black: BK    Orange: OG    Beige: BG                      Blue: BU    Yellow: YE                      Red: RD    Green: GN</p>	

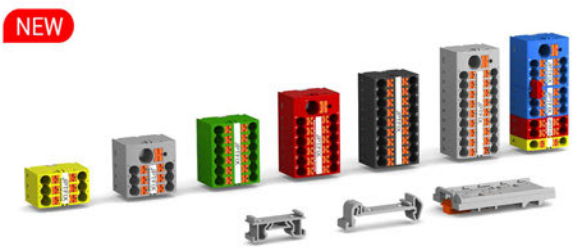


**Distribution Block Series**  
 Push-in, tool-free support fast installation  
 Compact design saving space  
 Flexible mounting options with various mounting adapters and special adhesive versions

1	<b>NEW</b> Distribution Block, Connections: 2 Color	JPTFIX2X2.5	Grey:100411001	690V/24A 0.14-4mm <sup>2</sup> /0.14-2.5mm <sup>2</sup> L28.6/H21.8/W6mm		Plug-in bridge: FBS2-5
2	<b>NEW</b> Distribution Block, Connections: 4 Color	JPTFIX4X2.5	Grey:100411002	690V/24A 0.14-4mm <sup>2</sup> /0.14-2.5mm <sup>2</sup> L28.6/H21.8/W11.1mm		Plug-in bridge: FBS2-5
3	<b>NEW</b> Distribution Block, Connections: 6 Color	JPTFIX6X2.5	Grey:100411003	690V/24A 0.14-4mm <sup>2</sup> /0.14-2.5mm <sup>2</sup> L28.6/H21.8/W16.3mm		Plug-in bridge: FBS2-5
4	<b>NEW</b> Distribution Block, Connections: 12 Color	JPTFIX12X2.5	Grey:100411004	690V/24A 0.14-4mm <sup>2</sup> /0.14-2.5mm <sup>2</sup> L28.6/H21.8/W31.7mm		Plug-in bridge: FBS2-5
5	<b>NEW</b> Distribution Block, Connections: 18 Color	JPTFIX18X2.5	Grey:100411005	690V/24A 0.14-4mm <sup>2</sup> /0.14-2.5mm <sup>2</sup> L28.6/H21.8/W47mm		Plug-in bridge: FBS2-5
6	<b>NEW</b> Distribution Block, Connections: 7 Color	JPTFIX6/6X2.5	Grey:100411006	690V/41A/24A Line contact: 0.5-10mm <sup>2</sup> /0.5-6mm <sup>2</sup> Load contact: 0.14-4mm <sup>2</sup> /0.14-2.5mm <sup>2</sup> L28.6/H21.8/W25.9mm		Plug-in bridge: FBS2-5
7	<b>NEW</b> Distribution Block, Connections: 13 Color	JPTFIX6/12X2.5	Grey:100411007	690V/41A/24A Line contact: 0.5-10mm <sup>2</sup> /0.5-6mm <sup>2</sup> Load contact: 0.14-4mm <sup>2</sup> /0.14-2.5mm <sup>2</sup> L28.6/H21.8/W41.2mm		Plug-in bridge: FBS2-5


8	<b>New</b> Distribution Block, Connections: 19 Color	JPTFIX6/18X2.5	Grey:100411008	690V/41A/24A Line contact: 0.5-10mm <sup>2</sup> /0.5-6mm <sup>2</sup> Load contact: 0.14-4mm <sup>2</sup> /0.14-2.5mm <sup>2</sup> L28.6/H21.8/W56.6mm		Plug-in bridge: FBS2-5
9	<b>New</b> NS35 Mounting Holder	JPTFIX2.5-NS35A	Grey:100416001	L43.8/H12/W9.7mm		Suitable for 35mm wide DIN rail
10	<b>New</b> NS15 Mounting Holder	JPTFIX2.5-NS15A	Grey:100416002	L28.6/H10.9/W9.7mm		Suitable for 15mm wide DIN rail
11	<b>New</b> NS35 Mounting Holder (Vertical alignment)	JPTFIX2.5-NS35	Grey:100416003	L58.5/H28.6/W9.7mm		Suitable for 15mm/35mm wide DIN rail
12	<b>New</b> Mounting Flange (Screw-on fixing)	JPTFIX-F	Grey:100416004	L28.6/H21.8/W8.6mm		Use screw to fix on the panel Maker Holder: JKLM3
13	<b>New</b> Marker Holder	JKLM3	Grey:100221004	L21.7/H27.5/W10mm		Suitable for: JPTFIX-F, WKF15, WKF35/S, WKL series



**JPTV Series Side Entry PUSH-IN Terminal Block**  
 1. Standard color: Gray, Blue, Orange.  
 2. Other color and Logo can be customized.

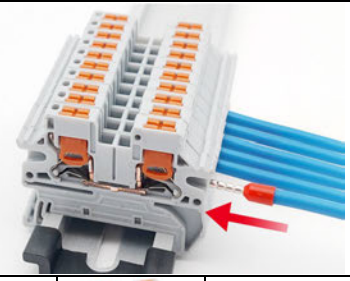

14	Push-in Side Entry Terminal Blocks Color	JPTV2.5	Grey:100111001	800V/28A 0.14-4mm <sup>2</sup> /0.14-2.5mm <sup>2</sup> L49.4/H35.2/W5.2 mm		End cover: D-IPTV2.5/4 Plug-in bridge: FBS2-5, 3-5, 4-5, 5-5, 10-5 Marker strip: ZB5
15	<b>New</b> Push-in Side Entry Double Level Terminal Blocks Color	JPTTBV2.5	Grey:100111002	800V/26A 0.14-4mm <sup>2</sup> /0.14-2.5mm <sup>2</sup> L102/H56.3/W5.2 mm <b>Developing</b>		End cover: D-JPTTBV2.5, DP-JPTTBV2.5 Plug-in bridge: FBS2-5, 3-5, 4-5, 5-5, 10-5
16	<b>New</b> Push-in Side Entry Double Level Terminal Blocks	JPTTBV2.5-PV	Grey:100111003	800V/26A 0.14-4mm <sup>2</sup> /0.14-2.5mm <sup>2</sup> L102/H56.3/W5.2 mm <b>Developing</b>		End cover: D-JPTTBV2.5, DP-JPTTBV2.5 Plug-in bridge: FBS2-5, 3-5, 4-5, 5-5, 10-5
17	<b>New</b> Push-in Side Entry Double Level Terminal Blocks with Diode	JPTTBV2.5-DT	Grey:100105029	800V/Current Depends on the Diode <b>Developing</b> 0.14-4mm <sup>2</sup> /0.14-2.5mm <sup>2</sup> L102/H56.3/W5.2 mm		End cover: D-JPTTBV2.5, DP-JPTTBV2.5 Plug-in bridge: FBS2-5, 3-5, 4-5, 5-5, 10-5
18	Push-in Side Entry Ground Terminal Blocks	JPTV2.5-PE	100112001	0.14-4mm <sup>2</sup> /0.14-2.5mm <sup>2</sup> L49.4/H35.2/W5.2 mm		End cover: D-IPTV2.5/4 Marker strip: ZB5
19	<b>New</b> Push-in Side Entry Double Level Terminal Blocks	JPTTBV2.5-PE	100112002	0.14-4mm <sup>2</sup> /0.14-2.5mm <sup>2</sup> L102/H56.3/W5.2 mm <b>Developing</b>		End cover: D-JPTTBV2.5, DP-JPTTBV2.5 Marker strip: ZB5
20	End Cover	D-JPTV2.5/4	Grey:100206001	L49.4/H29.2/W2 mm		Match with: JPTV2.5, JPTV4
21	End Cover	D-JPTTBV2.5	Grey:100206002	L101.9/H50.1/W2.5 mm <b>Developing</b>		Match with: JPTTBV2.5
22	Spacer End Cover	DP-JPTTBV2.5	Grey:100206003	L101.9/H29.1/W2.5 mm <b>Developing</b>		Match with: JPTTBV2.5

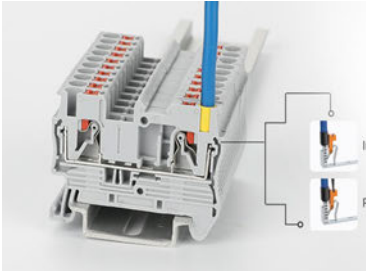







































**JPT Series PUSH-IN Terminal Block**  
 1. Standard color: Gray, Blue, Orange, Green, Yellow.  
 2. Other color and Logo can be customized.  
 3. Products can be made with Diode.



23	Push-in Terminal Blocks Color	JPT1.5/S	Grey:100105001	500V/17.5A 0.14-1.5mm <sup>2</sup> /0.14-1.5mm <sup>2</sup> L45/H31/W3.5 mm		End cover: D-IPT1.5/S Plug-in bridge: FBS10-3.5 Marker strip: ZB 3.5
24	Push-in Terminal Blocks Color	JPT2.5	Grey:100105002	800V/31A 0.2-4mm <sup>2</sup> /0.2-2.5mm <sup>2</sup> L48.5/H35.5/W5.2 mm		End cover: D-JST1.5-2.5 Plug-in bridge: FBS2-5, 3-5, 4-5, 5-5, 10-5 Marker strip: ZB5

25	Push-in Diode Terminal Blocks Color	JPT2.5-DT	Grey:100105026	800V/Current Depends on the Diode 0.2-4mm <sup>2</sup> /0.2-2.5mm <sup>2</sup> L48.5/H35.5/W5.2 mm		End cover: D-IST1.5-2.5 Plug-in bridge: FBS2-5, 3-5, 4-5, 5-5, 10-5 Marker strip: ZB 5
26	<b>new</b> Plug-in Terminal Blocks Color	JPT2.5/1P	Grey:100105031	500V/24A 0.2-4mm <sup>2</sup> /0.2-2.5mm <sup>2</sup> L48.5/H35.5/W5.2 mm		End cover: D-IST1.5-2.5 Plug-in bridge: FBS2-5, 3-5, 4-5, 5-5, 10-5 Marker strip: ZB5
27	<b>new</b> Plug-in Double Level Terminal Blocks Color	JPTTB2.5/2P	Grey:100105050	500V/22A 0.14-4mm <sup>2</sup> /0.14-2.5mm <sup>2</sup> L71.5/H46.5/W5.2 mm		End cover: D-JPTTB2.5/2P Plug-in bridge: FBS2-5, 3-5, 4-5, 5-5, 10-5 Marker strip: ZBFM5
28	<b>new</b> Plug, 1seats Color	JPPH2.5-1	Grey:100105037	500V/24A 0.14-4mm <sup>2</sup> /0.14-2.5mm <sup>2</sup>  <b>Yellow/Green color order number:</b> 100105037PE ..... 100105046PE		Match with: JPT 2.5/1P Marker strip: ZBFM5 
29	Plug, 2seats Color	JPPH2.5-2	Grey:100105038			
30	Plug, 3seats Color	JPPH2.5-3	Grey:100105039			
31	Plug, 4seats Color	JPPH2.5-4	Grey:100105040			
32	Plug, 5seats Color	JPPH2.5-5	Grey:100105041			
33	Plug, 6seats Color	JPPH2.5-6	Grey:100105042			
34	Plug, 7seats Color	JPPH2.5-7	Grey:100105043			
35	Plug, 8seats Color	JPPH2.5-8	Grey:100105044			
36	Plug, 9seats Color	JPPH2.5-9	Grey:100105045			
37	Plug, 10seats Color	JPPH2.5-10	Grey:100105046			
38	Push-in Terminal Blocks Color	JPT4	Grey:100105003	800V/41A 0.2-6mm <sup>2</sup> /0.2-4mm <sup>2</sup> L56/H36.5/W6.2 mm		End cover: D-IST 4 Plug-in bridge: FBS2-6,3-6, 4-6, 5-6, 10-6 Marker strip: ZB6
39	Push-in Terminal Blocks Color	JPT6	Grey:100105004	1000V/57A 0.5-10mm <sup>2</sup> /0.5-6mm <sup>2</sup> L57.7/H43.5/W8.2 mm		End cover: D-JPT6 Plug-in bridge: FBS2-8,3-8, 4-8, 5-8, 10-8 Marker strip: ZB8
40	Push-in Terminal Blocks Color	JPT10	Grey:100105005	1000V/70A 0.5-16mm <sup>2</sup> /0.5-10mm <sup>2</sup> L67.7/H49.5/W10.2 mm		End cover: D-JPT10 Plug-in bridge: FBS2-10 Marker strip: ZB10
41	Push-in Terminal Blocks Color	JPT16	Grey:100105006	1000V/85A 0.5-25mm <sup>2</sup> /0.5-16mm <sup>2</sup> L75.4/H52.6/W12.2 mm		End cover: D-IPT16 Plug-in bridge: FBS 2-12 Marker strip: ZB12
42	Push-in Twin Terminal Blocks Color	JPT1.5/S-TW	Grey:100105007	500V/17.5A 0.14-1.5mm <sup>2</sup> /0.14-1.5mm <sup>2</sup> L54.5/H30.5/W3.5 mm		End cover: D-JPT1.5/S-TW Plug-in bridge: FBS10-3.5 Marker strip: ZB3.5
43	Push-in Double Terminal Blocks Color	JPT1.5/S-QU	Grey:100105010	500V/17.5A 0.14-1.5mm <sup>2</sup> /0.14-1.5mm <sup>2</sup> L63.8/H30.5/W3.5 mm		End cover: D-IPT1.5/S-QU Plug-in bridge: FBS10-3.5 Marker strip: ZB 3.5
44	Push-in Twin Terminal Blocks Color	JPT2.5-TW	Grey:100105008	800V/28A 0.2-4mm <sup>2</sup> /0.2-2.5mm <sup>2</sup> L60.5/H36.5/W5.2 mm		End cover: D-IST2.5-TW Plug-in bridge: FBS2-5,3-5, 4-5, 5-5, 10-5 Marker strip: ZB5
45	Push-in Twin Diode Terminal Blocks Color	JPT2.5-TW-DT	Grey:100105027	800V/Current Depends on the Diode 0.2-4mm <sup>2</sup> /0.2-2.5mm <sup>2</sup> L60.5/H36.5/W5.2 mm		End cover: D-IST2.5-TW Plug-in bridge: FBS2-5, 3-5, 4-5, 5-5, 10-5 Marker strip: ZB5
46	Push-in Double Terminal Blocks Color	JPT2.5-QU	Grey:100105011	800V/28A 0.2-4mm <sup>2</sup> /0.2-2.5mm <sup>2</sup> L72.2/H36.5/W5.2 mm		End cover: D-IST2.5-QU Plug-in bridge: FBS2-5,3-5, 4-5, 5-5, 10-5 Marker strip: ZB5
47	Push-in Double Diode Terminal Blocks Color	JPT2.5-QU-DT	Grey:100105028	800V/Current Depends on the Diode 0.2-4mm <sup>2</sup> /0.2-2.5mm <sup>2</sup> L72.2/H36.5/W5.2 mm		End cover: D-IST2.5-QU Plug-in bridge: FBS2-5, 3-5, 4-5, 5-5, 10-5 Marker strip: ZB5
48	Push-in Twin Terminal Blocks Color	JPT4-TW	Grey:100105009	800V/32A 0.2-6mm <sup>2</sup> /0.25-4mm <sup>2</sup> L66.5/H36.5/W6.2 mm		End cover: D-JPT4-TW Plug-in bridge: FBS2-6,3-6, 4-6, 5-6, 10-6 Marker strip: ZB6
49	Push-in Double Terminal Blocks Color	JPT4-QU	Grey:100105012	800V/32A 0.2-6mm <sup>2</sup> /0.25-4mm <sup>2</sup> L77/H36.5/W6.2 mm		End cover: D-JPT4-QU Plug-in bridge: FBS2-6,3-6, 4-6, 5-6, 10-6 Marker strip: ZB 6
50	Push-in Twin Terminal Blocks Color	JPT6-TW	Grey:100105035	1000V/52A 0.5-10mm <sup>2</sup> /0.5-6mm <sup>2</sup> L75.2/H43/W8.2 mm		End cover: D-JPT6-TW Plug-in bridge: FBS2-8, 3-8, 4-8, 5-8, 10-8 Marker strip: ZB8
51	Push-in Double Terminal Blocks Color	JPT6-QU	Grey:100105036	1000V/52A 0.5-10mm <sup>2</sup> /0.5-6mm <sup>2</sup> L91.9/H43/W8.2 mm		End cover: D-JPT6-QU Plug-in bridge: FBS 2-8, 3-8, 4-8, 5-8, 10-8 Marker strip: ZB 8
52	Push-in Twin Terminal Blocks Color	JPT16-TW	Grey:100105054	1000V/85A 0.5-25mm <sup>2</sup> /0.5-16mm <sup>2</sup> L101/H53.2/W12.2 mm		End cover: D-IPT16-TW Plug-in bridge: FBS 2-12 Marker strip: ZB12
53	<b>new</b> Push-in Double Level Terminal Blocks Color	JPTTB1.5/S	Grey:100105013	500V/16A 0.14-1.5mm <sup>2</sup> /0.14-1.5mm <sup>2</sup> L65.7/H40.8/W3.5 mm		End cover: D-JPTTB 1.5 Plug-in bridge: FBS10-3.5 Marker strip: ZBFM3.5
54	Push-in Double Level Terminal Blocks, with equipotential bonder Color	JPTTB1.5/S-PV	Grey:100105014	500V/16A 0.14-1.5mm <sup>2</sup> /0.14-1.5mm <sup>2</sup> L65.7/H40.8/W3.5 mm		End cover: D-IPTTB1.5 Plug-in bridge: FBS10-3.5 Marker strip: ZBFM3.5
55	Push-in Double Level Terminal Blocks Color	JPTTB2.5	Grey:100105015	500V/26A 0.14-4mm <sup>2</sup> /0.14-2.5mm <sup>2</sup> L68.8/H46/W5.2 mm		End cover: D-JPTTB2.5 Plug-in bridge: FBS2-5,3-5, 4-5, 5-5, 10-5 Marker strip: ZBFM5

56	Push-in Double Level Terminal Blocks, with equipotential bonder Color 	JPTTB2.5-PV	Grey:100105016	500V/26A 0.14-4mm <sup>2</sup> /0.14-2.5mm <sup>2</sup> L68.8/H46/W5.2 mm		End cover: D-JPTTB2.5 Plug-in bridge: FBS2-5,3-5, 4-5, 5-5, 10-5 Marker strip: ZBFM5
<b>new</b>	Push-in Double Level Terminal Blocks, with bottom layer grounding Color 	JPTTB2.5-PE/L	Grey:100105016	500V/26A 0.14-4mm <sup>2</sup> /0.14-2.5mm <sup>2</sup> L68.8/H46/W5.2 mm		End cover: D-JPTTB2.5 Plug-in bridge: FBS2-5,3-5, 4-5, 5-5, 10-5 Marker strip: ZBFM5
<b>new</b>	Push-in Double Level Terminal Blocks, with bottom layer grounding Color 	JPTTB2.5-PE/N	Grey:100105016	500V/26A 0.14-4mm <sup>2</sup> /0.14-2.5mm <sup>2</sup> L68.8/H46/W5.2 mm		End cover: D-JPTTB2.5 Plug-in bridge: FBS2-5,3-5, 4-5, 5-5, 10-5 Marker strip: ZBFM5
<b>new</b>	Push-in Double Level Diode Terminal Blocks Color 	JPTTB2.5-DT	Grey:100105029	500V/Current Depends on the Diode 0.14-4mm <sup>2</sup> /0.14-2.5mm <sup>2</sup> L68.8/H46/W5.2 mm		End cover: D-JPTTB2.5 Plug-in bridge: FBS2-5, 3-5, 4-5, 5-5, 10-5 Marker strip: ZBFM5
60	Push-in Double Level Terminal Blocks Color 	JPTTB4	Grey:100105017	500V/32A 0.2-6mm <sup>2</sup> /0.2-4mm <sup>2</sup> L84.3/H46/W6.2 mm		End cover: D-JPTTB4 Plug-in bridge: FBS2-6,3-6, 4-6, 5-6, 10-6 Marker strip: ZBFM6
61	Push-in Double Level Terminal Blocks, with equipotential bonder Color 	JPTTB4-PV	Grey:100105018	500V/32A 0.2-6mm <sup>2</sup> /0.2-4mm <sup>2</sup> L84.3/H46/W6.2 mm		End cover: D-JPTTB4 Plug-in bridge: FBS2-6,3-6, 4-6, 5-6, 10-6 Marker strip: ZBFM6
62	Push-in Triple Level Terminal Blocks Color 	JPT1.5/S-3L	Grey:100105019	500V/15A 0.14-1.5mm <sup>2</sup> /0.14-1.5mm <sup>2</sup> L97.7/H51.5/W3.5mm		End cover: D-JPT 1.5/S-3L Plug-in bridge: FBS2-3.5, 3-3.5, 4-3.5, 5-3.5, 10-3.5 Marker strip: ZBFM3.5
63	Push-in Triple Level Terminal Blocks, with equipotential bonder Color 	JPT1.5/S-3L-PV	Grey:100105020	500V/15A 0.14-1.5mm <sup>2</sup> /0.14-1.5mm <sup>2</sup> L97.7/H51.5/W3.5mm		End cover: D-JPT 1.5/S-3L Plug-in bridge: FBS2-3.5, 3-3.5, 4-3.5, 5-3.5, 10-3.5 Marker strip: ZBFM3.5
64	Push-in Triple Level Terminal Blocks Color 	JPT2.5-3L	Grey:100105021	500V/24A 0.14-4mm <sup>2</sup> /0.14-2.5mm <sup>2</sup> L102.7/H56.6/W5.2 mm		End cover: D-JPT 2.5-3L Plug-in bridge: FBS2-5,3-5, 4-5, 5-5, 10-5 Marker strip: ZBFM5
65	Push-in Triple Level Terminal Blocks, with equipotential bonder Color 	JPT2.5-3L-PV	Grey:100105022	500V/24A 0.14-4mm <sup>2</sup> /0.14-2.5mm <sup>2</sup> L102.7/H56.6/W5.2 mm		End cover: D-JPT2.5-3L Plug-in bridge: FBS2-5,3-5, 4-5, 5-5, 10-5 Marker strip: ZBFM5
66	Push-in Triple Level Terminal Blocks with bottom layer grounding Color 	JPT2.5-PE/L/N	Grey:100105030	500V/24A 0.14-4mm <sup>2</sup> /0.14-2.5mm <sup>2</sup> L102.7/H56.6/W5.2 mm		End cover: D-JPT2.5-3L Plug-in bridge: FBS2-5,3-5, 4-5, 5-5, 10-5 Marker strip: ZBFM5
<b>new</b>	Push-in Triple Level Terminal Blocks, with bottom layer grounding Color 	JPT2.5-PE/L/L	Grey:100105030	500V/22A 0.14-4mm <sup>2</sup> /0.14-2.5mm <sup>2</sup> L102.7/H56.6/W5.2 mm		End cover: D-JPT2.5-3L Plug-in bridge: FBS2-5,3-5, 4-5, 5-5, 10-5 Marker strip: ZBFM5
68	Push-in FUSE Terminal Blocks Color 	JPT4-HESI	Grey:100105023	500V/6.3A 0.2-6mm <sup>2</sup> /0.25-4mm <sup>2</sup> L56/H64.8/W6.2 mm		End cover: D-JST4 Plug-in bridge: FBS2-6, 3-6, 4-6, 5-6, 10-6 Marker strip: ZBFM 6, ZB6(top) Fuse size: 5*20mm
69	Push-in FUSE Terminal Blocks With LED Color 	JPT4-HESILED	24V Grey: 100105052 220V Grey: 100105053	500V/6.3A 0.2-6mm <sup>2</sup> /0.25-4mm <sup>2</sup> L56/H64.8/W6.2 mm		End cover: D-JST4 Plug-in bridge: FBS2-6, 3-6, 4-6, 5-6, 10-6 Marker strip: ZBFM 6, ZB6(top) With LED: 24VDC, 220VAC Fuse size: 5*20mm
<b>new</b>	Push-in FUSE Terminal Blocks Color 	JPTC4-HESI	Grey:100105032	500V/6.3A 0.2-6mm <sup>2</sup> /0.25-4mm <sup>2</sup> L68.7/H42.1/W8.2 mm		End cover: D-JPTC4-HESI Plug-in bridge: FBS2-8, 3-8, 4-8, 5-8, 10-8 Marker strip: ZBFM 6, ZB6(top) Fuse size: 5*20mm
<b>new</b>	Push-in FUSE Terminal Blocks Color 	JPTTB4-HESI	Grey:100105057	500V/6.3A 0.2-6mm <sup>2</sup> /0.25-4mm <sup>2</sup> L102.9/H71.3/W6.2 mm Developing		End cover: D-JPTTB4-HESI Plug-in bridge: FBS2-6, 3-6, 4-6, 5-6, 10-6 Marker strip: ZBFM 6, ZB6(top) Fuse size: 5*20mm
<b>new</b>	Push-in FUSE Terminal Blocks With LED Color 	JPTTB4-HESILED	24V Grey: 100105058 220V Grey: 100105059	500V/6.3A 0.2-6mm <sup>2</sup> /0.25-4mm <sup>2</sup> L102.9/H71.3/W6.2 mm Developing		End cover: D-JPTTB4-HESI Plug-in bridge: FBS2-6, 3-6, 4-6, 5-6, 10-6 Marker strip: ZBFM 6, ZB6(top) With LED: 24VDC, 220VAC Fuse size: 5*20mm
73	Knife Disconnect Terminal Blocks	JPT4-MT	Grey:100105051	500V/20A 0.2-6mm <sup>2</sup> /0.25-4mm <sup>2</sup> L56/H36.5/W6.2 mm		End cover: D-IST4 Plug-in bridge: FBS2-6, 3-6, 4-6, 5-6, 10-6 Marker strip: ZBFM6
74	Push-in Ground Terminal Blocks	JPT1.5/S-PE	100106001	0.14-1.5mm <sup>2</sup> /0.14-1.5mm <sup>2</sup> L45/H31/W3.5 mm		End cover: D-JPT1.5/S Marker strip: ZB3.5
75	Push-in Ground Terminal Blocks	JPT2.5-PE	100106002	0.2-4mm <sup>2</sup> /0.2-2.5mm <sup>2</sup> L48.5/H35.5/W5.2 mm		End cover: D-IST2.5 Marker strip: ZB5
<b>new</b>	<b>Plug-in</b> Ground Terminal Blocks	JPT2.5/1P-PE	100106019	0.2-4mm <sup>2</sup> /0.2-2.5mm <sup>2</sup> L48.5/H35.5/W5.2 mm		End cover: D-IST1.5-2.5 Marker strip: ZB5

77	<b>new</b> <b>Plug-in</b> Ground Double Level Terminal Blocks	JPTTB2.5/2P-PE	100106021	0.14-4mm <sup>2</sup> /0.14-2.5mm <sup>2</sup> L71.5/H46.5/W5.2 mm		End cover: D-JPTTB2.5/2P Marker strip: ZBFM5
78	Push-in Ground Terminal Blocks	JPT4-PE	100106003	0.2-6mm <sup>2</sup> /0.2-4mm <sup>2</sup> L56/H36.5/W6.2 mm		End cover: D-IST4 Marker strip: ZB6
79	Push-in Ground Terminal Blocks	JPT6-PE	100106004	0.5-10mm <sup>2</sup> /0.5-6mm <sup>2</sup> L57.7/H43.5/W8.2 mm		End cover: D-JPT6 Marker strip: ZB8
80	Push-in Ground Terminal Blocks	JPT10-PE	100106005	0.5-16mm <sup>2</sup> /0.5-10mm <sup>2</sup> L67.7/H49.5/W10.2 mm		End cover: D-JPT10 Marker strip: ZB10
81	Push-in Ground Terminal Blocks	JPT16-PE	100106006	0.5-25mm <sup>2</sup> /0.5-16mm <sup>2</sup> L75.4/H52.6/W12.2 mm		End cover: D-JPT16 Marker strip: ZB10
82	Push-in Ground Twin Terminal Blocks	JPT1.5/S-TW-PE	100106007	0.14-1.5mm <sup>2</sup> /0.14-1.5mm <sup>2</sup> L54.5/H30.5/W3.5 mm		End cover: D-JPT1.5/S-TW Marker strip: ZB3.5
83	Push-in Ground Double Terminal Blocks	JPT1.5/S-QU-PE	100106010	0.14-1.5mm <sup>2</sup> /0.14-1.5mm <sup>2</sup> L63.8/H30.5/W3.5 mm		End cover: D-JPT1.5/S-QU Marker strip: ZB3.5
84	Push-in Ground Twin Terminal Blocks	JPT2.5-TW-PE	100106008	0.2-4mm <sup>2</sup> /0.2-2.5mm <sup>2</sup> L60.5/H36.5/W5.2 mm		End cover: D-IST2.5-TW Marker strip: ZB5
85	Push-in Ground Double Terminal Blocks	JPT2.5-QU-PE	100106011	0.2-4mm <sup>2</sup> /0.2-2.5mm <sup>2</sup> L72.2/H36.5/W5.2 mm		End cover: D-IST2.5-QU Marker strip: ZB5
86	Push-in Ground Twin Terminal Blocks	JPT4-TW-PE	100106009	0.2-6mm <sup>2</sup> /0.25-4mm <sup>2</sup> L66.5/H36.5/W6.2 mm		End cover: D-JPT4-TW Marker strip: ZB6
87	Push-in Ground Double Terminal Blocks	JPT4-QU-PE	100106012	0.2-6mm <sup>2</sup> /0.25-4mm <sup>2</sup> L77/H36.5/W6.2 mm		End cover: D-JPT4-QU Marker strip: ZB6
88	Push-in Ground Double Terminal Blocks	JPT6-TW-PE	100106016	0.5-10mm <sup>2</sup> /0.5-6mm <sup>2</sup> L75.2/H43/W8.2 mm		End cover: D-JPT6-TW Marker strip: ZB8
89	Push-in Ground Double Terminal Blocks	JPT6-QU-PE	100106017	0.5-10mm <sup>2</sup> /0.5-6mm <sup>2</sup> L91.9/H43/W8.2 mm		End cover: D-JPT6-QU Marker strip: ZB8
90	<b>new</b> Push-in Ground Twin Terminal Blocks	JPT16-TW-PE	100106022	0.5-25mm <sup>2</sup> /0.5-16mm <sup>2</sup> L101/H53.2/W12.2 mm <b>Developing</b>		End cover: D-JPT16-TW Marker strip: ZB12
91	Push-in Ground Double Level Terminal Blocks	JPTTB1.5/S-PE	100106013	0.14-1.5mm <sup>2</sup> /0.14-1.5mm <sup>2</sup> L65.7/H40.8/W3.5 mm		End cover: D-JPTTB1.5 Marker strip: ZBFM3.5
92	Push-in Ground Double Level Terminal Blocks	JPTTB2.5-PE	100106014	0.14-4mm <sup>2</sup> /0.14-2.5mm <sup>2</sup> L68.8/H46/W5.2 mm		End cover: D-JPTTB2.5 Marker strip: ZBFM5
93	Push-in Ground Double Level Terminal Blocks	JPTTB4-PE	100106018	0.2-6mm <sup>2</sup> /0.2-4mm <sup>2</sup> L68.8/H46/W5.2 mm		End cover: D-JPTTB4 Marker strip: ZBFM6
94	Push-in Ground Triple Level Terminal Blocks	JPT1.5/S-3L-PE	100106020	0.14-1.5mm <sup>2</sup> /0.14-1.5mm <sup>2</sup> L97.7/H51.5/W3.5mm		End cover: D-JPT1.5/S-3L Marker strip: ZBFM3.5
95	Push-in Ground Triple Level Terminal Blocks	JPT2.5-3L-PE	100106015	0.14-4mm <sup>2</sup> /0.14-2.5mm <sup>2</sup> L102.7/H56.6/W5.2 mm		End cover: D-JPT2.5-3L Marker strip: ZBFM5
96	End Cover	D-JPT1.5/S	Grey:100203001	L45/H24.6/W2.2mm		Match with: JPT1.5/S
97	End Cover	D-JPT6	Grey:100203002	L57.7/H36/W2.2 mm		Match with: JPT6
98	End Cover	D-JPT10	Grey:100203003	L67.7/H42.6/W2.2 mm		Match with: JPT10
99	End Cover	D-JPT16	Grey:100203004	L75.4/H45.6/W2.2 mm		Match with: JPT16

100	End Cover	D-JPT1.5/S-TW	Grey:100203005	L54.5/H24.6/W2.2mm		Match with: JPT1.5/S-TW
101	End Cover	D-JPT1.5/S-QU	Grey:100203013	L63.8/H24.6/W2.2mm		Match with: JPT1.5/S-QU
102	End Cover	D-JPT4-TW	Grey:100203006	L77/H26.2/W2.2mm		Match with: JPT4-TW
103	End Cover	D-JPT4-QU	Grey:100203007	L56/H29/W2.2mm		Match with: JPT4-QU
104	End Cover	D-JPT6-TW	Grey:100203014	L75.2/H36.3/W2.2mm		Match with: JPT6-TW
105	End Cover	D-JPT6-QU	Grey:100203015	L91.9/H36.3/W2.2mm		Match with: JPT6-QU
106	End Cover	D-JPT16-TW	Grey:100203020	L106/H45.9/W2.2mm		Match with: JPT16-TW
107	End Cover	D-JPTTB1.5/S	Grey:100203008	L65.7/H40.5/W1.9mm		Match with: JPTTB1.5/S
108	End Cover	D-JPTTB2.5	Grey:100203009	L68.8/H40/W2.2mm		Match with: JPTTB2.5
109	End Cover	D-JPTTB2.5/2P	Grey:100203018	L73/H41/W2mm		Match with: JPTTB2.5/2P
110	End Cover	D-JPTTB4	Grey:100203010	L83.6/H40.1/W2mm		Match with: JPTTB4
111	End Cover	D-JPTC4-HESI	Grey:100203019	L68.7/H32.7/W2.2mm		Match with: JPTC4-HESI
112	End Cover	D-JPTTB4-HESI	Grey:100203023	L102.9/H39.7/W2.2 mm <b>Developing</b>		Match with: JPTTB4-HESI
113	End Cover	D-JPT1.5/S-3L	Grey:100203017	L97.7/H45.2/W/1.9 mm		Match with: JPT1.5/S-3L
114	End Cover	D-JPT2.5-3L	Grey:100203011	L103/H51/W2 mm		Match with: JPT2.5-3L
115	Smaller Partition Plate	ATP-JST/JPT-S	Grey:100203016	L70/H38.6/W0.8 mm		Match with: JPT1.5/S, JPT1.5/S-TW, JPT1.5/S-QU, JPT2.5, JPT4, JST1.5, JST2.5, JPTV2.5, JPTV2.5-PE
116	Partition Plate	ATP-JST/JPT	Grey:100203012	L98.5/H50.7/W0.8 mm		Match with JPT, JST Series 
117	<b>Other detail list of FBS bridges in JST series, other detail list of ZB marker strips in JUK series.</b>					
118	Push-in Twin Terminal Blocks Color	JPT10-TW	Grey:100105055			
119	Push-in Double Terminal Blocks Color	JPT10-QU	Grey:100105056			
120	Push-in Connection Relay base (No plug-in relay)	JBPT1.5	Base:101001001	250V AC/DC /6A 0.14-1.5mm <sup>2</sup> /0.14-1.5mm <sup>2</sup> L93/H78/W6.2 mm		Plug-in bridge: FBS2-6.3-6.4-6.5-6.10-6 Marker strip: ZB6
121	Push-in Connection Relay Module with plug-in miniature relay <b>Available in 12V, 24V</b>	JBPT1.5 with Relay	12V: 101002006 24V: 101002007	250V AC/DC /6A 0.14-1.5mm <sup>2</sup> /0.14-1.5mm <sup>2</sup> L93/H78/W6.2 mm		Plug-in bridge: FBS2-6.3-6.4-6.5-6.10-6 Marker strip: ZB6 
122	Push-in Connection Relay base (No plug-in relay)	JAPT1.5	Base:101001002	250V AC/DC /6A 0.14-1.5mm <sup>2</sup> /0.14-1.5mm <sup>2</sup> L93/H78/W6.2 mm		Plug-in bridge: FBS2-6.3-6.4-6.5-6.10-6 Marker strip: ZB6

123	Push-in Connection Relay Module with plug-in miniature relay <b>Available in 12V, 24V</b>	JAPT1.5 with Relay	12V: 101002009 24V: 101002010	250V AC/DC /6A 0.14-1.5mm <sup>2</sup> /0.14-1.5mm <sup>2</sup> L93/H78/W6.2 mm		Plug-in bridge: FBS2-6.3-6.4-6.5-6.10-6 Marker strip: ZB6
124	Push-in Connection Relay base (No plug-in relay)	JTRP1.5	Base:101099001	250V AC/DC /6A 0.14-1.5mm <sup>2</sup> /0.14-1.5mm <sup>2</sup> L93/H84/W6.2 mm		Plug-in bridge: LBS20-1.5 Marker strip: ZB6
125	Push-in Connection Relay Module with plug-in miniature relay <b>Available in 12V, 24V</b>	JTRP1.5 with Relay	12V: 101002012 24V:101002013	250V AC/DC /6A 0.14-1.5mm <sup>2</sup> /0.14-1.5mm <sup>2</sup> L93/H84/W6.2 mm		Plug-in bridge: LBS20-1.5 Marker strip: ZB6
126	Screw Connection Relay base (No plug-in relay)	JTRS1.5	Base:101003001	250V AC/DC /6A 0.14-1.5mm <sup>2</sup> /0.14-1.5mm <sup>2</sup> L93/H79/W6.2 mm		Plug-in bridge: LBS20-1.5 Marker strip: ZB6
127	Screw Connection Relay Module with plug-in miniature relay <b>Available in 12V, 24V</b>	JTRS1.5 with Relay	12V: 101002015 24V:101002016	250V AC/DC /6A 0.14-1.5mm <sup>2</sup> /0.14-1.5mm <sup>2</sup> L93/H79/W6.2 mm		Plug-in bridge: LBS20-1.5 Marker strip: ZB6
128	20 Seats Plug-in Bridge	LBS20-1.5	101099001	For JTRP1.5/JTRS1.5 only		



**JST Series Spring Cage Terminal Block**

- Standard color: Gray, Blue, Orange.
- Other color and Logo can be customized.
- Products can be made with Diode.




Spring cage connection Diode

129	Spring-cage Terminal Blocks Color	JST1.5	Grey:100103001	500V/17.5A 0.14-1.5mm <sup>2</sup> /0.14-1.5mm <sup>2</sup> L49/H36/W4.2 mm		End cover: D-JST1.5-2.5 Plug-in bridge: FBS10-4 Marker strip: ZB4
130	Spring-cage Terminal Blocks Color	JST2.5	Grey:100103002	800V/31A 0.2-4mm <sup>2</sup> /0.2-2.5mm <sup>2</sup> L49/H35.5/W5.2 mm		End cover: D-JST1.5-2.5 Plug-in bridge: FBS2-5.3-5.4-5.5-5.10-5 Marker strip: ZB5
131	<b>New</b> Spring-cage Diode Terminal Blocks Color	JST2.5-DT	Grey:100103018	800V/Current Depends on the Diode 0.2-4mm <sup>2</sup> /0.2-2.5mm <sup>2</sup> L49/H35.5/W5.2 mm		End cover: D-JST1.5-2.5 Plug-in bridge: FBS2-5.3-5.4-5.5-5.10-5 Marker strip: ZB5
132	Spring-cage Terminal Blocks Color	JST4	Grey:100103003	800V/41A 0.5-6mm <sup>2</sup> /0.5-4mm <sup>2</sup> L56.5/H35.5/W6.2 mm		End cover: D-JST4 Plug-in bridge: FBS2-6.3-6.4-6.5-6.10-6 Marker strip: ZB6
133	Spring-cage Terminal Blocks Color	JST6	Grey:100103004	800V/57A 0.5-10mm <sup>2</sup> /0.5-6mm <sup>2</sup> L70/H43/W8.2 mm		End cover: D-JST6 Plug-in bridge: FBS2-8.3-8.4-8.5-8.10-8 Marker strip: ZB8
134	Spring-cage Terminal Blocks Color	JST10	Grey:100103005	1000V/57A 0.5-16mm <sup>2</sup> /0.5-10mm <sup>2</sup> L71.5/H49.5/W10.2 mm		End cover: D-JST10 Plug-in bridge: FBS2-10 Marker strip: ZB10
135	Spring-cage Terminal Blocks Color	JST16	Grey:100103021	1000V/90A 0.2-25mm <sup>2</sup> /0.2-16mm <sup>2</sup> L80.2/H51/W12.2 mm		End cover: D-JST16 Plug-in bridge: FBS2-12 Marker strip: ZB12
136	Spring-cage Terminal Blocks Color	JST35	Grey:100103027	1000V/125A 0.2-35mm <sup>2</sup> /0.2-35mm <sup>2</sup> L100/H58.9/W16.2 mm		End cover: D-JST35 Plug-in bridge: FBS2-16 Marker strip: ZB12
137	Spring-cage Twin Terminal Blocks Color	JST1.5-TW	Grey:100103025	500V/17.5A 0.08-1.5mm <sup>2</sup> /0.08-1.5mm <sup>2</sup> L60.9/H36/W4.2mm		End cover: D-JST2.5-TW Plug-in bridge: FBS10-4 Marker strip: ZB4
138	Spring-cage Twin Terminal Blocks Color	JST2.5-TW	Grey:100103006	800V/31*A 0.2-4mm <sup>2</sup> /0.2-2.5mm <sup>2</sup> L61/H36/W5.2 mm		End cover: D-JST2.5-TW Plug-in bridge: FBS2-5.3-5.4-5.5-5.10-5 Marker strip: ZB5
139	<b>New</b> Spring-cage Twin Diode Terminal Blocks Color	JST2.5-TW-DT	Grey:100103019	800V/Current Depends on the Diode 0.2-4mm <sup>2</sup> /0.2-2.5mm <sup>2</sup> L61/H36/W5.2 mm		End cover: D-JST2.5-3 Plug-in bridge: FBS2-5.3-5.4-5.5-5.10-5 Marker strip: ZB5
140	Spring-cage Twin Terminal Blocks Color	JST4-TW	Grey:100103007	800V/32*A 0.5-6mm <sup>2</sup> /0.5-4mm <sup>2</sup> L71.5/H36.5/W6.2 mm		End cover: D-JST4-TW Plug-in bridge: FBS2-6.3-6.4-6.5-6.10-6 Marker strip: ZB6
141	Spring-cage Double Terminal Blocks Color	JST1.5-QU	Grey:100103026	500V/17.5A 0.08-1.5mm <sup>2</sup> /0.08-1.5mm <sup>2</sup> L72.9/H36/W4.2mm		End cover: D-JST2.5-QU Plug-in bridge: FBS 10-4 Marker strip: ZB4
142	Spring-cage Double Terminal Blocks Color	JST2.5-QU	Grey:100103008	800V/30*A 0.2-4mm <sup>2</sup> /0.2-2.5mm <sup>2</sup> L72.5/H35.5/W5.2 mm		End cover: D-JST2.5-QU Plug-in bridge: FBS2-5.3-5.4-5.5-5.10-5 Marker strip: ZB 5

143	<b>new</b> Spring-cage Double Diode Terminal Blocks Color	JST2.5-QU-DT	Grey:100103020	800V/Current Depends on the Diode 0.2-4mm <sup>2</sup> /0.2-2.5mm <sup>2</sup> L72.5/H35.5/W5.2 mm		End cover: D-JST2.5-QU Plug-in bridge: FBS 2-5,3-5, 4-5, 5-5, 10-5 Marker strip: ZB 5
144	Spring-cage Double Terminal Blocks Color	JST4-QU	Grey:100103009	800V/40*A 0.5-6mm <sup>2</sup> /0.5-4mm <sup>2</sup> L87/H36/W6.2 mm		End cover: D-JST4-QU Plug-in bridge: FBS 2-6,3-6, 4-6, 5-6, 10-6 Marker strip: ZB6
145	Spring-cage Double Level Terminal Blocks Color	JSTTB2.5	Grey:100103010	500V/24A 0.2-4mm <sup>2</sup> /0.2-2.5mm <sup>2</sup> L68/H46/W5.2 mm		End cover: D-JSTTB2.5 Plug-in bridge: FBS2-5,3-5, 4-5, 5-5, 10-5 Marker strip: ZBFM5
146	Spring-cage Double Level Diode Terminal Blocks Color	JSTTB2.5-DT	Grey:100103024	500V/Current Depends on the Diode 0.2-4mm <sup>2</sup> /0.2-2.5mm <sup>2</sup> L68/H46/W5.2 mm		End cover: D-JSTTB2.5 Plug-in bridge: FBS2-5,3-5, 4-5, 5-5, 10-5 Marker strip: ZBFM 5
147	Spring-cage Double Level Terminal Blocks, with equipotential bonder Color	JSTTB2.5-PV	Grey:100103011	500V/24A 0.2-4mm <sup>2</sup> /0.2-2.5mm <sup>2</sup> L68/H46/W5.2 mm		End cover: D-JSTTB2.5 Plug-in bridge: FBS2-5,3-5, 4-5, 5-5, 10-5 Marker strip: ZBFM5
148	Spring-cage Double Level Terminal Blocks Color	JSTTB4	Grey:100103022	500V/32A 0.08-6mm <sup>2</sup> /0.08-4mm <sup>2</sup> L84.4/H46.3/W6.2 mm		End cover: D-JSTTB4 Plug-in bridge: FBS2-6,3-6, 4-6, 5-6, 10-6 Marker strip: ZBFM6
149	Spring-cage Double Level Terminal Blocks, with equipotential bonder Color	JSTTB4-PV	Grey:100103023	500V/32A 0.08-6mm <sup>2</sup> /0.08-4mm <sup>2</sup> L84.4/H46.3/W6.2 mm		End cover: D-JSTTB2.5 Plug-in bridge: FBS2-5,3-5, 4-5, 5-5, 10-5 Marker strip: ZBFM6
150	Spring-cage Three Level Terminal Blocks Color	JST2.5-3L	Grey:100103012	500V/28A 0.2-4mm <sup>2</sup> /0.2-2.5mm <sup>2</sup> L99.5/H57/W5.2 mm		End cover: D-JST2.5-3L Plug-in bridge: FBS2-5,3-5, 4-5, 5-5, 10-5 Marker strip: ZBFM5
151	Spring-cage Three Level Terminal Blocks, with equipotential bonder Color	JST2.5-3L-PV	Grey:100103013	500V/28A 0.2-4mm <sup>2</sup> /0.2-2.5mm <sup>2</sup> L99.5/H57/W5.2 mm		End cover: D-JST2.5-3L Plug-in bridge: FBS2-5,3-5, 4-5, 5-5, 10-5 Marker strip: ZBFM5
152	Spring-cage Three Level Terminal Blocks	JDL2.5-3VN	Grey:100103014	500V/20A 0.2-4mm <sup>2</sup> /0.2-2.5mm <sup>2</sup> L110.5/H69.5/W5.2 mm		End cover: D-JDL2.5-3VN
153	Fuse Terminal Blocks With Disconnect Lever Color	JST4-HESI	Grey:100103015	300V6.3A 0.08-6mm <sup>2</sup> /0.8-4mm <sup>2</sup> L61.5/H62.5/W5.2 mm		Plug-in bridge: FBS2-6,3-6, 4-6, 5-6,10-6 Marker strip: ZB6, ZBFM6 Fuse size: 5*20mm
154	Fuse Terminal Blocks With Disconnect Lever with LED Color	JST4-HESILED	24V Grey: 100103016 220V Grey: 100103028	300V6.3A 0.08-6mm <sup>2</sup> /0.8-4mm <sup>2</sup> L61.5/H62.5/W5.2 mm		Plug-in bridge: FBS2-6,3-6, 4-6, 5-6,10-6 Marker strip: ZB6, ZBFM6 With LED:24VDC,220VAC Fuse size: 5*20mm
155	Knife Disconnect Terminal Blocks	JST4-MT	Grey:100103017	400V/20A 0.08-6mm <sup>2</sup> /0.08-4mm <sup>2</sup> L61.5/H36.5/W6.2 mm		Plug-in bridge: FBS2-6, 3-6, 4-6, 5-6, 10-6 Marker strip: ZBFM6
156	Spring-cage Ground Terminal Blocks	JST1.5-PE	100104001	0.14-1.5mm <sup>2</sup> /0.14-1.5mm <sup>2</sup> L49.2/H36/W4.2 mm		End cover: D-JST1.5-2,5 Marker strip: ZB4
157	Spring-cage Ground Terminal Blocks	JST2.5-PE	100104002	0.2-4mm <sup>2</sup> /0.2-2.5mm <sup>2</sup> L49/H35.5/W5.2 mm		End cover: D-JST2.5 Marker strip: ZB5
158	Spring-cage Ground Terminal Blocks	JST4-PE	100104003	0.5-6mm <sup>2</sup> /0.5-4mm <sup>2</sup> L56.5/H35.5/W6.2 mm		End cover: D-JST4 Marker strip: ZB6
159	Spring-cage Ground Terminal Blocks	JST6-PE	100104004	0.5-10mm <sup>2</sup> /0.5-6mm <sup>2</sup> L70/H43/W8.2 mm		End cover: D-JST6 Marker strip: ZB8
160	Spring-cage Ground Terminal Blocks	JST10-PE	100104005	0.5-16mm <sup>2</sup> /0.5-10mm <sup>2</sup> L71.5/H49.5/W10.2 mm		End cover: D-JST10 Marker strip: ZB10
161	<b>new</b> Spring-cage Ground Terminal Blocks	JST16-PE	100104011	0.2-25mm <sup>2</sup> /0.2-16mm <sup>2</sup> L80.2/H51/W12.2 mm		End cover: D-JST16 Marker strip: ZB12
162	<b>new</b> Spring-cage Ground Terminal Blocks	JST35-PE	100104013	0.2-35mm <sup>2</sup> /0.2-35mm <sup>2</sup> L100/H58.9/W16.2 mm		End cover: D-JST35 Marker strip: ZB12
163	Spring-cage Twin Ground Terminal Blocks	JST1.5-TW-PE	100104014	0.08-1.5mm <sup>2</sup> /0.08-1.5mm <sup>2</sup> L60.9/H36/W4.2mm		End cover: D-JST2.5-TW Marker strip: ZB4
164	Spring-cage Twin Ground Terminal Blocks	JST2.5-TW-PE	100104006	0.2-4mm <sup>2</sup> /0.2-2.5mm <sup>2</sup> L61/H36/W5.2 mm		End cover: D-JST2.5-TW Marker strip: ZB5



165	Spring-cage Twin Ground Terminal Blocks	JST4-TW-PE	100104007	0.5-6mm <sup>2</sup> /0.5-4mm <sup>2</sup> L71.5/H36.5/W6.2 mm		End cover: D-JST4-TW Marker strip: ZB6
166	Spring-cage Double Ground Terminal Blocks	JST1.5-QU-PE	100104015	0.08-1.5mm <sup>2</sup> /0.08-1.5mm <sup>2</sup> L72.9/H36/W4.2mm		End cover: D-JST2.5-QU Marker strip: ZB4
167	Spring-cage Double Ground Terminal Blocks	JST2.5-QU-PE	100104008	0.2-4mm <sup>2</sup> /0.2-2.5mm <sup>2</sup> L72.5/H35.5/W5.2 mm		End cover: D-JST2.5-QU Marker strip: ZB5
168	Spring-cage Double Ground Terminal Blocks	JST4-QU-PE	100104009	0.5-6mm <sup>2</sup> /0.5-4mm <sup>2</sup> L87/H36/W6.2 mm		End cover: D-JST4-QU Marker strip: ZB6
169	Spring-cage Two Level Ground Terminal Blocks	JSTTB2.5-PE	100104010	0.2-4mm <sup>2</sup> /0.2-2.5mm <sup>2</sup> L68/H46/W5.2 mm		End cover: D-JSTTB2.5 Marker strip: ZBEM5
170	Spring-cage Two Level Ground Terminal Blocks	JSTTB4-PE	100104012	0.08-6mm <sup>2</sup> /0.08-4mm <sup>2</sup> L84.4/H46.3/W6.2 mm		End cover: D-JSTTB4 Marker strip: ZBFM6
171	End Cover	D-JST1.5-2.5	Grey:100202001	L49.2/H30/W2.2 mm		Match with: JST1.5, JST2.5
172	End Cover	D-JST4	Grey:100202002	L56.5/H30/W2.2 mm		Match with: JST4
173	End Cover	D-JST6	Grey:100202003	L70/H36.6/W2.2 mm		Match with: JST6
174	End Cover	D-JST10	Grey:100202004	L71.5/H43/W2.3 mm		Match with: JST10
175	End Cover	D-JST16	Grey:100202012	L80.2/H43.7/W2.2 mm		Match with: JST16
176	End Cover	D-JST2.5-TW	Grey:100202005	L61/H29.5/W2.2 mm		Match with: JST2.5-TW
177	End Cover	D-JST2.5-QU	Grey:100202007	L72/H29.5/W2.2 mm		Match with: JST2.5-QU
178	End Cover	D-JST4-TW	Grey:100202006	L72/H29.4/W2.2 mm		Match with: JST4-TW
179	End Cover	D-JST4-QU	Grey:100202008	L87.5/H29.6/W2.2 mm		Match with: JST4-QU
180	End Cover	D-JSTTB2.5	Grey:100202009	L68/H40/W2.2 mm		Match with: JSTTB2.5
181	End Cover	D-JSTTB4	Grey:100202013	L84.5/H40.1/W2 mm		Match with: JSTTB4
182	End Cover	D-JST2.5-3L	Grey:100202010	L99/H51/W2.2 mm		Match with: JST2.5-3L
183	End Cover	D-JDL2.5-3VN	100202011	L109.7/H57.6/W1.5 mm		Match with: JDL2.5-3VN
184	Plug-in Bridge, 2seats	FBS2-3.5	100212002	L5.7/H18.4/W3.1mm		Match With: JPT1.5/S JPT1.5/S-TW JPT1.5/S-QU JPTTB1.5/S JPTTB1.5/S-PV
185	Plug-in Bridge, 3seats	FBS3-3.5	100212003	L9.2/H18.4/W3.1mm		
186	Plug-in Bridge, 5seats	FBS5-3.5	100212005	L16.2/H18.4/W3.1mm		
187	Plug-in Bridge,10seats	FBS10-3.5	100212001	L33.7/H18.4/W3.1mm		
188	Plug-in Bridge 10 Seats	FBS10-4	100212006	L41/H22.6/W3.4 mm		Bridge for : JST1.5
189	Plug-in Bridge, 2 seats	FBS2-5	100212012	L11/H22.8/W3.1 mm		Bridge for: JST/JPT2.5 JST/JPT2.5-TW JST/JPT2.5-QU
190	Plug-in Bridge, 3 seats	FBS3-5	100212013	L14.2/H22.8/W3.1 mm		
191	Plug-in Bridge, 4 seats	FBS4-5	100212014	L20.6/H22.8/W3.1 mm		

192	Plug-in Bridge, 5 seats	FBS5-5	100212015	L24.7/H22.8/W3.1 mm		JSTTB/JPTTB2.5 JST/JPT2.5-3L
193	Plug-in Bridge, 10 seats	FBS10-5	100212011	L50.6/H22.8/W3.1 mm		
194	Plug-in Bridge, 2 seats	FBS2-6	100212017	L11/H22.8/W3.1 mm		
195	Plug-in Bridge, 3 seats	FBS3-6	100212018	L12.1/H22.8/W3.1 mm		Bridge for: JST/JPT4 JST/JPT4-TW JST/JPT4-QU
196	Plug-in Bridge, 4 seats	FBS4-6	100212019	L23.3/H22.8/W3.1 mm		
197	Plug-in Bridge, 5 seats	FBS5-6	100212020	L30.5/H22.8/W3.1 mm		
198	Plug-in Bridge, 10 seats	FBS10-6	100212016	L60.1/H22.8/W3.1 mm		
199	Plug-in Bridge, 2 seats	FBS2-8	100212022	L14.8/H30.8/W3.3 mm		Bridge for : JST/JPT6
200	Plug-in Bridge, 3 seats	FBS3-8	100212023	L23/H30.8/W3.3 mm		
201	Plug-in Bridge, 4 seats	FBS4-8	100212024	L31.2/H30.8/W3.3 mm		
202	Plug-in Bridge, 5 seats	FBS5-8	100212025	L40.5/H30.8/W3.3 mm		
203	Plug-in Bridge, 10 seats	FBS10-8	100212021	L80.4/H30.8/W3.3 mm		
204	Plug-in Bridge, 2 seats	FBS2-10	100212026	L18/H35.1/W4.2 mm		Bridge for: JST/JPT10
205	Plug-in Bridge, 2 seats	FBS2-12	100212027	L20.5/H35.8/W5.3 mm		Bridge for: JST/JPT16
206	Plug-in Bridge, 2 seats	FBS2-16	100212028	L25.4/H43.6/W5.8 mm		Bridge for: JST/JPT/JUT 35



Screw self-locking

**NEW**



**JUT Series**  
Screw self-locking  
Plug-in bridge  
High voltage capacity 1000V  
**Launching Soon**





207	Screw Terminal Block	JUT2.5	Grey:100113001	1000V/32A 0.14-4mm <sup>2</sup> /0.14-2.5mm <sup>2</sup> L47/H46.9/W5.2 mm		End cover: D-IUT2.5/10 Plug-in: FBS2-5.3-5.4-5.5-5.10-5 Marker strip: ZB5
208	Screw Terminal Block	JUT4	Grey:100113002	1000V/41A 0.14-6mm <sup>2</sup> /0.25-4mm <sup>2</sup> L47/H46.9/W6.2 mm		End cover: D-IUT2.5/10 Plug-in: FBS2-6.3-5.4-6.5-6.10-6 Marker strip: ZB6
209	<b>New</b> Screw Terminal Block	JUT6	Grey:100113003	1000V/57A 0.2-10mm <sup>2</sup> /0.25-6mm <sup>2</sup> L47/H46.9/W8.2 mm <b>Developing</b>		End cover: D-IUT2.5/10 Plug-in: FBS2-8.3-8.4-8.5-8.10-8 Marker strip: ZB8
210	<b>New</b> Screw Terminal Block	JUT10	Grey:100113004	1000V/69A 0.5-16mm <sup>2</sup> /0.5-10mm <sup>2</sup> L47/H46.9/W10.2 mm <b>Developing</b>		End cover: D-IUT2.5/10 Plug-in: FBS2-10 Marker strip: ZB10
211	<b>New</b> Screw Double Terminal Block	JUTTB2.5	Grey:100113007	1000V/32A 0.14-4mm <sup>2</sup> /0.14-2.5mm <sup>2</sup> L69.9/H64.4/W5.2 mm <b>Developing</b>		End cover: DP-IUTTB2.5/4 Plug-in: FBS2-5.3-5.4-5.5-5.10-5 Marker strip: ZB5
212	<b>New</b> Screw Double Terminal Block	JUTTB4	Grey:100113009	1000V/36A 0.14-6mm <sup>2</sup> /0.14-4mm <sup>2</sup> L69.9/H64.4/W6.2 mm <b>Developing</b>		End cover: DP-IUTTB2.5/4 Plug-in: FBS2-6.3-6.4-6.5-6.10-6 Marker strip: ZB6
213	Screw Ground Terminal Block	JUT2.5-PE	100114001	0.2-4mm <sup>2</sup> /0.2-2.5mm <sup>2</sup> L47/H48/W5.2 mm		End cover: D-IUT2.5/10 Marker strip: ZB5
214	Screw Ground Terminal Block	JUT4-PE	100114002	0.2-4mm <sup>2</sup> /0.2-2.5mm <sup>2</sup> L47/H48/W6.2 mm		End cover: D-IUT2.5/10 Marker strip: ZB6
215	<b>New</b> Screw Ground Terminal Block	JUT6-PE	100114003	0.2-10mm <sup>2</sup> /0.25-6mm <sup>2</sup> L47/H46.9/W8.2 mm <b>Developing</b>		End cover: D-IUT2.5/10 Marker strip: ZB8
216	<b>New</b> Screw Ground Terminal Block	JUT10-PE	100114004	0.5-16mm <sup>2</sup> /0.5-10mm <sup>2</sup> L47/H46.9/W10.2 mm <b>Developing</b>		End cover: D-IUT2.5/10 Marker strip: ZB10
217	<b>New</b> Screw Double Ground Terminal Block	JUTTB2.5-PE	100114007	0.14-4mm <sup>2</sup> /0.14-2.5mm <sup>2</sup> L69.9/H64.4/W5.2 mm <b>Developing</b>		End cover: D-IUTTB2.5/4 DP-IUTTB2.5/4 Marker strip: ZB5
218	<b>New</b> Screw Double Ground Terminal Block	JUTTB4-PE	100114008	0.14-6mm <sup>2</sup> /0.14-4mm <sup>2</sup> L69.9/H64.4/W6.2 mm <b>Developing</b>		End cover: D-IUTTB2.5/4 DP-IUTTB2.5/4 Marker strip: ZB6


















219	<b>NEW</b> Screw Test Terminal Block	JUT6-T-HV(P/P)	Grey:100113011	1000V/57A 0.2-10mm <sup>2</sup> /0.2-10mm <sup>2</sup> L72.6/H53.5/W8.2 mm		End cover: D-JUT6-T- HV(P/P) Plug-in: FBS2-8,3-8,4-8,5-8, 10-8
220	End cover	D-JUT2.5/10	Grey:100207001	L47/H39.7/W2.2mm		Match with terminal block: JUT2.5, JUT4, JUT6
221	End cover	D-JUTTB2.5/4	Grey:100207002	L69.9/H57.2/W2.2mm <b>Developing</b>		Match with terminal block: JUTTB2.5, JUTTB4
222	Spacer End cover	DP-JUTTB2.5/4	Grey:100207003	L69.9/H32.8/W2.5mm <b>Developing</b>		Match with terminal block: JUTTB2.5, JUTTB4
223	End cover	D-JUT6-T-HV(P/P)	Grey:100207004	L72.6/H46.9/W2.2mm		Match with terminal block: JUT6-T-HV(P/P)























### JUK Series Screw Terminal Block











1. Standard color: Gray, Black, Blue, Yellow, Green, Red.
2. Other color and Logo can be customized.
3. Products can be made with Diode.

224	Universal Terminal Blocks Color <span style="display: inline-block; width: 10px; height: 10px; background-color: gray; border: 1px solid black; border-radius: 50%;"></span> <span style="display: inline-block; width: 10px; height: 10px; background-color: blue; border: 1px solid black; border-radius: 50%;"></span>	JUK1.5N	Grey:100101001	690V/17.5A 0.14-1.5mm <sup>2</sup> /0.14-1.5mm <sup>2</sup> L42.5/H41/W4.2 mm		End cover: D-IUK1.5 Fixed bridge: JFB10-4 Insertion bridge : JEB10-4 Marker strips: ZB4
225	Universal Terminal Blocks Color <span style="display: inline-block; width: 10px; height: 10px; background-color: gray; border: 1px solid black; border-radius: 50%;"></span> <span style="display: inline-block; width: 10px; height: 10px; background-color: black; border: 1px solid black; border-radius: 50%;"></span> <span style="display: inline-block; width: 10px; height: 10px; background-color: blue; border: 1px solid black; border-radius: 50%;"></span> <span style="display: inline-block; width: 10px; height: 10px; background-color: yellow; border: 1px solid black; border-radius: 50%;"></span> <span style="display: inline-block; width: 10px; height: 10px; background-color: green; border: 1px solid black; border-radius: 50%;"></span> <span style="display: inline-block; width: 10px; height: 10px; background-color: red; border: 1px solid black; border-radius: 50%;"></span>	JUK2.5B	Grey:100101002	800V/32A 0.2-4mm <sup>2</sup> /0.2-2.5mm <sup>2</sup> L42.5/H41/W6.2 mm		End cover: D-IUK2.5 Fixed bridge: JFB10-6 Insertion bridge : JEB10-6 Marker strips: ZB6
226	Universal Terminal Blocks Color <span style="display: inline-block; width: 10px; height: 10px; background-color: gray; border: 1px solid black; border-radius: 50%;"></span> <span style="display: inline-block; width: 10px; height: 10px; background-color: blue; border: 1px solid black; border-radius: 50%;"></span>	JUK2.5N	Grey:100101052	800V/24A 0.2-4mm <sup>2</sup> /0.2-2.5mm <sup>2</sup> L42.5/H41/W5.2 mm		End cover: D-IUK2.5 Fixed bridge: JFB10-5 Insertion bridge : JEB10-5 Marker strips: ZB5
227	Universal Terminal Blocks Color <span style="display: inline-block; width: 10px; height: 10px; background-color: gray; border: 1px solid black; border-radius: 50%;"></span> <span style="display: inline-block; width: 10px; height: 10px; background-color: black; border: 1px solid black; border-radius: 50%;"></span> <span style="display: inline-block; width: 10px; height: 10px; background-color: blue; border: 1px solid black; border-radius: 50%;"></span> <span style="display: inline-block; width: 10px; height: 10px; background-color: yellow; border: 1px solid black; border-radius: 50%;"></span> <span style="display: inline-block; width: 10px; height: 10px; background-color: green; border: 1px solid black; border-radius: 50%;"></span> <span style="display: inline-block; width: 10px; height: 10px; background-color: red; border: 1px solid black; border-radius: 50%;"></span>	JUK3N	Grey:100101003	800V/32A 0.2-4mm <sup>2</sup> /0.2-2.5mm <sup>2</sup> L42.5/H46.2/W5.2 mm		End cover: D-IUK4/10 Fixed bridge: JFB10-5 Insertion bridge : JEB10-5 Marker strips: ZB5
228	Universal Terminal Blocks Color <span style="display: inline-block; width: 10px; height: 10px; background-color: gray; border: 1px solid black; border-radius: 50%;"></span> <span style="display: inline-block; width: 10px; height: 10px; background-color: black; border: 1px solid black; border-radius: 50%;"></span> <span style="display: inline-block; width: 10px; height: 10px; background-color: blue; border: 1px solid black; border-radius: 50%;"></span> <span style="display: inline-block; width: 10px; height: 10px; background-color: yellow; border: 1px solid black; border-radius: 50%;"></span> <span style="display: inline-block; width: 10px; height: 10px; background-color: green; border: 1px solid black; border-radius: 50%;"></span> <span style="display: inline-block; width: 10px; height: 10px; background-color: red; border: 1px solid black; border-radius: 50%;"></span>	JUK5N	Grey:100101004	800V/41A 0.2-6mm <sup>2</sup> /0.2-4mm <sup>2</sup> L42.5/H46.2/W6.2 mm		End cover: D-IUK4/10 Fixed bridge: JFB10-6 Insertion bridge : JEB10-6 Marker strips: ZB6
229	Universal Terminal Blocks Color <span style="display: inline-block; width: 10px; height: 10px; background-color: gray; border: 1px solid black; border-radius: 50%;"></span> <span style="display: inline-block; width: 10px; height: 10px; background-color: black; border: 1px solid black; border-radius: 50%;"></span> <span style="display: inline-block; width: 10px; height: 10px; background-color: blue; border: 1px solid black; border-radius: 50%;"></span> <span style="display: inline-block; width: 10px; height: 10px; background-color: yellow; border: 1px solid black; border-radius: 50%;"></span> <span style="display: inline-block; width: 10px; height: 10px; background-color: green; border: 1px solid black; border-radius: 50%;"></span> <span style="display: inline-block; width: 10px; height: 10px; background-color: red; border: 1px solid black; border-radius: 50%;"></span>	JUK6N	Grey:100101005	800V/57A 0.2-10mm <sup>2</sup> /0.2-6mm <sup>2</sup> L42.5/H46.2/W8.2 mm		End cover: D-IUK4/10 Fixed bridge: JFB10-8 Insertion bridge : JEB10-8 Marker strips: ZB8
230	Universal Terminal Blocks Color <span style="display: inline-block; width: 10px; height: 10px; background-color: gray; border: 1px solid black; border-radius: 50%;"></span> <span style="display: inline-block; width: 10px; height: 10px; background-color: black; border: 1px solid black; border-radius: 50%;"></span> <span style="display: inline-block; width: 10px; height: 10px; background-color: blue; border: 1px solid black; border-radius: 50%;"></span> <span style="display: inline-block; width: 10px; height: 10px; background-color: yellow; border: 1px solid black; border-radius: 50%;"></span> <span style="display: inline-block; width: 10px; height: 10px; background-color: green; border: 1px solid black; border-radius: 50%;"></span> <span style="display: inline-block; width: 10px; height: 10px; background-color: red; border: 1px solid black; border-radius: 50%;"></span>	JUK10N	Grey:100101006	800V/76A 0.5-16mm <sup>2</sup> /0.5-10mm <sup>2</sup> L42.5/H46.2/W10.2 mm		End cover: D-IUK4/10 Fixed bridge: JFB10-10 Insertion bridge : JEB10-10 Marker strips: ZB10
231	Universal Terminal Blocks Color <span style="display: inline-block; width: 10px; height: 10px; background-color: gray; border: 1px solid black; border-radius: 50%;"></span> <span style="display: inline-block; width: 10px; height: 10px; background-color: blue; border: 1px solid black; border-radius: 50%;"></span>	JUK16	Grey:100101007	800V/101A 2.5-25mm <sup>2</sup> /4-16mm <sup>2</sup> L42.5/H53/W12.2 mm		End cover: D-IUK16 Fixed bridge: JFB10-12 Insertion bridge : JEB10-12 Marker strips: ZB12
232	Universal Terminal Blocks Color <span style="display: inline-block; width: 10px; height: 10px; background-color: gray; border: 1px solid black; border-radius: 50%;"></span> <span style="display: inline-block; width: 10px; height: 10px; background-color: blue; border: 1px solid black; border-radius: 50%;"></span>	JUK25	Grey:100101008	800V/101A 2.5-35mm <sup>2</sup> / 2.5-25mm <sup>2</sup> L42.5/H46.2/W14.2 mm		End cover: D-IUK4/10 Fixed bridge: JFB10-14 Marker strips: ZB12
233	Universal Terminal Blocks Color <span style="display: inline-block; width: 10px; height: 10px; background-color: gray; border: 1px solid black; border-radius: 50%;"></span> <span style="display: inline-block; width: 10px; height: 10px; background-color: blue; border: 1px solid black; border-radius: 50%;"></span>	JUK35	Grey:100101009	1000V/150A 0.75-50mm <sup>2</sup> /0.75-35mm <sup>2</sup> L51/H62/W15.2 mm		Fixed bridge: JFB10-15 Insertion bridge : JEB10-15 Marker strips: ZB12
234	Installation Universal Terminal Blocks Color <span style="display: inline-block; width: 10px; height: 10px; background-color: gray; border: 1px solid black; border-radius: 50%;"></span> <span style="display: inline-block; width: 10px; height: 10px; background-color: black; border: 1px solid black; border-radius: 50%;"></span> <span style="display: inline-block; width: 10px; height: 10px; background-color: blue; border: 1px solid black; border-radius: 50%;"></span> <span style="display: inline-block; width: 10px; height: 10px; background-color: yellow; border: 1px solid black; border-radius: 50%;"></span> <span style="display: inline-block; width: 10px; height: 10px; background-color: green; border: 1px solid black; border-radius: 50%;"></span> <span style="display: inline-block; width: 10px; height: 10px; background-color: red; border: 1px solid black; border-radius: 50%;"></span>	JUIK16	Grey:100101010	800V/101A 0.25-25mm <sup>2</sup> /4-16mm <sup>2</sup> L42.5/H46.2/W12.2 mm		End cover: D-IUK4/10 Fixed bridge: JFB10-12 Insertion bridge : JEB10-12 Marker strips: ZB12
235	Installation Universal Terminal Blocks Color <span style="display: inline-block; width: 10px; height: 10px; background-color: gray; border: 1px solid black; border-radius: 50%;"></span> <span style="display: inline-block; width: 10px; height: 10px; background-color: blue; border: 1px solid black; border-radius: 50%;"></span>	JUIK35	Grey:100101011	800V/125A 0.75-35mm <sup>2</sup> /0.75-35mm <sup>2</sup> L56/H51/W15.2 mm		Fixed bridge: JFB10-15 Marker strip: ZB12
236	Installation Universal Terminal Blocks (Hex Scket) Color <span style="display: inline-block; width: 10px; height: 10px; background-color: gray; border: 1px solid black; border-radius: 50%;"></span> <span style="display: inline-block; width: 10px; height: 10px; background-color: blue; border: 1px solid black; border-radius: 50%;"></span>	JUT35	Grey:100101012	1000V/125A 35mm <sup>2</sup> L65.3/H60.9/W15.9 mm		Plug-in bridge: FBS2-16 Marker strip: ZB10
237	Ground Terminal Blocks (Hex Scket Screw)	JUT35-PE	100102011	35mm <sup>2</sup> L65.3/H60.9/M15.9 mm		Marker strip: ZB10
238	Universal Ground Terminal Blocks	JUSLKG2.5N	100102001	0.2-4mm <sup>2</sup> /0.2-2.5mm <sup>2</sup> L42.5/H41/W6.2 mm		Marker strip: ZB6









239	Universal Ground Terminal Blocks	JUSLKG3N	100102002	0.2-4mm <sup>2</sup> /0.2-2.5mm <sup>2</sup> L42.5/H46.2/W5.2 mm		Marker strip: ZB5
240	Universal Ground Terminal Blocks	JUSLKG5N	100102003	0.2-6mm <sup>2</sup> /0.2-4mm <sup>2</sup> L42.5/H46/W6.2 mm		Marker strip: ZB6
241	Universal Ground Terminal Blocks	JUSLKG6N	100102004	0.2-10mm <sup>2</sup> /0.2-6mm <sup>2</sup> L42.5/H46/W8.2 mm		Marker strip: ZB8
242	Universal Ground Terminal Blocks	JUSLKG10N	100102005	0.5-16mm <sup>2</sup> /0.5-10mm <sup>2</sup> L42.5/H45/W10.2 mm		Marker strip: ZB10
243	Universal Ground Terminal Blocks	JUSLKG16N	100102006	2.5-25mm <sup>2</sup> /4-16mm <sup>2</sup> L42.5/H53/W12.2 mm		Marker strip: ZB12
244	Universal Ground Terminal Blocks	JUSLKG35	100102007	0.75-50mm <sup>2</sup> /0.75-35mm <sup>2</sup> L51/H61/W16.2 mm		Marker strip: ZB12
245	Universal Ground Terminal Blocks	JUISLKG16	100102008	2.5-25mm <sup>2</sup> /4-16mm <sup>2</sup> L42.5/H46.2/W12.2 mm		Marker strip: ZB10
246	Universal Ground Terminal Blocks	JUISLKG35	100102009	0.75-35mm <sup>2</sup> /0.75-35mm <sup>2</sup> L56/H50.2/W15.2mm		Marker strip: ZB12
247	Universal Ground Terminal Blocks	JUSLKG50	100102010	16-50mm <sup>2</sup> /25-50mm <sup>2</sup> L71.2/H77/W20 mm		Marker strip: ZB10
248	 Universal Ground Terminal Blocks	JUSLKG95	100102013	25-95mm <sup>2</sup> /35-95mm <sup>2</sup> L83/H90.5/W25 mm		Marker strip: ZB12
249	Universal High-current Terminal Block Color  	JUKH50	Grey:100101013	1000V/150A 16-50mm <sup>2</sup> /25-50mm <sup>2</sup> L71.5/H72/W20 mm		Fixed bridge: JEB12-20, 3-20 Marker strip: ZB10
250	Universal High-current Terminal Block Color  	JUKH95	Grey:100101014	1000V/232A 25-95mm <sup>2</sup> /35-95mm <sup>2</sup> L83/H90.5/W25 mm		Insertion bridge: JEB2-25, JEB3- 25 Marker strip: ZB10
251	Universal High-current Terminal Block Color  	JUKH150	Grey:100101015	1000V/309A 35-150mm <sup>2</sup> /50-150mm <sup>2</sup> L101/H112/W31 mm		Insertion bridge: JEB2-31 Marker strip: ZB10
252	Universal High-current Terminal Block Color  	JUKH240	Grey:100101016	1000V/415A 70-240mm <sup>2</sup> /70-240mm <sup>2</sup> L101/H126/W37 mm		Marker strip: ZB10
253	Twin Conductor Terminal Blocks	JUK5-TWIN	Grey:100101017	500V/32*A 0.2-4mm <sup>2</sup> /0.2-4mm <sup>2</sup> L50.5/H46.2/W6.2 mm		End cover: D-IUK5-TWIN Fixed bridge: JFB10-6 Insertion bridge: JEB10-6 Marker strips: ZB6
254	Double Terminal Blocks	JUDK4	Grey:100101018	690V/32*A 0.2-4mm <sup>2</sup> /0.2-4mm <sup>2</sup> L64/H46.2/W6.2 mm		End cover: D-IUDK4 Fixed bridge: JFB10-6 Insertion bridge: JEB10-6 Marker strips: ZB6
255	Double Terminal Blocks	JUDK10	Grey:100101047	690V/57*A 0.2-16mm <sup>2</sup> /0.2-10mm <sup>2</sup> L64.9/H56.7/W10.2 mm		End cover: D-IUDK10 Fixed bridge: JFB10-10 Insertion bridge: JEB10-10 Marker strips: ZB10
256	Double Level Terminal Blocks Color   	JMBKKB2.5	Grey:100101019	500V/32A 0.2-4mm <sup>2</sup> /0.2-2.5mm <sup>2</sup> L62.5/H47.5/W5.2 mm		End cover: D-JMBKKB2.5 Fixed bridge: JFB10-5N Insertion bridge: JEB10-5 Marker strips: ZB5
257	Double Level Terminal Blocks, with equipotential bonder Color   	JMBKKB2.5-PV	Grey:100101020	500V/32A 0.2-4mm <sup>2</sup> /0.2-2.5mm <sup>2</sup> L62.5/H47.5/W5.2 mm		End cover: D-JMBKKB2.5 Fixed bridge: JFB10-5N Insertion bridge: JEB10-5 Marker strips: ZB5
258	Double Level Terminal Blocks	JUKKB3	Grey:100101021	500V/32A 0.2-4mm <sup>2</sup> /0.2-2.5mm <sup>2</sup> L68/H62/W5.2 mm		End cover: D-IUKKB3/5 Fixed bridge: JFB10-5 Insertion bridge: JEB10-5 Marker strips: ZB5
259	Double Level Terminal Blocks	JUKKB5	Grey:100101022	500V/32A 0.2-4mm <sup>2</sup> /0.2-4mm <sup>2</sup> L68/H62/W6.2 mm		End cover: D-IUKKB3/5 Fixed bridge: JFB10-6 Insertion bridge: JEB10-6 Marker strip: ZB6
260	Double Level Terminal Blocks	JUKK3	Grey:100101023	500V/32A 0.2-4mm <sup>2</sup> /0.2-2.5mm <sup>2</sup> L57/H62/W5.2 mm		End cover: D-IUKK3/5 Fixed bridge: JFB10-5 Insertion bridge: JEB10-5 Marker strip: ZB5
261	Double Level Terminal Blocks	JUKK5	Grey:100101024	500V/32A 0.2-4mm <sup>2</sup> /0.2-4mm <sup>2</sup> L57/H62/W6.2 mm		End cover: D-IUKK3/5 Fixed bridge: JFB10-6 Insertion bridge: JEB10-6 Marker strip: ZB6





















262	Double Level Terminal Blocks, with equipotential bonder	JUKK5-PV	Grey:100101025	500V/32A 0.2-4mm <sup>2</sup> /0.2-4mm <sup>2</sup> L57/H62/W6.2 mm		End cover: D-IJUKK3/5 Fixed bridge: JEB10-6 Insertion bridge: JEB10-6 Marker strip: ZB6
263	<b>new</b> Double Level Ground Terminal Blocks	JUKK5-PE	Grey:100102012	0.2-4mm <sup>2</sup> /0.2-4mm <sup>2</sup> L57/H62/W6.2 mm		Marker strip: ZB6
264	Three Level Terminal Blocks	JDIKD1.5	Grey:100101026	250V/30A 0.2-4mm <sup>2</sup> /0.2-2.5mm <sup>2</sup> L73/H54.5/W6.2 mm		Bridge: JEB10-6, JFB10-6 80 seats bridge: EB80-DIK can be cut into different seats. Marker strip: ZB6
265	Three Level Terminal Blocks, With equipotential bonder	JDIKD1.5-PV	Grey:100101046	250V/30A 0.2-4mm <sup>2</sup> /0.2-2.5mm <sup>2</sup> L73/H54.5/W6.2 mm		Bridge: JEB10-6, JFB10-6 80 seats bridge: EB80-DIK can be cut into different seats. Marker strip: ZB6
266	Fuse Terminal Blocks With Disconnect Lever Color  	JUK5-HESI Grey/Black	Grey:100101027	800V/6.3A 0.2-4mm <sup>2</sup> /0.2-4mm <sup>2</sup> L73.5/H56.5/W8.2 mm		Insertion bridge: JEB10-8 Marker strip: ZB 8 Fuse size: 5*25mm
267	Fuse Terminal Blocks With Disconnect Lever with LED Color  	JUK5-HESILED Grey/Black	24V Grey: 100101028 220V Grey: 100101058	800V/6.3A 0.2-4mm <sup>2</sup> /0.2-4mm <sup>2</sup> L73.5/H56.5/W8.2 mm		Insertion bridge: JEB10-8 Marker strip: ZB 8 <u>With LED Light:</u> <u>220V, 110V, 24V</u> Fuse size: 5*25mm
268	Fuse Terminal Blocks With Screw Cap Color  	JUK10-DREHSI	Grey:100101029	800V/10A 0.5-16mm <sup>2</sup> /0.5-16mm <sup>2</sup> L62.5/H56.5/W12mm		Fixed bridge: JFB10-12 Marker strip: ZB 8 Fuse size: 5*20mm
269	Fuse Terminal Blocks With Screw Cap, with LED Color  	JUK10-DREHSILED	24V Grey: 100101030 220V Grey: 100101059	800V/10A 0.5-16mm <sup>2</sup> /0.5-16mm <sup>2</sup> L62.5/H56.5/W12mm		Fixed bridge: JFB10-12 Marker strip: ZB 8 <u>With LED Light: 220V, 24V</u> Fuse size: 5*20mm
270	Knife Disconnect Terminal Blocks	JUK5-MTK-P/P	Grey:100101031	500V/20A 0.2-4mm <sup>2</sup> /0.2-4mm <sup>2</sup> L51/H46.5/W6.2mm		Insertion bridge: JEB10-6 Marker strip: ZB6
271	Knife Disconnect Terminal Blocks	JUDK4-MTK	Grey:100101048	500V/20A 0.2-6mm <sup>2</sup> /0.2-4mm <sup>2</sup> L64/H46.2/W6.2 mm		End cover: D-IJUDK4 Insertion bridge: JEB10-6 Marker strips: ZB6
272	Simple Test Disconnect Terminal Blocks	JERTK/S	Grey:100101032	400V/57A 0.5-10mm <sup>2</sup> /0.5-6mm <sup>2</sup> L72.5/H51/W8.2mm		End cover: D-IJURTK Fixed bridge: JFB10-URTK/S Insertion bridge: JEB10-8 Marker strip: ZB 8
273	Simple Test Disconnect Terminal Blocks	JURTK/S	Grey:100101033	400V/57A 0.5-10mm <sup>2</sup> /0.5-6mm <sup>2</sup> L72.5/H51/W8.2mm		End cover: D-IJURTK Fixed bridge: JFB10-URTK/S Insertion bridge: JEB10-8 Marker strip: ZB 8
274	<b>new</b> Mini Screw Terminal Block For 15mm DIN Rail	JMBK3/E-Z	Grey:100101049	500V/32A 2.5mm <sup>2</sup> L30.2/H26.6/W5.2mm		End cover: D-IMBK3/E Fixed bridge: JFB10-5 Insertion bridge: JEB10-5 Marker strip: ZB5
275	End cover	D-JMBK/E	Grey:100201017	L30.2/H26.1/W1mm		Match with: JMBK3/E-Z
276	UK Separating Plates	TS-KK3	Grey:100201014	L16/H14/W1mm		For JUK2.5B
277	TS-K	TS-K	Grey:100201015	L22/H22.5/W1mm		For most types UK models
278	Partition Plate	ATP-JUK	Grey:100201013	L57.5/H47/W1.5mm		For UK series Only
279	End Cover	D-JUK1.5	Grey:100201001	L42.5/H31/W1.5mm		Match with terminal block: JUK1.5N
280	End Cover	D-JUK2.5	Grey:100201002	L42.5/H31/W1.5mm		Match with terminal block: JUK2.5B
281	End Cover	D-JUK4/10	Grey:100201003	L42.5/H36.2/W1.8mm		Match with terminal block: JUK3N, JUK5N, JUK6N JUK10N, JUK16
282	End Cover	D-JUK16	Grey:100201004	L42.5/H43/W1.5mm		Match with terminal block: JUK16
283	End Cover	D-JUK5-TWIN	Grey:100201005	L50.5/H34.5/W1.5		Match with terminal block: JUK-5TWIN

284	End Cover	D-JUDK4	Grey:100201006	L64/H36.2/W1.7		Match with terminal block: JUDK4
285	End Cover	D-JUDK10	Grey:100201016	L63.5/H35.9/W1.5		Match with terminal block: JUDK10
286	End Cover	D-JMBKKB2.5	Grey:100201007	L62.5/H40/W2.6		Match with terminal block: JMBKKB2.5
287	End Cover	D-JUKKB3/5	Grey:100201008	L68/H52.2/W2.6 mm		Match with terminal block: JUKKB3, JUKKB5
288	Spacer End Cover	DP-JUKKB3/5	Grey:100201009	L68/H25/W2.5 mm		Match with terminal block: JUKKB3, JUKKB5
289	End Cover	D-JUKK3/5	Grey:100201010	L57/H52.2/W5 mm		Match with terminal block: JUKK3, JUKK5
290	End Cover	DG-JUKK3/5	Grey:100201018	L57/H52.2/W5 mm		Match with terminal block: JUKK3, JUKK5
291	End Cover	DP-JUKK3/5	Grey:100201011	L57/H25/W2.5 mm		Match with terminal block: JUKK3, JUKK5
292	End Cover	D-JURTK/S	Grey:100201012	L72.5/H42/W1.7 mm		Match with terminal block: JURTK/S
293	Fixed Bridge	JFBRNI10-5N	100211001	L41.8/H10/W4.7 mm		For JMBKKB2.5 Can cut into different seats
294	Fixed Bridge	JFBI10-4	100211002	L41.8/H10/W4.7 mm		For JUK1.5N Can cut into different seats
295	Fixed Bridge, 10 seats	JFBI10-5	100211003	L51.2/H15.8/W5 mm		For JUK3N,
296	Fixed Bridge, 2 seats	JFBI2-5	100211004	L10.3/H15.8/W5 mm		
297	Fixed Bridge, 3 seats	JFBI3-5	100211005	L15.4/H15.8/W5 mm		
298	Fixed Bridge, 4 seats	JFBI4-5	100211006	L20.4/H15.8/W5 mm		
299	Fixed Bridge, 10 seats	JFBI10-6	100211012	L59.8/H9.5/W5.9 mm		
300	Fixed Bridge, 2 seats	JFBI2-6	100211013	L10.6/H9.5/W5.9 mm		For JUK2.5B, JUK5N JUDK4
301	Fixed Bridge, 3 seats	JFBI3-6	100211014	L16.9/H9.5/W5.9 mm		
302	Fixed Bridge, 4 seats	JFBI4-6	100211015	L23/H9.5/W5.9 mm		
303	Fixed Bridge, 10 seats	JFBI10-8	100211021	L80.7/H7.7/W6.7 mm		
304	Fixed Bridge, 2 seats	JFBI2-8	100211022	L14/H7.7/W6.7 mm		
305	Fixed Bridge, 3 seats	JFBI3-8	100211023	L22.2/H7.7/W6.7 mm		For JUK6N,
306	Fixed Bridge, 4 seats	JFBI4-8	100211024	L30.5/H7.7/W6.7 mm		
307	Fixed Bridge	JFBI10-10	100211030	L99.5/H7.8/W7.9 mm		
308	Fixed Bridge	JFBI10-12	100211039	L116.5/H8.0/W7.9 mm		For JUK10N, Can cut into different seats
309	Fixed Bridge	JFBI10-14	100211044			For JUK16, JUK16 Can cut into different seats
310	Fixed Bridge	JFBI10-15	100211049	L148/H12/W10.9 mm		For JUK25 Can cut into different seats
311		JFBI2-15	100211050	L26.3/H12/W10.9 mm		
312		JFBI3-15	100211051	L41.5/H12/W10.9 mm		
313	Fixed Bridge	JFBI2-20	100211054	L36.6/H13.3/W13.8 mm		For JUK35, JUK35 Can cut into different seats
314	Fixed Bridge	JFBI3-20	100211055	L57.4/H13/W14 mm		For JUKH50
315	Fixed Bridge	JFBI10-URTK/S	100211056	L79.3/H10.1/W3.5 mm		For JUKH50
316	Insertion Bridge	JEB10-5	100211065	L51/H20.8 mm		For JURTK/S Can cut into different seats
317		JEB2-5	100211066	L10/H20.8 mm		
318		JEB3-5	100211067	L12.6/H20.8 mm		
319		JEB4-5	100211068	L17.8/H20.8 mm		
320	Insertion Bridge	JEB10-6	100211070	L61/H22 mm		For JUK6N,
321		JEB2-6	100211071	L10.3/H22 mm		
322		JEB3-6	100211072	L16.7/H22 mm		
323		JEB4-6	100211073	L23/H22 mm		
324	Insertion Bridge	JEB10-8	100211075	L80.1/H24.9 mm		For JUK2.5B, JUK5N,
325		JEB2-8	100211076	L13.6/H24.9 mm		

326		JEB3-8	100211077	L21.2/H24.9 mm				
327	Insertion Bridge	JEB10-10	100211078	L98.7/H28.1 mm		For JUK10N,		
328		JEB3-10	100211080	L26.8/H28.1 mm				
329		JEB2-10	100211079	L12.8/H28.1 mm				
330	Insertion Bridge	JEB10-12	100211103			For JUK16, JUIK16		
331	Insertion Bridge	JEB10-15	100211104			For JUK35, JUIK35		
332	Insertion Bridge	JEB2-25	100211105			For JUKH95		
333		JEB3-25	100211106					
334	Insertion Bridge	JEB2-31	100211107			For JUKH150		
335	Insertion Bridge for JDIKD 1.5 80 Seats, can cut into different seats Color 	JEB80-DIK	100211081	H10.9mm x 3.6		\$0.113 for 1 seat, apply from 2 seats ~ 80 seats		
336	Blank Marker Strips Unit price for 10 seats/strip (Suitable for JPT, JUK, JST Series)	ZB3.5	100222001			For JPT series, 1.5mm <sup>2</sup>		
337		ZBFM3.5, ZBFM5, ZBFM6	100222019 100222022 100222025			For 1.5, 2.5, 4mm <sup>2</sup> JST/JPT side		
338		ZB4	100222004	Lettering field : 4.5x8.5mm		For thickness 4.2mm		
339		ZB5	100222007	Lettering field : 4.7*10.5mm		For thickness 5.2mm		
340		ZB6	100222010	Lettering field : 6*10.5mm		For thickness 6.2mm		
341		ZB8	100222013	Lettering field : 7.2*10.4mm		For thickness 8.2mm		
342		ZB10	100222016	Lettering field : 9.3*10.7mm		For thickness 10.2mm		
343		ZB12	100222034					
344		Marker Strips with numbering: 1-10,11-20,...,91-100 Unit price for 10 seats/strip (Suitable for JPT, JUK, JST Series)	ZB3.5	100222002				For JPT series, 1.5mm <sup>2</sup>
345			ZBFM3.5, ZBFM5, ZBFM6	100222020 100222023 100222026				For 1.5, 2.5, 4mm <sup>2</sup> JST/JPT side
346	ZB4		100222005	Lettering field : 4.5x8.5mm	For thickness 4.2mm			
347	ZB5		100222008	Lettering field : 4.7*10.5mm	For thickness 5.2mm			
348	ZB6		100222011	Lettering field : 6*10.5mm	For thickness 6.2mm			
349	ZB8		100222014	Lettering field : 7.2*10.4mm	For thickness 8.2mm			
350	ZB10		100222017	Lettering field : 9.3*10.7mm	For thickness 10.2mm			
351	ZB12		100222035					
352	Marker Strips with customized numbering Unit price for 10 seats/strip (Suitable for JPT, JUK, JST Series)		ZB3.5	100222003		With customized wording		
353			ZBFM3.5, ZBFM5, ZBFM6	100222021 100222024 100222027				For 1.5, 2.5, 4mm <sup>2</sup> JST/JPT side
354		ZB4, ZB5, ZB6, ZB8, ZB10	100222006 100222009 100222012 100222015 100222018					
355		ZB12	100222036					



356	Spring-cage Terminal Blocks	280-101	Grey:100109014	800V/24A 0.08-2.5mm <sup>2</sup> L42/H35.5/W5 mm		End cover: 280-301 Adjacent bridge: 280-402 Alternate bridge: 280-409 Marker strip: WSB
357	Spring-cage Ground Terminal Blocks	280-107	100110010	800V/24A 0.08-2.5mm <sup>2</sup> L42/H35/W5 mm		End cover: 280-301 Marker strip: WSB
358	Spring-cage Terminal Blocks	281-101	Grey:100109015	800V/32A 0.08-4mm <sup>2</sup> L42/H37.5/W6 mm		End cover: 281-301 Adjacent bridge: 281-402 Alternate bridge: 281-409 Marker strip: WSB
359	Spring-cage Ground Terminal Blocks	281-107	100110011	800V/32A 0.08-4mm <sup>2</sup> L45/H40/W6 mm		End cover: 281-301 Marker strip: WSB
360	Spring-cage Terminal Blocks	282-101	Grey:100109016	800V/41A 0.2-6mm <sup>2</sup> L46.2/H42/W8 mm		End cover: 282-301 Adjacent bridge: 282-402 Marker strip: WSB
361	Mini Terminal Blocks	260-301	Grey:100109018	400V/18A 0.08-1.5mm <sup>2</sup> L25.5/H17.5/W5 mm		End cover: 260-361 Bridge: 260-402
362	Mini Terminal Blocks	261-301	Grey:100109019	500V/24A 0.08-2.5mm <sup>2</sup> L28.5/H18.3/W6 mm		End cover: 261-361 Bridge: 261-402 Another type 261-301-M use with marker strip "DEK 6"
363	Mini Terminal Blocks (Four conductor)	261-331	Grey:100109020	500V/24A 0.08-2.5mm <sup>2</sup> L28.5/H18.3/W12 mm		End cover: 261-361 Bridge: 261-402


364	Mini Terminal Blocks	262-301	Grey:100109021	630V/24A 0.08-4mm <sup>2</sup> L33.5/H23.2/W7 mm		End cover: 262-361
						Bridge: 262-402
365	End Cover for Mini Terminal Blocks	260-361	100205017	L25.5/H17.5/W2.5 mm		For 260-301
366	End Cover for Mini Terminal Blocks	261-361	100205019	L28.3/H18.2/W2.5mm		For 261-301 261-331
367	End Cover for Mini Terminal Blocks	262-361	100205021	L33.5/H23.2/W7 mm		For 262-301
368	Mini Terminal Blocks	260-301B	100109022	400V/18A 0.08-1.5mm <sup>2</sup> L25.2/H22/W5 mm		End cover: 260-361B
369	Mini Terminal Blocks	261-301B	100109023	500V/24A 0.08-2.5mm <sup>2</sup> L28.2/H23/W6 mm		End cover: 261-361B
						Marker strip: DEK 6
370	End Cover for Mini Terminal Blocks	260-361B	100205018	L25.5/H22/W2.5 mm		For 260-301B
371	End Cover for Mini Terminal Blocks	261-361B	100205020	L28.3/H23/W2.5 mm		For 261-301B
372	Mounting Foot With Screw	209-123	100223006	L42/H11 mm		Holder for 260,261,262 series
373	Bridge	W260-402	100214007			For 260-301
374		W261-402	100214008			For 261-301
375		W262-402				For 262-301
376	End Cover	280-301	100205013	L42/H30.5/W2.2 mm		Match with terminal block: 280-101
377	End Cover	281-301	100205014	L40/H32.5/W3 mm		Match with terminal block: 281-101
378	End Cover	282-301	100205015	L46.2/H37/W4 mm		Match with terminal block: 282-101
379	Adjacent Bridge	W279-402				For 279 series
380	Adjacent Bridge	W280-402	100214001	L8.1/H21.8/W5.0 mm		For 280 series
381	Alternate Bridge	W280-409	100214005	L10/H22.2/W8.3 mm		
382	Adjacent Bridge	W281-402	100214002	L6.1/H24.1/W8.4 mm		For 281 series
383	Alternate Bridge	W281-409	100214006	L12/H24.2/W8.2 mm		
384	Adjacent Bridge	W282-402	100214003	L8.0/H25.2/W8.4 mm		For 282 series
385	Adjacent Bridge	W284-402	100214004	L9.5/H25.5/W9.1 mm		For 284 series
386	Blank Marker Strips Unit price for 10 seats	WSB	100222031	Lettering field : 4.6x9 mm		
387	Marker Strips with numbering: 1-10,11-20,...,91-100 Unit price for 10 seats	WSB	100222032	Lettering field : 4.6x9 mm		
388	Marker Strips with customized numbering, Unit price for 10 seats	WSB	100222033	Lettering field : 4.6x9 mm		
						For all Wago Series






### JSAK Series, Screw Connection Terminal Block

1. Standard color: Beige, Blue, Gray(JXB Series).
2. Other color and Logo can be customized.
3. Products can be made with Diode.

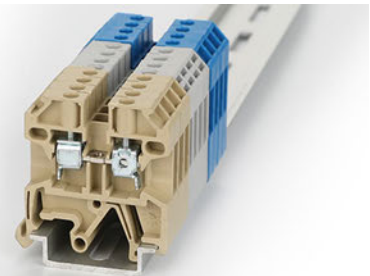





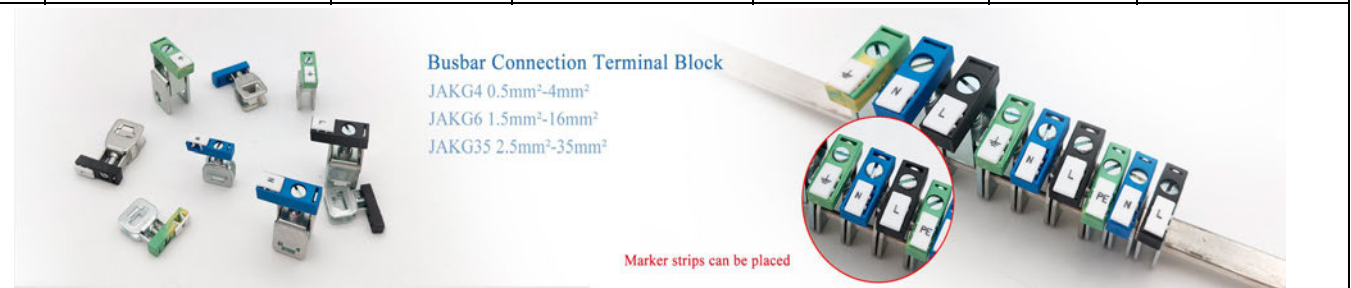



389	Universal Terminal Blocks Color 	JSAK2.5EN	Beige:100107001	800V/24A Cross section: 2.5mm <sup>2</sup> L41/H41/W6 mm		End cover: AP2.5 Fixed bridge: JSAK2.5Q10 Marker strip: DEK6
390	Universal Terminal Blocks Color 	JSAK4EN	Beige:100107002	800V/32A Cross section: 4mm <sup>2</sup> L42/H46.5/W6.5 mm		End cover: AP4/10 Fixed bridge: JSAK4Q10 Marker strip: DEK6
391	Universal Terminal Blocks Color 	JSAK6EN	Beige:100107003	800V/41A Cross section: 6mm <sup>2</sup> L42/H46.5/W8 mm		End cover: AP4/10 Fixed bridge: JSAK6Q10 Marker strip: DEK6
392	Universal Terminal Blocks Color 	JSAK10EN	Beige:100107004	800V/57A Cross section: 10mm <sup>2</sup> L42/H46.5/W10 mm		End cover: AP4/10 Fixed bridge: JSAK10Q10 Marker strip: DEK6
393	Universal Terminal Blocks Color 	JSAK16EN	Beige:100107005	800V/76A Cross section: 16mm <sup>2</sup> L50/H51.5/W12 mm		End cover: AP16 Fixed bridge: JSAK16Q10 Marker strip: DEK6
394	Universal Terminal Blocks Color 	JSAK25EN	Beige:100107006	800V/76A Cross section: 25mm <sup>2</sup> L50/H53/W20 mm		End cover: AP16 Marker strip: DEK6
395	Universal Terminal Blocks Color 	JSAK35EN	Beige:100107007	800V/125A Cross section: 35mm <sup>2</sup> L58/H62/W18 mm		End cover: AP35 Fixed bridge: JSAK35Q10 Marker strip: DEK6
396	Universal Terminal Blocks Color 	JSAK70/35	Beige:100107008	800V/192A Cross section: 70mm <sup>2</sup> L76/H79/W22 mm		End cover: AP 70 Marker strip: DEK6
397	Universal Terminal Blocks Color 	JDK4Q/35	Beige:100107009	500V/32A Cross section: 4mm <sup>2</sup> L55.5/H56/W6 mm		End cover: AP-DK40 Fixed bridge: JDK4Q10 Marker strip: DEK6
398	Universal Terminal Blocks Color 	JDK4QV/35	Beige:100107010	500V/32A Cross section: 4mm <sup>2</sup> L55.5/H56/W7 mm		End cover: AP-DK40 Fixed bridge: JDK4Q10 Marker strip: DEK6
399	Testing Terminal Blocks Color 	JWTL6/1S	Beige:100107011	400V/41A Cross section: 6mm <sup>2</sup> L66/H52/W8 mm		End cover: AP-WTL6/1 Fixed bridge: JSAK6Q10 Marker strip: DEK6
400	Fuse Terminal Blocks Color 	JASK1EN	Beige:100107012	660V/6.3A Cross section: 4mm <sup>2</sup> L58.5/H42/W8 mm		End cover: AP-ASK1 Marker strip: DEK6 Fuse size: 5*20mm
401	Fuse Terminal Blocks With LED Color 	JASK1ENLED	24V Beige:100107013 220V Beige:100107015	660V/6.3A Cross section: 4mm <sup>2</sup> L58.5/H42/W8 mm		End cover: AP-ASK1 Marker strip: DEK6 With LED light, 220V, 24V Fuse size: 5*20mm
402	Universal Ground Terminal Blocks	JEK2.5/35	100108001	Cross section: 2.5mm <sup>2</sup> L57/H37/W6 mm		Marker strip: DEK6
403	Universal Ground Terminal Blocks	JEK4/35	100108002	Cross section: 4mm <sup>2</sup> L57.5/H41/W6.5 mm		Marker strip: DEK6
404	Universal Ground Terminal Blocks	JEK6/35	100108003	Cross section: 6mm <sup>2</sup> L57.5/H41/W8 mm		Marker strip: DEK6
405	Universal Ground Terminal Blocks	JEK10/35	100108004	Cross section: 10mm <sup>2</sup> L57.5/H41/W10 mm		Marker strip: DEK6
406	Universal Ground Terminal Blocks	JEK16/35	100108005	Cross section: 16mm <sup>2</sup> L58/H47/W12 mm		Marker strip: DEK6
407	Universal Ground Terminal Blocks	JEK35/35	100108006	Cross section: 35mm <sup>2</sup> L59/H57/W16.2 mm		Marker strip: DEK6
408	Marker Carrier Color 	JB1 Beige	100221002	L45/41/H47/W9.5 mm		

409	End Cover, SAK Color	AP2.5	Beige:100204001	L40/H31.5/W1.5 mm		Match with terminal block: JSAK2.5EN
410	End Cover, SAK Color	AP4/10	Beige:100204002	L40/H37.2/W1.5 mm		Match with terminal block: JSAK4EN JSAK6EN JSAK10EN
411	End Cover, SAK Color	AP16	Beige:100204003	L50.5/H35/W1.7 mm		Match with terminal block: JSAK16EN
412	End Cover, SAK Color	AP35	Beige:100204004	L59/H47/W1.9 mm		Match with terminal block: JSAK35EN
413	End Cover, SAK Color	AP70	Beige:100204005	L71.5/H66.5/W2 mm		Match with terminal block: JSAK 70/35
414	End Cover, SAK Color	AP-DK4Q	Beige:100204006	L54.7/H40/W1.5 mm		Match with terminal block: JDK4Q/35 JDK4QV/35
415	End Cover, SAK Color	AP-WTL6/1	Beige:100204007	L66/H36/W1.8 mm		Match with terminal block: JWTL6/1S
416	End Cover, SAK Color	AP-ASK1	Beige:100204008	L52.4/H24/W1.5 mm		Match with terminal block: JASK1EN
417	Fixed Bridge	JSAK2.5Q10	100213001	L59.2/H15.8 mm		For JSAK2.5EN Can cut into different seats
418	Fixed Bridge	JSAK4Q10	100213007	L64.1/H21.9 mm		For JSAK4EN Can cut into different seats
419	Fixed Bridge	JSAK6Q10	100213012	L77.1/H21.9 mm		For JSAK6EN Can cut into different seats
420	Fixed Bridge	JSAK10Q10	100213015	L92/H21.9 mm		For JSAK10EN Can cut into different seats
421	Fixed Bridge	JSAK16Q10	100213016	L116/H21.9 mm		For JSAK16EN Can cut into different seats
422	Fixed Bridge	JSAK35Q10	100213017	L173/H33.4 mm		For JSAK35EN Can cut into different seats
423	Fixed Bridge	JDK4Q10	100213018	L62/H10.6 mm		For JDK4Q/35, JDK4QV/35 Can cut into different seats
424	Blank Marker Strips Unit price for 10 seats	DEK6	100222028	Lettering field : 5x6 mm		For all SAK Series
425	Marker Strips with numbering: 1-10,11-20,....,91-100 Unit price for 10 seats	DEK6	100222029	Lettering field : 5x6 mm		
426	Marker Strips with customized numbering, Unit price for 10 seats	DEK6	100222030	Lettering field : 5x6 mm		



427	Busbar Connection Terminal Block Blue,Black,Yellow/Green Marker Strip: ZB 5	JAKG4	Black:100701001	300V/41A 0.5-6mm²/0.5-4mm² For 3*10mm,6*6mm busbar		ZB5
428			Blue:100701001BU			
429			Yellow/green:100701001PE			
430	Busbar Connection Terminal Block Blue,Black,Yellow/Green Marker Strip: ZB 6	JAKG16	Black:100701002	300V/76A 1.5-16mm²/1.5-16mm² For 3*10mm,6*6mm busbar		ZB6
431			Blue:100701002BU			
432			Yellow/green:100701002PE			
433	Busbar Connection Terminal Block Blue,Black,Yellow/Green Marker Strip: ZB 8	JAKG35	Black:100701003	300V/125A 2.5-35mm²/2.5-35mm² For 3*10mm,6*6mm busbar		ZB8
434			Blue:100701003BU			
435			Yellow/green:100701003PE			
436	Tin Plated Neutral busbar	CU3*10*1000mm	100701004	3*10mm, 1 Meter		Other size car be customizec

437	One Layer Holder for Busbar, clamp direct type	JAB/SS	100702001	Suitable for 3*10mm, 6*6mm busbar		
438	One Layer Holder for Busbar, screw tighten type	JAB/SS-2	100702002	Suitable for 3*10mm, 6*6mm busbar		
439	Double Layers Holder for Busbar	JAB/2SS	100702003	Suitable for 3*10mm, 6*6mm busbar		
440	Triple Layers Holder for Busbar	JAB/3SS	100702004	Suitable for 3*10mm, 6*6mm busbar		



441	<b>new</b> 15mm wide Color Galvanized Steel DIN Rail	NS15-S-1.0(1M)	100224041	Standard length: 1m Thickness 1.3mm		Material: Steel Surface: Color Galvanized Can cut into different length
442	Oxide Plated Aluminum DIN Rail	NS35-AL-1.1(1M)	100224035	Standard length: 1m Thickness 1.1mm		Material: Aluminum Surface: Oxide Plated Can cut into different length
443		NS35-AL-1.3(1M)	100224001	Standard length: 1m Thickness 1.3mm		
444		NS35-AL-1.5(1M)	100224003	Standard length: 1m Thickness 1.5mm		
445	Color Galvanized Steel DIN Rail	NS35-S-0.9(1M)	100224038	Standard length: 1m Thickness 0.9mm		Material: Steel Surface: Color Galvanized Can cut into different length
446		NS35-S-1.0(1M)	100224005	Standard length: 1m Thickness 1.0mm		
447		NS35-S-1.2(1M)	100224007	Standard length: 1m Thickness 1.2mm		
448	5*20mm Fuse	RO54(0.5A)	100224012	Ampere option: 0.5, 1, 2, 3, 4, 5, 6, 8, 10A etc		Suitable for: JPT4-HESI, JST4-HESI, JUK10-DREHSI, JASK1EN
449	5*25mm Fuse	RO55(0.5A)	100224021	Ampere option: 0.5, 1, 2, 3, 4, 5, 6, 8, 10A etc		Suitable for: JUK5-HESI
450	Marker Carrier	JB1	Grey:100221002	L45/H47/W9.5mm		For DIN Rail
451	Marker Carrier	JB2(JUBE/D)	Grey:100221003	L45/H45/W20mm		For DIN Rail
452	Marker Carrier	JKLM-A	100221001	L46/H38/W9.5mm		Match with: E/JUK, E/JUK-2
453	End Bracket/Stop	E/JUK	100223001	L43/H36/W9.5mm		Accessory: JKLM-A Marker Holder
454	End Bracket/Stop	E/JUK-2	100223002	L50/H35/W9.4mm		Accessory: JKLM-A Marker Holder
455	End Bracket/Stop Color 	JEW35	100223003	L46.5/H31/W8.5 mm		Marker strip: DEK6 For 35mm Wide DIN Rail
456	<b>Clamp Direct</b> End Bracket/Stop	WKF15	100223010	L24.5/H22.8/W5.2 mm		For 15mm Wide DIN Rail
457	<b>Thin Clamp Direct</b> End Bracket/Stop	WKF35/S	100223009	L49.3/H35.5/W5.2 mm		For 35mm Wide DIN Rail Maker: JKLM3, ZBFM3.5
458	<b>Clamp Direct</b> End Bracket/Stop	WKF35	100223008	L47/H34/W9.5 mm		For 35mm wide DIN Rail JKLM-A Marker Holder ZB10 Marker Strip
459	End Bracket/Stop	249-117	100223007	L43/H35/W10 mm		For 35mm Wide DIN Rail














460	Aluminum End Bracket/Stop	E-JAL	100223004	L58/H44/W10mm		
461	Galvanized Steel DIN Rail Clamp	E/FE-2	100223005	Can be fixed on the DIN Rail		
462	End cover for DIN Rail Black	NS35HT-B	100224009	Cut Resistant		For 35mm DIN Rail 
463	End cover for DIN Rail Transparent	NS35HT-T	100224009T	Cut Resistant		
464	Steel DIN Rail Holder	TSTW	100224010	Thickness 2mm		Material: Steel
465	 Protect Cover	FZ-JUK2.5B	100224031	1 Meter Suitable for: JUK1.5~JUK2.5B		
466	 Protect Cover	FZ-JUK3/10	100224032	1 Meter Suitable for: JUK3N~JUK25		
467	 Cover profile Plate	AP2-TU	100224046	Carrier for AP2-METER		For JUK Series 
468	 Cover profile carrier	AP2-TS35	100224044	Carrier for AP2-METER		
469	 Protect Cover	AP2-METER	100224048	1 Meter		
470	 Cover profile Plate	AP3-TU	100224047	Carrier for AP3-METER		For JUK Series 
471	 Cover profile carrier	AP3-TS35	100224045	Carrier for AP3-METER		
472	 Protect Cover	AP3-METER	100224049	1 Meter		

**NEW**



**Aluminum Power Distribution Block**  
DIN rail mounting, easy wiring  
Good conductivity aluminum conductor  
Support large wires



473	Power Distribution Block	WKL16				
474	Power Distribution Block	WKL35				
475	Power Distribution Block	WKL35/2				
476	Power Distribution Block	WKL16-PE				
477	Power Distribution Block	WKL35-PE				
478	Power Distribution Block	WKL35/2-PE				
479	Power Distribution Block Color  	WKL50	Grey:100421001	800V/145A Cross section: 50mm <sup>2</sup> L51/H42.8/W17.5 mm		Marker Strip: ZB8 Marker Carrier: JKLM3
480	2 Poles Power Distribution Block Color  	WKL50/2	Grey:100421002	800V/145A Cross section: 50mm <sup>2</sup> L51/H42.8/W29.9 mm		Marker Strip: ZB8 Marker Carrier: JKLM3
481	Power Distribution Block Color  	WKL95	Grey:100421003	800V/220A Cross section: 95mm <sup>2</sup> L85/H48.8/W24.2 mm		Marker Strip: ZB8 Marker Carrier: JKLM3
482	2 Poles Power Distribution Block Color  	WKL95/2	Grey:100421004	800V/220A Cross section: 95mm <sup>2</sup> L85/H48.8/W42.6 mm		Marker Strip: ZB8 Marker Carrier: JKLM3

483	Power Distribution Block Color 	WKL150	Grey:100421005	800V/290A Cross section: 150mm <sup>2</sup> L97.4/H57.9/W28.3 mm		Marker Strip: ZB8 Marker Carrier: JKLM3
484	Power Distribution Block Color 	WKL240	Grey:100421006	800V/380A Cross section: 95mm <sup>2</sup> L129.7/H65.2/W36.4 mm		Marker Strip: ZB8 Marker Carrier: JKLM3
485	PE Power Distribution Block Color 	WKL50-PE	100422001	800V/145A Cross section: 50mm <sup>2</sup> L51/H42.8/W17.5 mm		Marker Strip: ZB8 Marker Carrier: JKLM3
486	2 Poles PE Power Distribution Block Color 	WKL50/2-PE	100422002	800V/145A Cross section: 50mm <sup>2</sup> L51/H42.8/W29.9 mm		Marker Strip: ZB8 Marker Carrier: JKLM3
487	PE Power Distribution Block Color 	WKL95-PE	100422003	800V/220A Cross section: 95mm <sup>2</sup> L85/H48.8/W24.2 mm		Marker Strip: ZB8 Marker Carrier: JKLM3
488	2 Poles PE Power Distribution Block Color 	WKL95/2-PE	100422004	800V/220A Cross section: 95mm <sup>2</sup> L85/H48.8/W42.6 mm		Marker Strip: ZB8 Marker Carrier: JKLM3
489	PE Power Distribution Block Color 	WKL150-PE	100422005	800V/290A Cross section: 150mm <sup>2</sup> L97.4/H57.9/W28.3 mm		Marker Strip: ZB8 Marker Carrier: JKLM3
490	PE Power Distribution Block Color 	WKL240-PE	100422006	800V/380A Cross section: 95mm <sup>2</sup> L129.7/H65.2/W36.4 mm		Marker Strip: ZB8 Marker Carrier: JKLM3

UKK/WKH Series  
Power Distribution Box



491	Unipolar Distribution Box	UKK80A	100401001	690V/80A 1 input 6 output L65/H47/W29.5 mm		Input: 1 x 16mm <sup>2</sup> Output: 4 x 6mm <sup>2</sup> 2 x 16mm <sup>2</sup>
492	Unipolar Distribution Box	UKK125A	100401002	690V/125A 1 input 6 output L74/H47/W29.4 mm		Input: 1 x 16mm <sup>2</sup> 1 x 35mm <sup>2</sup> Output: 6 x 16mm <sup>2</sup>
493	Unipolar Distribution Box	UKK160A	100401003	690V/160A 1 input 6 output L74/H47/W29.4 mm		Input: 1 x 70mm <sup>2</sup> 1 x 16mm <sup>2</sup> Output: 6 x 16mm <sup>2</sup>
494	Unipolar Distribution Box	UKK250A	100401004	690V/250A 1 input 11 output L96/H50/W47.8 mm		Input: 1 x 120mm <sup>2</sup> Output: 2 x 35mm <sup>2</sup> 5 x 16mm <sup>2</sup> 4 x 10mm <sup>2</sup>
495	Unipolar Distribution Box	UKK400A	100401005	690V/400A 1 input 11 output L96/H50/W47.8 mm		Input: 1 x 185mm <sup>2</sup> Output: 2 x 35mm <sup>2</sup> 5 x 16mm <sup>2</sup> 4 x 10mm <sup>2</sup>
496	Unipolar Distribution Box	UKK500A	100401006	690V/500A 1 input 11 output L96/H50/W47.8 mm		Input: 3 x 15mm <sup>2</sup> 8 x 24mm <sup>2</sup> Output: 2 x 35mm <sup>2</sup> 5 x 16mm <sup>2</sup> , 4 x 10mm <sup>2</sup>
497	Power Distribution Box	WKH-207	100402001	500V/125A Cross section: 35mm <sup>2</sup> L67/H50/W45 mm		Hole Qty: 2 x 7 Brass Bar: 6.5 x 12mm
498	Power Distribution Box	WKH-211	100402002	500V/125A Cross section: 35mm <sup>2</sup> L100/H50/W45 mm		Hole Qty: 2 x 11 Brass Bar: 6.5 x 12mm
499	Power Distribution Box	WKH-215	100402003	500V/125A Cross section: 35mm <sup>2</sup> L134/H50/W45 mm		Hole Qty: 2 x 15 Brass Bar: 6.5 x 12mm
500	Power Distribution Box	WKH-407	100402004	500V/125A Cross section: 35mm <sup>2</sup> L67/H50/W90 mm		Hole Qty: 4 x 7 Brass Bar: 6.5 x 12mm
501	Power Distribution Box	WKH-411	100402005	500V/125A Cross section: 35mm <sup>2</sup> L100/H50/W90 mm		Hole Qty: 4 x 11 Brass Bar: 6.5 x 12mm

502	Power Distribution Box	WKH-415	100402006	500V/125A Cross section: 35mm <sup>2</sup> L134/H50/W90 mm		Hole Qty: 4 x 15 Brass Bar : 6.5 x 12mm
503	Power Distribution Box	WKH-413	100402007	500V/160A Cross section: 35mm <sup>2</sup> L180/H73/W138 mm		Hole Qty: 4 x 13 Brass Bar : 8 x 17mm
504	Power Distribution Block	WKH-200A	100402008	500V/200A Cross section: 75mm <sup>2</sup> L280/H115/W190 mm		Hole Qty: 4 x 11 Brass Bar : 4 x 15mm
505	Power Distribution Block	WKH-250A	100402009	500V/250A Cross section: 100mm <sup>2</sup> L280/H115/W190 mm		Hole Qty: 4 x 11 Brass Bar : 5 x 20mm
506	Power Distribution Block	WKH-400A	100402010	500V/400A Cross section: 185mm <sup>2</sup> L280/H115/W180 mm		Hole Qty: 4 x 10 Brass Bar : 6 x 25mm
<p>Tools WKC series WKT series</p> 						
507	VE Crimp Tool	WKC8(10-4)	104101001	Square shape after crimped For cross section: 0.25-10mm <sup>2</sup>		
508	VE Crimp Tool	WKC8(6-6)	104101002	Hexagon shape after crimped For cross section: 0.25-6mm <sup>2</sup>		
509	Cutting plier Tool Cut FBS accessories	WKT3.5-6Q	104102001	Suitable for: FBS 10-3.5 FBS 10-4 FBS 10-5 FBS 10-6		
510	Cutting plier Tool Cut FBS accessories	WKT6-10Q	104102002	Suitable for: FBS 10-6 FBS 10-8 FBS 10-10		
511	 Automatic wire stripper	HS-700B	104101003	Suitable for: 0.5-6mm <sup>2</sup>		
512	2.5*75 Slot Screw driver	WKT2.5*75	104103001			
513	5*100 Slot Screw driver	WKT5*100	104103002			
514	DIN Rail Cutter	WKT-NS02	100224011	Suitable for DIN Rail: NS 35-AL-1.5 NS 35-S-1.0		Other specification can be customized.
515	Automatic wire stripping and pressing machine	WKT2.5VE	104101101	Suitable for Solid wire 0.5-4mm <sup>2</sup> Ferrules, soft wire 0.5-2.5mm <sup>2</sup>		
516	WKDQ WONKE CUSTOMIZED PEN			<b>Two Options:</b> Black ball pen Black gel pen		

**NEW**



**WHE/WHASeries Heavy Duty Connector**  
**6-8 Side entry/Top entry**  
**Push-in Type/Screw Type**  
 -Water-proof,anti-rust and anti-corrosion  
 -Sliver-plated contacts



No.	PART NO.	Order No.	Entry Side	Number of contact	Description	Water-proof connector	Panel Installation Dimension (mm)	Picture
-----	----------	-----------	------------	-------------------	-------------	-----------------------	-----------------------------------	---------

**WHA Heavy-duty connector**

Voltage/Current: 4、5、6 contacts (230V/10A), 8 contacts (230V/16A)

Surface: Sliver-plated

Contact resistance: ≤1m Ω

Cross section: 1.0-2.5mm<sup>2</sup> (AWG 18-14) For 4/5 contacts

0.14-4.0mm<sup>2</sup> (AWG 26-12) For 6/8 contacts




**1 set including above accessories;**  
**6/8 pins type will provide separated ferrule pins.**

1	WHA04C	100506001	Side entry	4	3+1ground	PG11		
2	WHA05C	100506002	Side entry	5	4+1ground	M20		
3	WHA06C	100506003	Side entry	6	5+1ground	M20		
4	WHA08C	100506004	Side entry	8	7+1ground	M20		
5	WHA04D	100506005	Top entry	4	3+1ground	PG11		
6	WHA05D	100506006	Top entry	5	4+1ground	M20		
7	WHA06D	100506007	Top entry	6	5+1ground	M20		
8	WHA08D	100506008	Top entry	8	7+1ground	M20		
9	WHA04W	100506009	Horizontal	4	3+1ground	PG11		
10	WHA05W	100506010	Horizontal	5	4+1ground	M20		
11	WHA06W	100506011	Horizontal	6	5+1ground	M20		
12	WHA08W	100506012	Horizontal	8	7+1ground	M20		
13	WHA04WD	100506013	Horizontal Butt	4	3+1ground	PG11		
14	WHA05WD	100506014	Horizontal Butt	5	4+1ground	PG11		
15	WHA06WD	100506015	Horizontal Butt	6	5+1ground	PG11		
16	WHA08WD	100506016	Horizontal Butt	8	7+1ground	PG11		
17	WHA04DJ	100506017	Docking	4	3+1ground	PG11	<p>No Panel Installation</p>	
18	WHA05DJ	100506018	Docking	5	4+1ground	M20		
19	WHA06DJ	100506019	Docking	6	5+1ground	M20		
20	WHA08DJ	100506020	Docking	8	7+1ground	M20		


**WHA Heavy Duty Male/Female Inserts**

13	WHA04X	100506021	Male+Female	4	3+1ground	Suitable for WHA04D, WHA04C, WHA04W, WHA04WD, WHA04DJ	
14	WHA05X	100506022	Male+Female	5	4+1ground	Suitable for WHA05D, WHA05C, WHA05W, WHA05WD, WHA05DJ	
15	WHA06X	100506023	Male+Female	6	5+1ground	Suitable for WHA06D, WHA06C, WHA06W, WHA06WD, WHA06DJ	

16	WHA08X	100506024	Male+Female	8	7+1ground		Suitable for WHA08D, WHA08C, WHA08W, WHA08WD, WHA08DJ						
No.	PART NO.	Order No.	Entry Side	Number of contact	Water-proof connector	A (mm)	B (mm)	C (mm)	E (mm)	F (mm)	G (mm)	d (mm)	Picture





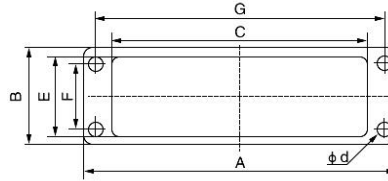

### WHE\*\*/P Push-in Heavy-duty connector

Voltage/Current: 500V/16A  
 Surface: Sliver-plated  
 Contact resistance:  $\leq 1m\Omega$   
 Cross section: 1.0-2.5mm<sup>2</sup> (AWG 18-14)  
 Tightening torque: 0.5Nm  
 Stripping length: 7mm









Panel Installation size:

**PUSH IN TOOL FREE WI**


25	WHE06C/P	100507001	Side entry	6	PG13.5	80.0	43.0	52.2	35.0	32.0	70.0	4.3	
26	WHE06D/P	100507002	Top entry	6	PG13.5	80.0	43.0	52.2	35.0	32.0	70.0	4.3	
27	WHE10C/P	100507003	Side entry	10	PG16	93.0	43.0	65.2	35.0	32.0	83.0	4.3	
28	WHE10D/P	100507004	Top entry	10	PG16	93.0	43.0	65.2	35.0	32.0	83.0	4.3	
29	WHE16C/P	100507005	Side entry	16	PG21	113.0	43.0	85.5	35.0	32.0	103.0	4.3	
30	WHE16D/P	100507006	Top entry	16	PG21	113.0	43.0	85.5	35.0	32.0	103.0	4.3	
31	WHE24C/P	100507007	Side entry	24	PG21	140.0	43.0	112.2	35.0	32.0	130.0	4.3	
32	WHE24D/P	100507008	Top entry	24	PG21	140.0	43.0	112.2	35.0	32.0	130.0	4.3	
33	WHE32C/P	100507009	Side entry	32	PG29	113.0	80.5	86.0	73.0	60.0	103.0	4.5	
34	WHE32D/P	100507010	Top entry	32	PG29	113.0	80.5	86.0	73.0	60.0	103.0	4.5	
35	WHE48C/P	100507011	Side entry	48	PG29	140.0	80.5	113.0	73.0	60.0	130.0	4.5	
36	WHE48D/P	100507012	Top entry	48	PG29	140.0	80.5	113.0	73.0	60.0	130.0	4.5	

### WHE\*\*/P Heavy Duty Male/Female Inserts

37	WHE06X/P	100507013	Male+Female	6	Insertion for WHE06C/P, WHE06D/P								
38	WHE10X/P	100507014	Male+Female	10	Insertion for WHE10C/P, WHE10D/P								
39	WHE16X/P	100507015	Male+Female	16	Insertion for WHE16C/P, WHE16D/P								
40	WHE24X/P	100507016	Male+Female	24	Insertion for WHE24C/P, WHE24D/P								
41	WHE32X/P	100507017	Male+Female	32	Insertion for WHE32C/P, WHE32D/P								
42	WHE48X/P	100507018	Male+Female	48	Insertion for WHE48C/P, WHE48D/P								
No.	PART NO.	Order No.	Entry Side	Number of contact	Water-proof connector	A (mm)	B (mm)	C (mm)	E (mm)	F (mm)	G (mm)	d (mm)	Picture

### WHE Heavy-duty connector



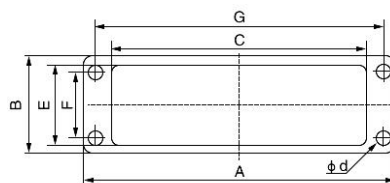



Voltage/Current: 500V/16A  
 Surface: Sliver-plated  
 Contact resistance:  $\leq 1m\Omega$   
 Cross section: 1.0-2.5mm<sup>2</sup> (AWG 18-14)  
 Tightening torque: 0.5Nm  
 Stripping length: 7mm









Panel Installation size:

**With male/female i**



1	WHE06C	100505001	Side entry	6	PG13.5	80.0	43.0	52.2	35.0	32.0	70.0	4.3	
2	WHE06D	100505002	Top entry	6	PG13.5	80.0	43.0	52.2	35.0	32.0	70.0	4.3	
3	WHE10C	100505003	Side entry	10	PG16	93.0	43.0	65.2	35.0	32.0	83.0	4.3	
4	WHE10D	100505004	Top entry	10	PG16	93.0	43.0	65.2	35.0	32.0	83.0	4.3	
5	WHE16C	100505005	Side entry	16	PG21	113.0	43.0	85.5	35.0	32.0	103.0	4.3	
6	WHE16D	100505006	Top entry	16	PG21	113.0	43.0	85.5	35.0	32.0	103.0	4.3	
7	WHE24C	100505007	Side entry	24	PG21	140.0	43.0	112.2	35.0	32.0	130.0	4.3	
8	WHE24D	100505008	Top entry	24	PG21	140.0	43.0	112.2	35.0	32.0	130.0	4.3	
9	WHE32C	100505009	Side entry	32	PG29	113.0	80.5	86.0	73.0	60.0	103.0	4.5	
10	WHE32D	100505010	Top entry	32	PG29	113.0	80.5	86.0	73.0	60.0	103.0	4.5	
11	WHE48C	100505011	Side entry	48	PG29	140.0	80.5	113.0	73.0	60.0	130.0	4.5	
12	WHE48D	100505012	Top entry	48	PG29	140.0	80.5	113.0	73.0	60.0	130.0	4.5	

### WHE Heavy Duty Male/Female Inserts

13	WHE06X	100505013	Male+Female	6	Insertion for WHE06C/WHE06D							
14	WHE10X	100505014	Male+Female	10	Insertion for WHE10C/WHE10D							
15	WHE16X	100505015	Male+Female	16	Insertion for WHE16C/WHE16D							
16	WHE24X	100505016	Male+Female	24	Insertion for WHE24C/WHE24D							
17	WHE32X	100505017	Male+Female	32	Insertion for WHE32C/WHE32D							
18	WHE48X	100505018	Male+Female	48	Insertion for WHE48C/WHE48D							



No.	PART NO.	Order No.	Cross Section (mm <sup>2</sup> )	L (mm)	F (mm)	W (mm)	D (mm)	C (mm)	package
-----	----------	-----------	----------------------------------	--------	--------	--------	--------	--------	---------

**VE series cold pressed terminal block**  
**Color as follows for your choice:**

**VE Red Copper+Nylon**

1	VE0308-A	100301001	0.3mm <sup>2</sup>	12.4	8.0	1.9	1.1	0.8	1000 pcs per bag
2	VE0508-A	100301002	0.5mm <sup>2</sup>	14.0	8.0	2.5	1.3	1.0	1000 pcs per bag
3	VE0510-A	100301008	0.5mm <sup>2</sup>	16.0	10.0	2.5	1.3	1.0	1000 pcs per bag
4	VE0512-A	100301013	0.5mm <sup>2</sup>	18.0	12.0	2.6	1.3	1.0	1000 pcs per bag
5	VE7508-A	100301003	0.75mm <sup>2</sup>	14.6	8.0	2.8	1.5	1.2	1000 pcs per bag
6	VE7510-A	100301009	0.75mm <sup>2</sup>	16.4	10.0	2.8	1.5	1.2	1000 pcs per bag
7	VE7512-A	100301014	0.75mm <sup>2</sup>	18.4	12.0	2.8	1.5	1.2	1000 pcs per bag
8	VE1008-A	100301004	1.0mm <sup>2</sup>	14.3	8.0	2.8	1.7	1.4	1000 pcs per bag
9	VE1010-A	100301010	1.0mm <sup>2</sup>	16.3	10.0	3.0	1.7	1.4	1000 pcs per bag
10	VE1012-A	100301015	1.0mm <sup>2</sup>	19.3	12.0	3.0	1.7	1.4	1000 pcs per bag
11	VE1508-A	100301005	1.5mm <sup>2</sup>	14.6	8.0	3.5	2.0	1.7	1000 pcs per bag
12	VE1510-A	100301011	1.5mm <sup>2</sup>	16.4	10.0	3.5	2.0	1.7	1000 pcs per bag
13	VE1512-A	100301016	1.5mm <sup>2</sup>	18.4	12.0	3.5	2.0	1.7	1000 pcs per bag
14	VE2508-A	100301006	2.5mm <sup>2</sup>	15.2	8.0	4.0	2.6	2.3	1000 pcs per bag
15	VE2510-A	100301012	2.5mm <sup>2</sup>	17.2	10.0	4.0	2.6	2.3	1000 pcs per bag
16	VE2512-A	100301017	2.5mm <sup>2</sup>	19.2	12.0	4.0	2.6	2.3	1000 pcs per bag
17	VE4009-A	100301018	4.0mm <sup>2</sup>	16.5	9.0	4.4	3.2	2.8	1000 pcs per bag
18	VE4012-A	100301019	4.0mm <sup>2</sup>	19.5	12.0	4.4	3.2	2.8	1000 pcs per bag
19	VE6010-A	100301020	6.0mm <sup>2</sup>	18.0	10.0	6.3	3.9	3.5	1000 pcs per bag
20	VE6012-A	100301021	6.0mm <sup>2</sup>	20	12	6.3	3.9	6.5	1000 pcs per bag
21	VE10-12-A	100301031	10mm <sup>2</sup>	22	12	7.5	4.9	4.5	1000 pcs per bag
22	VE10-18-A	100301032	10mm <sup>2</sup>	26	18	7.5	4.9	4.5	1000 pcs per bag
23	VE16-12-A	100301033	16mm <sup>2</sup>	22	12	8.7	6	5.8	500 pcs per bag
24	VE16-18-A	100301034	16mm <sup>2</sup>	28	18	8.7	6	5.8	500 pcs per bag

25	VE25-12-A	100301043	25mm <sup>2</sup>	24	12	11	7.9	7.5	200 pcs per bag
26	VE25-16-A	100301035	25mm <sup>2</sup>	28	16	11	7.9	7.5	200 pcs per bag
27	VE35-25-A	100301045	35mm <sup>2</sup>	25	30	12.5	8.7	8.3	200 pcs per bag
28	VE50-20-A	100301044	50mm <sup>2</sup>	20	36	16	10.9	10.3	100 pcs per bag


### VE Brass+Nylon





1	VE0508-B	100302002	0.5mm <sup>2</sup>	14.0	8.0	2.5	1.3	1.0	1000 pcs per bag
2	VE0510-B	100302008	0.5mm <sup>2</sup>	16.0	10.0	2.5	1.3	1.0	1000 pcs per bag
3	VE0512-B	100302013	0.5mm <sup>2</sup>	18.0	12.0	2.6	1.3	1.0	1000 pcs per bag
4	VE7508-B	100302003	0.75mm <sup>2</sup>	14.6	8.0	2.8	1.5	1.2	1000 pcs per bag
5	VE7510-B	100302009	0.75mm <sup>2</sup>	16.4	10.0	2.8	1.5	1.2	1000 pcs per bag
6	VE7512-B	100301014	0.75mm <sup>2</sup>	18.4	12.0	2.8	1.5	1.2	1000 pcs per bag
7	VE1008-B	100302004	1.0mm <sup>2</sup>	14.3	8.0	2.8	1.7	1.4	1000 pcs per bag
8	VE1010-B	100302010	1.0mm <sup>2</sup>	16.3	10.0	3.0	1.7	1.4	1000 pcs per bag
9	VE1012-B	100302015	1.0mm <sup>2</sup>	19.3	12.0	3.0	1.7	1.4	1000 pcs per bag
10	VE1508-B	100302005	1.5mm <sup>2</sup>	14.6	8.0	3.5	2.0	1.7	1000 pcs per bag
11	VE1510-B	100302011	1.5mm <sup>2</sup>	16.4	10.0	3.5	2.0	1.7	1000 pcs per bag
12	VE1512-B	100302016	1.5mm <sup>2</sup>	18.4	12.0	3.5	2.0	1.7	1000 pcs per bag
13	VE2508-B	100302006	2.5mm <sup>2</sup>	15.2	8.0	4.0	2.6	2.3	1000 pcs per bag
14	VE2510-B	100302012	2.5mm <sup>2</sup>	17.2	10.0	4.0	2.6	2.3	1000 pcs per bag
15	VE2512-B	100302017	2.5mm <sup>2</sup>	19.2	12.0	4.0	2.6	2.3	1000 pcs per bag
16	VE4009-B	100302018	4.0mm <sup>2</sup>	16.5	9.0	4.4	3.2	2.8	1000 pcs per bag
17	VE4012-B	100302019	4.0mm <sup>2</sup>	19.5	12.0	4.4	3.2	2.8	1000 pcs per bag
18	VE6010-B	100302020	6.0mm <sup>2</sup>	18.0	10.0	6.3	3.9	3.5	1000 pcs per bag
19	VE6012-B	100302021	6.0mm <sup>2</sup>	20	12	6.3	3.9	6.5	1000 pcs per bag
20	VE10-12-B	100302031	10mm <sup>2</sup>	22	12	7.5	4.9	4.5	1000 pcs per bag
21	VE10-18-B	100302032	10mm <sup>2</sup>	26	18	7.5	4.9	4.5	1000 pcs per bag
22	VE16-12-B	100302033	16mm <sup>2</sup>	22	12	8.7	6	5.8	500 pcs per bag
23	VE16-18-B	100302034	16mm <sup>2</sup>	28	18	8.7	6	5.8	500 pcs per bag
24	VE25-12-B	100302039	25mm <sup>2</sup>	24	12	11	7.9	7.5	200 pcs per bag
25	VE25-16-B	100302035	25mm <sup>2</sup>	28	16	11	7.9	7.5	200 pcs per bag
26	VE35-16-B	100302037	35mm <sup>2</sup>	16	30	12.5	8.7	8.3	200 pcs per bag
27	VE50-20-B	100302041	50mm <sup>2</sup>	20	36	16	10.9	10.3	100 pcs per bag

**TE series Double Ferrule terminal block**  
**Color as follows for your choice:**



**Red Copper+Nylon**



No.	PART NO.	Order No.	Cross Section (mm <sup>2</sup> )	L (mm)	F (mm)	W (mm)	B (mm)	D (mm)	C (mm)	package
1	TE0508-A	100303001	2*0.5	14.5	8.0	5.0	6.5	1.8	1.5	1000 pcs per bag
2	TE0510-A	100303006	2*0.5	16.5	10.0	5.0	6.5	1.8	1.5	1000 pcs per bag
3	TE0512-A	100303011	2*0.5	18.5	12.0	5.0	6.5	1.8	1.5	1000 pcs per bag
4	TE7508-A	100303002	2*0.75	14.7	8.0	5.5	6.7	2.1	1.8	1000 pcs per bag
5	TE7510-A	100303007	2*0.75	16.7	10.0	5.5	6.7	2.1	1.8	1000 pcs per bag
6	TE7512-A	100303012	2*0.75	18.7	12.0	5.5	6.7	2.1	1.8	1000 pcs per bag
7	TE1008-A	100303003	2*1.0	15.1	8.0	5.5	7.1	2.3	2.0	1000 pcs per bag
8	TE1010-A	100303008	2*1.0	17.1	10.0	5.5	7.1	2.3	2.0	1000 pcs per bag
9	TE1012-A	100303013	2*1.0	19.1	12.0	5.5	7.1	2.3	2.0	1000 pcs per bag
10	TE1508-A	100303004	2*1.5	15.5	8.0	6.4	7.2	2.6	2.3	1000 pcs per bag
11	TE1510-A	100303009	2*1.5	17.5	10.0	6.4	7.5	2.6	2.3	1000 pcs per bag
12	TE1512-A	100303014	2*1.5	19.5	12.0	6.4	7.5	2.6	2.3	1000 pcs per bag
13	TE2508-A	100303005	2*2.5	16.5	8.0	8.0	8.5	3.3	2.9	1000 pcs per bag
14	TE2510-A	100303010	2*2.5	18.5	10.0	8.0	8.5	3.3	2.9	1000 pcs per bag
15	TE2512-A	100303015	2*2.5	20.5	12.0	8.0	8.5	3.3	2.9	1000 pcs per bag
16	TE4012-A	100303016	2*4.0	23.1	12.0	8.8	11.1	4.2	3.8	1000 pcs per bag
17	TE6014-A	100303020	2*6.0	26.1	14.0	9.5	12.1	5.3	4.9	1000 pcs per bag
18	TE10-14-A	100303019	2*10	26.1	14.0	12.6	12.6	6.9	6.5	500 pcs per bag
19	TE16-14-A	100303021	2*16	31.3	14.0	19.0	17.3	8.7	8.3	200 pcs per bag
No.	PART NO.	Order No.	Material	Content						package
1	WKF1200-A	100301046	Copper With MOQ	VE0508 White *200pcs ,VE7508 Grey *200pcs VE1008 Red *200pcs, VE1508 Black *250pcs VE2508 Blue *250pcs ,VE10-12 Red *25pcs VE60-12 Yellow *25pcs						
2	WKF1200-B	100302042	Brass							
3	WKF1800-A	100301047	Copper With MOQ	VE0508 White *500pcs , VE7508 Grey *400pcs VE1008 Red *350pcs, VE1508 Black *300pcs VE2508 Blue *100pcs , VE4009 Grey*70pcs VE6012 Yellow *50pcs, VE10-12 Red *30pcs						
4	WKF1800-B	100302043	Brass							
5	WKR420-A	100305026	Copper With MOQ	RV1.25-4 Red *50pcs, RV2-5 Blue *50pcs RV2-4 Blue *50pcs, RV1.25-8 Red *20pcs RV5.5-6 Yellow *20pcs, RV3.5-6 Black *20pcs RV1.25-5 Red *50pcs, RV5.5-8 Yellow *20pcs RV2-6 Blue *30pcs, RV1.25-3 Red *50pcs RV1.25-6 Red *30pcs, RV3.5-4 Black *30pcs						
6	WKR420-B	100306025	Brass							
7	WKS430-A	100307016	Copper With MOQ	SV1.25-3 Red *50pcs, SV2-5 Blue *40pcs SV2-4 Blue *50pcs, SV1.25-4 Red *50pcs SV3.5-4 Black *30pcs, SV5.5-6 Yellow *20pcs SV5.5-4 Yellow *20pcs, SV2-3 Blue *50pcs SV1.25-6 Red *30pcs, SV3.5-6 Black *20pcs SV2-6 Blue *30pcs, SV1.25-5 Red *40pcs						
8	WKS430-B	100308016	Brass							


Available in more types:



# Waterproof Connector (Threaded coupling)

IP Grade: Ip68

The contacts can be male or female

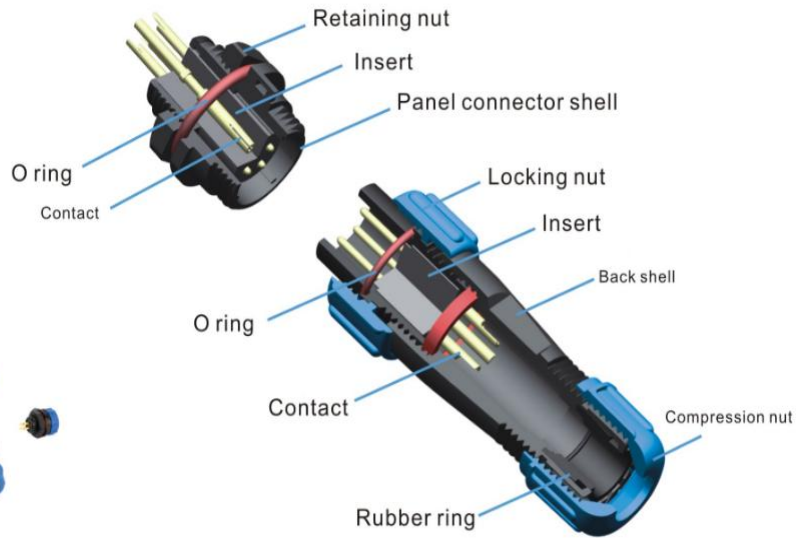









WK11 Series Cable outer diameter range: 4-6.5mm				
Description		Male Plug (Main)	Rear-nut socket (Matching)	Docking socket (Matching)
Picture				
Contacts				
2pins	Part No.	WK11CP2X	WK11PS2X	WK11RS2X
	Order No.	100901001	100901003	100901005
3pins	Part No.	WK11CP3X	WK11PS3X	WK11RS3X
	Order No.	100901007	100901009	100901011
4pins	Part No.	WK11CP4X	WK11PS4X	WK11RS4X
	Order No.	100901013	100901015	100901017
5pins	Part No.	WK11CP5X	WK11PS5X	WK11RS5X
	Order No.	100901019	100901021	100901023
Opposite direction can be customized				

WK13 Series Cable outer diameter range: 4-6.5mm				
Description		Male Plug (Main)	Rear-nut socket (Matching)	Docking socket (Matching)
Picture				
Contacts				
2pins	Part No.	WK13CP2X	WK13PS2X	WK13RS2X
	Order No.	100902001	100902003	100902005
3pins	Part No.	WK13CP3X	WK13PS3X	WK13RS3X
	Order No.	100902007	100902009	100902011
4pins	Part No.	WK13CP4X	WK13PS4X	WK13RS4X
	Order No.			





















Material and specification	
Coupling	Threaded
Shell material	PC, Nylon66, fire resistance: V-0
Insert material	PPS, max temperature 260 °C
Contact material	Brass with gold plating
Termination	Solder: WK11, WK13, WK17, WK21, WK29
	WK11: 4-6.5 WK13: 4-6.5mm(Standard), 5-8mm(Customized) WK17: 6-10mm WK21: 7-12mm, 4.5-7mm(Customized) WK29: 13-16mm
IP rating	IP 68
Temperature range	-40°C ~ +85°C
Mating cycle	500
Insulation resistance	2000MΩ

## Waterproof connector part no. List













- |           |           |           |           |
|-----------|-----------|-----------|-----------|
| <b>WK</b> | <b>13</b> | <b>CP</b> | <b>7X</b> |
| ①         | ②         | ③         | ④         |
- 1 - WK= WKDQ brand, Circular Waterproof Connector, Threaded coupling.
  - 2 - Installation dimension code, 13=13mm
  - 3 - Series configuration code  
 CP=Cable plug                      CS=Cable socket  
 PP=Rear-nut mount plug          PS=Rear-nut socket  
 RP=Cable docking plug          RS=Cable docking socket  
 NP=Angled cable plug          NS=Angled cable socket  
 FP=Flange panel plug          FS=Flange panel socket  
 SP=Square panel plug          SS=Square panel socket
  - 4 - Number of contact

4pin: 	Order No.	100902013	100902015	100902017
	Part No.	WK13CP5X	WK13PS5X	WK13RS5X
5pins: 	Order No.	100902019	100902021	100902023
	Part No.	WK13CP6X	WK13PS6X	WK13RS6X
6pins: 	Order No.	100902025	100902027	100902029
	Part No.	WK13CP7X	WK13PS7X	WK13RS7X
7pins: 	Order No.	100902031	100902033	100902035
	Part No.	WK13CP9X	WK13PS9X	WK13RS9X
9pins: 	Order No.	100902037	100902039	100902041
<b>Opposite direction can be customized</b>				



























**WK17 Series**  
Cable outer diameter range: 6-10mm

Decsription		Male Plug (Main)	Rear-nut socket (Matching)	Docking socket (Matching)	Angled docking socket (Matching)	Flange rear-nut socket (Matching)	Square rear-nut socket (Matching)
Picture Contacts							
2pin: 	Part No.	WK17CP2X	WK17PS2X	WK17RS2X	WK17NS2X	WK17FS2X	WK17SS2X
	Order No.	100903001	100903003	100903005	100903007	100903009	100903011
3pins: 	Part No.	WK17CP3X	WK17PS3X	WK17RS3X	WK17NS3X	WK17FS3X	WK17SS3X
	Order No.	100903013	100903015	100903017	100903019	100903021	100903023
4pin: 	Part No.	WK17CP4X	WK17PS4X	WK17RS4X	WK17NS4X	WK17FS4X	WK17SS4X
	Order No.	100903025	100903027	100903029	100903031	100903033	100903035
5pins: 	Part No.	WK17CP5X	WK17PS5X	WK17RS5X	WK17NS5X	WK17FS5X	WK17SS5X
	Order No.	100903037	100903039	100903041	100903043	100903045	100903047
6pin: 	Part No.	WK17CP6X	WK17PS6X	WK17RS6X	WK17NS6X	WK17FS6X	WK17SS6X
	Order No.	100903100	100903099	100903098	100903104	100903097	100903107
7pins: 	Part No.	WK17CP7X	WK17PS7X	WK17RS7X	WK17NS7X	WK17FS7X	WK17SS7X
	Order No.	100903049	100903051	100903053	100903055	100903057	100903059
9pins: 	Part No.	WK17CP9X	WK17PS9X	WK17RS9X	WK17NS9X	WK17FS9X	WK17SS9X
	Order No.	100903061	100903063	100903065	100903067	100903069	100903071
10pin: 	Part No.	WK17CP10X	WK17PS10X	WK17RS10X	WK17NS10X	WK17FS10X	WK17SS10X
	Order No.	100903073	100903075	100903077	100903079	100903081	100903083
<b>Opposite direction can be customized</b>							

**WK21 Series**  
Cable outer diameter range: 7-12mm

Description		Male Plug (Main)	Rear-nut socket (Matching)	Docking socket (Matching)	Angled docking socket (Matching)	Flange rear-nut socket (Matching)	Square rear-nut socket (Matching)
Picture Contacts							
2pins	Part No.	WK21CP2X	WK21PS2X	WK21RS2X	WK21NS2X	WK21FS2X	WK21SS2X
	Order No.	100904001	100904003	100904005	100904007	100904009	100904011
3pins	Part No.	WK21CP3X	WK21PS3X	WK21RS3X	WK21NS3X	WK21FS3X	WK21SS3X
	Order No.	100904013	100904015	100904017	100904019	100904021	100904023
4pin	Part No.	WK21CP4X	WK21PS4X	WK21RS4X	WK21NS4X	WK21FS4X	WK21SS4X
	Order No.	100904025	100904027	100904029	100904031	100904033	100904035
5pins	Part No.	WK21CP5X	WK21PS5X	WK21RS5X	WK21NS5X	WK21FS5X	WK21SS5X
	Order No.	100904037	100904039	100904041	100904043	100904045	100904047
5B pins	Part No.	WK21CP5BX	WK21PS5BX	WK21RS5BX	WK21NS5BX	WK21FS5BX	WK21SS5BX
	Order No.	100904049	100904051	100904053	100904055	100904057	100904059
5C pins	Part No.	WK21CP5CX	WK21PS5CX	WK21RS5CX	WK21NS5CX	WK21FS5CX	WK21SS5CX
	Order No.	100904061	100904063	100904065	100904067	100904069	100904071
7pins	Part No.	WK21CP7X	WK21PS7X	WK21RS7X	WK21NS7X	WK21FS7X	WK21SS7X
	Order No.	100904073	100904075	100904077	100904079	100904081	100904083
9pins	Part No.	WK21CP9X	WK21PS9X	WK21RS9X	WK21NS9X	WK21FS9X	WK21SS9X
	Order No.	100904085	100904087	100904089	100904091	100904093	100904095
12pin	Part No.	WK21CP12X	WK21PS12X	WK21RS12X	WK21NS12X	WK21FS12X	WK21SS12X
	Order No.	100904109	100904111	100904113	100904115	100904117	100904119
Opposite direction can be customized							



























**WK29 Series**  
Cable outer diameter range: 13-16mm































Decsription		Male Plug (Main)	Rear-nut socket (Matching)	Docking socket (Matching)	Angled docking socket (Matching)	Flange rear-nut socket (Matching)	Square rear-nut socket (Matching)
Picture Contacts							
2pi 	Part No.	WK29CP2X	WK29PS2X	WK29RS2X	WK29NS2X	WK29FS2X	WK29SS2X
	Order No.	100905001	100905003	100905005	100905007	100905009	100905011
3pi 	Part No.	WK29CP3X	WK29PS3X	WK29RS3X	WK29NS3X	WK29FS3X	WK29SS3X
	Order No.	100905013	100905015	100905017	100905019	100905021	100905023
4pi 	Part No.	WK29CP4X	WK29PS4X	WK29RS4X	WK29NS4X	WK29FS4X	WK29SS4X
	Order No.	100905025	100905027	100905029	100905031	100905033	100905035
7pi 	Part No.	WK29CP7X	WK29PS7X	WK29RS7X	WK29NS7X	WK29FS7X	WK29SS7X
	Order No.	100904073	100904075	100904077	100904079	100904081	100904083
8pin 	Part No.	WK29CP8X	WK29PS8X	WK29RS8X	WK29NS8X	WK29FS8X	WK29SS8X
	Order No.	100905049	100905051	100905053	100905055	100905057	100905059
9pi 	Part No.	WK29CP9X	WK29PS9X	WK29RS9X	WK29NS9X	WK29FS9X	WK29SS9X
	Order No.	100905061	100905063	100905065	100905067	100905069	100905071
10 pin 	Part No.	WK29CP10X	WK29PS10X	WK29RS10X	WK29NS10X	WK29FS10X	WK29SS10X
	Order No.	100905073	100905075	100905077	100905079	100905081	100905083
10B pin 	Part No.	WK29CP10BX	WK29PS10BX	WK29RS10BX	WK29NS10BX	WK29FS10BX	WK29SS10BX
	Order No.	100905085	100905087	100905089	100905091	100905093	100905095
12pi 	Part No.	WK29CP12X	WK29PS12X	WK29RS12X	WK29NS12X	WK29FS12X	WK29SS12X
	Order No.	100905097	100905099	100905101	100905103	100905105	100905107
16pi 	Part No.	WK29CP16X	WK29PS16X	WK29RS16X	WK29NS16X	WK29FS16X	WK29SS16X
	Order No.	100905109	100905111	100905113	100905115	100905117	100905119
17pi 	Part No.	WK29CP17X	WK29PS17X	WK29RS17X	WK29NS17X	WK29FS17X	WK29SS17X
	Order No.	100905121	100905123	100905125	100905127	100905129	100905131
20pi 	Part No.	WK29CP20X	WK29PS20X	WK29RS20X	WK29NS20X	WK29FS20X	WK29SS20X
	Order No.	100905133	100905135	100905137	100905139	100905141	100905143
24pi 	Part No.	WK29CP24X	WK29PS24X	WK29RS24X	WK29NS24X	WK29FS24X	WK29SS24X
	Order No.	100905145	100905147	100905149	100905151	100905153	100905155
26pi 	Part No.	WK29CP26X	WK29PS26X	WK29RS26X	WK29NS26X	WK29FS26X	WK29SS26X
	Order No.	100905157	100905159	100905161	100905163	100905165	100905167
Opposite direction can be customized							






No.	ITEM	PART NO.	Order No.	DETAIL	PIC.	Remark
1	Push-in Connector	773-102	100501001	400V/24A Cross section:2.5mm <sup>2</sup> L19.5/W13.1/H9.2 mm		Available in PC material
2	Push-in Connector	773-104	100501002	400V/24A Cross section:2.5mm <sup>2</sup> L19.5/W13/H13.1 mm		Available in PC material
3	Push-in Connector	773-106	100501003	400V/24A Cross section:2.5mm <sup>2</sup> L19.5/W18.8/H13.1 mm		Available in PC material
4	Push-in Connector	773-108	100501004	400V/24A Cross section:2.5mm <sup>2</sup> L19.5/W24.2/H13.1 mm		Available in PC material
5	Push-in Connector	773-173	100501005	400V/24A Cross section:6mm <sup>2</sup> L25.6/W20.1/H14.2 mm		Available in PC material
6	Push-in Connector	773-174	100501006	400V/32A Cross section:6mm <sup>2</sup> L33.5/W20.1/H10.2 mm		
7	Push-in Connector	773-602	100501007	400V/32A Cross section:4mm <sup>2</sup> L19.5/W13.1/H9.2 mm		
8	Push-in Connector	773-604	100501008	400V/32A Cross section:4mm <sup>2</sup> L19.5/W13/H13.1 mm		
9	Push-in Connector	773-606	100501009	400V/32A Cross section:4mm <sup>2</sup> L19.5/W18.8/H13.1 mm		
10	Push-in Connector	2273-202	100501010	450V24A Cross section:2.5mm <sup>2</sup> L16.5/W10/H5.8mm		
11	Push-in Connector	2273-203	100501011	450V24A Cross section:2.5mm <sup>2</sup> L16.5/W14/H5.8mm		
12	Push-in Connector	2273-204	100501012	450V24A Cross section:2.5mm <sup>2</sup> L16.5/W18/H5.8mm		
13	Push-in Connector	2273-205	100501013	450V24A Cross section:2.5mm <sup>2</sup> L16.5/W22/H5.8mm		
14	Push-in Connector	2273-206	100501014	450V24A Cross section:2.5mm <sup>2</sup> L16.7/W14/H5.8mm		
15	Push-in Connector	2273-208	100501015	450V24A Cross section:2.5mm <sup>2</sup> L16.7/W18/H5.8mm		
16	Compact splicing connector	221-412	100501016	400V/32A Cross section:4mm <sup>2</sup> L19.1/W13.1/H9.9mm		Material: PC+PA66
17	Compact splicing connector	221-413	100501017	400V/32A Cross section:4mm <sup>2</sup> L19.1/W18.6/H9.9mm		Material: PC+PA66
18	Compact splicing connector	221-414	100501018	400V/32A Cross section:4mm <sup>2</sup> L19.1/W24.3/H9.9mm		Material: PC+PA66
19	Compact splicing connector	221-415	100501019	400V/32A Cross section:4mm <sup>2</sup> L19.1/W29.9/H9.9mm		Material: PC+PA66

20	Compact splicing connector	221-662	100501049	450V/40A Cross section: 6mm <sup>2</sup> L21.5/W15.6/H11mm		
21	Compact splicing connector	221-663	100501050	450V/40A Cross section: 6mm <sup>2</sup> L21.5/W22.1/H11mm		
22	Compact splicing connector	221-664	100501051	450V/40A Cross section: 6mm <sup>2</sup> L21.5/W28.6/H11mm		
23	Compact splicing connector	221-665	100501052	450V/40A Cross section: 6mm <sup>2</sup> L21.5/W35.1/H11mm		
24	Compact splicing connector	221-Y612	1005101073	450V/41A Cross section: 6mm <sup>2</sup> L45.8/W22.4/H12mm		 handle color: Orange Green
25	Compact splicing connector	221-Y613	450V/41A Cross section: 6mm <sup>2</sup> L45.8/W22.4/H12mm			
26	Compact splicing connector	221-Y614	450V/41A Cross section: 6mm <sup>2</sup> L45.8/W29.4/H12mm			
27	Compact splicing connector	221-Y615	1005101076	450V/41A Cross section: 6mm <sup>2</sup> L45.8/W35.9/H12mm		Other color can customize
28	Compact splicing connector	221-H61	1005101077	450V/41A Cross section: 6mm <sup>2</sup> L45.8/W9/H12mm		 handle color: Orange Green
29	Compact splicing connector	221-H62	1005101078	450V/41A Cross section: 6mm <sup>2</sup> L45.8/W17.9/H12mm		
30	Compact splicing connector	221-H63	1005101080	450V/41A Cross section: 6mm <sup>2</sup> L45.8/W26.8/H12mm		 221-H63W3 1005101081 Other color can customize:
31	Compact splicing connector	221-Y624	1005101082	450V/41A Cross section: 6mm <sup>2</sup> L45.8/W31.3/H12mm		
32	Compact splicing connector	221-Y626	1005101083	450V/41A Cross section: 6mm <sup>2</sup> L45.8/W44.8/H12mm		
33	Compact splicing connector	221-Y636	1005101084	450V/41A Cross section: 6mm <sup>2</sup> L45.8/W46.9/H12mm		
34	Compact splicing connector	221-Y639	1005101085	450V/41A Cross section: 6mm <sup>2</sup> L45.8/W67.1/H12mm		
35	Compact splicing connector	222-412	100501020	400V/32A Cross section:2.5mm <sup>2</sup> L20.5/W12.4/H14.5 mm		Available in PC material
36	Compact splicing connector	222-413	100501021	400V/32A Cross section:2.5mm <sup>2</sup> L20.5/W17/H14.5 mm		Available in PC material
37	Compact splicing connector	222-414	100501022	400V/32A Cross section:2.5mm <sup>2</sup> L20.5/W20.85/H14.5 mm		Available in PC material
38	Compact splicing connector	222-415	100501023	400V/32A Cross section:2.5mm <sup>2</sup> L20.5/W26.6/H14.5 mm		Available in PC material
39	Compact splicing connector	222-418	100501024	400V/32A Cross section:2.5mm <sup>2</sup> L20.5/W40 /H14.5mm		
40	Compact splicing connector	222-422	100501025	400V/32A Cross section:4mm <sup>2</sup> L39/W13.5 /H14.5mm		Available in Colors handles
41	Compact splicing connector	222-423	100501026	400V/32A Cross section:4mm <sup>2</sup> L39.5/W18.6 /H14.5mm		

42	Compact splicing connector with DIN Rail Feet	222-211	100501027	400V/32A Cross section:4mm <sup>2</sup> L43/W8/H31mm		
43	Compact splicing connector with DIN Rail Feet	222-212	100501028	400V/32A Cross section:4mm <sup>2</sup> L43/W13/H31mm		
44	Compact splicing connector with DIN Rail Feet	222-213	100501029	400V/32A Cross section:4mm <sup>2</sup> L43/W18/H31mm		
45	Compact splicing connector	222-P421	100501030	400V/32A Cross section:4mm <sup>2</sup>		 Can joint together
46	Compact splicing connector	222-P422	100501031	400V/32A Cross section:4mm <sup>2</sup>		 Can joint together
47	Compact splicing connector	222-P423	100501032	400V/32A Cross section:4mm <sup>2</sup>		 Can joint together
48	Compact splicing connector	222-P424	100501071	400V/32A Cross section:4mm <sup>2</sup>		 Can joint together
49	Compact splicing connector	222-P425	100501072	400V/32A Cross section:4mm <sup>2</sup>		 Can joint together
50	Splicing connector	222-T11	100501057	0.08-4mm <sup>2</sup>		
51	One input two out Splicing connector	222-F12	100501058	0.08-4mm <sup>2</sup>		Other color: Grey Handle color: Orange, Blue, Yellow
52	One input three out Splicing connector	222-F13	100501059	0.08-4mm <sup>2</sup>		Other color: Grey Handle color: Orange, Blue, Yellow
53	One input four out Splicing connector	222-F14	100501060	0.08-4mm <sup>2</sup>		Other color: Grey Handle color: Orange, Blue, Yellow
54	One input five out Splicing connector	222-F15	100501061	0.08-4mm <sup>2</sup>		Other color: Grey Handle color: Orange, Blue, Yellow
55	Two input four out Splicing connector (Assembled from 2 pcs 222-F12)	222-F24	100501062	0.08-4mm <sup>2</sup>		Other color: Grey
56	Two input six out Splicing connector (Assembled from 2 pcs 222-F13)	222-F26	100501064	0.08-4mm <sup>2</sup>		Other color: Grey
57	Two input eight out Splicing connector (Assembled from 2 pcs 222-F14)	222-F28	100501065	0.08-4mm <sup>2</sup>		Other color: Grey
58	Two input ten out Splicing connector (Assembled from 2 pcs 222-F15)	222-F210	100501066	0.08-4mm <sup>2</sup>		Other color: Grey
59	Three input six out Splicing connector (Assembled from 3 pcs 222-F12)	222-F36	100501067	0.08-4mm <sup>2</sup>		Other color: Grey
60	Three input nine out Splicing connector (Assembled from 3 pcs 222-F13)	222-F39	100501068	0.08-4mm <sup>2</sup>		Other color: Grey
61	Push-in Connector	FCT-252	100501033	L19.5/W11/H10mm		
62	Push-in Connector	FCT-253	100501034	L20/W14.3/H9.8mm		
63	Push-in Connector	FCT-254	100501035	L20/W17.5/H9.8mm		

64	Push-in Connector	FCT-255	100501036	L19.5/W21.5/H9.8mm		
65	Lighting connector	224-101	100501037	400V/24A Cross section:2.5mm <sup>2</sup> L20.5/W8.5/H15.5 mm		Available in PC material 
66	Lighting connector	224-112	100501038	400V/24A Cross section:2.5mm <sup>2</sup> L20.5/W10/H15.5 mm		Available in PC material 
67	Lighting connector	224-201	100501039	400V/24A Cross section:2.5mm <sup>2</sup> L42/W8.5/H15.5 mm		Available in PC material 
68	Mounting Carrier for 222 series	222-500	100501040	L66/W26 mm		
69	Mounting Carrier with Strain relief plate for 222 series	222-500+222-505	100501041	L67.5/W52 mm		
70	Mounting Carrier for 773 series	773-322	100501042	L66/W26 mm		
71	Mounting Carrier with Strain relief plate for 773 series	773-322+222-505	100501043	L67.5/W52 mm		
72	Strain relief plate	222-505	100501044	L67.5/W52 mm		
73	Carrier for fixing on panel	222-41	100501045	For 222-412, 222-413. 222-414, 222-415, 222-418		
74	Carrier for fixing on panel	222-42	100501046	Carrier for 222-422, 222-423		
75	DIN Rail Carrier	222-K41	100501047	For 222-412, 222-413. 222-414, 222-415, 222-418		
76	DIN Rail Carrier	222-K42	100501048	Carrier for 222-T**, 222-P**, 222-F** seires		
77	Carrier for fixing on panel	222-Z43	100501063	For 222-T**, 222-P**, 222-F** seires		

Fan filter  
Cabinet ventilation system  
230VAC 240VAC



No.	ITEM	PART NO.	Order No.	DETAIL	PIC.	REF.
<b>Cabinet Fan and Filters, standard color RAL7032, can custom make RAL7035. OEM service is supported</b>						
1	Air Filter Panel	FK3321.300	102101001	Installation size: 92x92 mm		Surface size:116.5x116.5 mm For 92mm Fan IP54
2	Fan and Filter 230V, 110V	FK3321.230	102102001	Installation size: 92x92 mm		Surface size:116.5x116.5 mm Equipe with Fan size: 92x92x25 mm IP54
3	Air Filter Panel	FK3322.300	102101002	Installation size: 124x124 mm		Surface size:148.5x148.5 mm For 120mm fan IP54
4	Fan and Filter 230V, 110V	FK3322.230	102102002	Installation size: 124x124 mm		Surface size:148.5x148.5 mm Equipe with Fan size: 120x120x38 mm IP54
5	Air Filter Panel	FK3323.300	102101003	Installation size: 177x177 mm		Surface size:204x204 mm For 120mm fan IP54
6	Fan and Filter 230V, 110V	FK3323.230	102102003	Installation size: 177x177 mm		Surface size:204x204 mm Equipe with Fan size: 120x120x38 mm IP54
7	Air Filter Panel	FK3325.300	102101005	Installation size: 224x224 mm		Surface size:255x255 mm For 172mm fan IP54
8	Fan and Filter 230V, 110V	FK3325.230	102102004	Installation size: 224x224 mm		Surface size:255x255 mm Equipe with Fan size: 172x150x51 mm IP54
9	Air Filter Panel	FK3326.300	102101007	Installation size: 290x290 mm		Surface size:320x320 mm For 225mm fan IP54
10	Fan and Filter 230V, 110V	FK3326.230	102102005	Installation size: 290x290 mm		Surface size: 320x320 mm Equipe with Fan size: 225x225x80mm IP54
11	Air Filter Panel with Rubber seal	FK9803.300	102101009	Installation size: 122x122 mm		Surface size: 148.5x148.5 mm For 120mm fan IP54
12	Fan and Filter with Rubber seal 230V, 110V	FK9803.230	102102006	Installation size: 122x122 mm		Surface size: 148.5x148.5 mm Equipe with Fan size: 120x120x38 mm IP54
13	Air Filter Panel with Rubber seal	FK9804.300	102101010	Installation size: 175x175 mm		Surface size:: 204x204 mm For 172mm fan IP54
14	Fan and Filter with Rubber seal 230V, 110V	FK9804.230 (17251)	102102007	Installation size: 175x175 mm		Surface size:204x204 mm Equipe with Fan size: 172x150x51 mm IP54
15	Air Filter Panel with Rubber seal	FK9805.300	102101011	Installation size: 223x223 mm		Surface size:255x255 mm For 172mm fan IP54
16	Fan and Filter with Rubber seal 230V, 110V	FK9805.230	102102008	Installation size: 223x223 mm		Surface size:255x255 mm Equipe with Fan size: 172x150x51 mm IP54
17	Air Filter Panel with Rubber seal	FK9806.300	102101012	Installation size: 283x283 mm		Surface size: 320x320 mm IP54