


CE RED FCC REACH

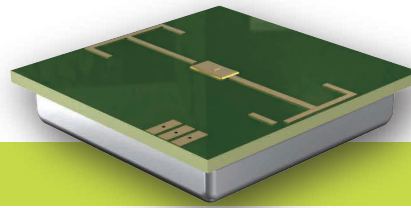

PD-V6 180° 5.8GHz Microwave Motion Sensor

Application

- Intelligent switch
- Wall-hung switch
- Automatic light
- Intruder detect

Feature and advantage

- Small volume
- Low wireless power output
- Low power consumption
- Non-contact detection
- Easy to connect with the controller
- Low noise output

PD-V6 5.8GHz 180° Microwave Motion Sensor is a C-Band Bi-Static Doppler transceiver module. It's built-in Resonator Oscillator (CRO). This module, which uses the built-in amplifier circuit and directly outputs amplification signal, V6 adopts flat Plane Antenna, suitable for wall mounting. It can improve its front signal receiving ability and reduce its flank blind area. Its performance is better than the sensors in the market.

This module is ideally suitable for occupancy sensor in automatic lighting switches. It can also be used for ceiling mount intruder detectors.


According with EN 300440-V2.1.1、EN 62479: 2010, RED directive-2014/53/eu

According with FCC Part 15.249


According with EN 62321, ROHS directive-2011/65/eu

According with REACH directive-1907/2006/ec


Antenna Beam Pattern

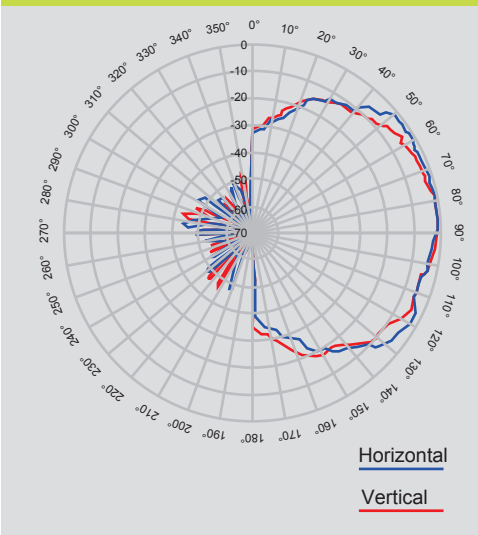

Products size

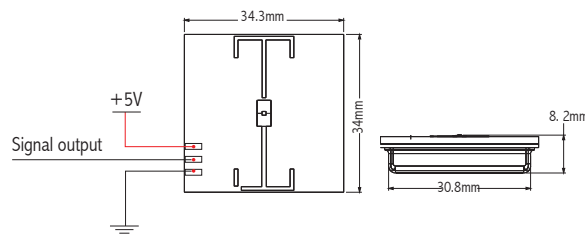

Block diagram and connection



Parameter	Notes	Min	Typ	Max	Units
Frequency Setting	1	5.75	5.80	5.85	GHz
Radiated Power (EIRP)	1	0.10	0.12	0.15	mW
Settling Time		5		10	mS
Received Signal Strength	2	100	150	200	μVp-p
Noise	3	80	150	180	mVrms
Supply Voltage		4.75	5.00	5.25	VDC
Current Consumption		18	20	23	mA
Pulse Repetition Frequency	4	2.0	2.2	3.0	KHz
Pulse Width	4	15	50	70	μSec
Operating Temperature		-15	22	75	°C
Weight		9.5	10	10.5	g

Note1: The radiated emissions is designed to meet FCC rules.

Note2: The Received Signal Strength (RSS) is measured at the total 1 Ways path loss of 70dB.

Note3: The noise voltages are measured from 10Hz to 100Hz at the Output port, inside an Anechoic chamber.

Note4: Pulse operation

Ningbo Pdlux Electronic Technology CO.,Ltd

Add: 17F, Commerce Building of NingBo,
No 588, South Tiantong Rode, Yinzhou District, Ningbo, China

Tel: 86-574-83008608(20 lines) Fax: 86-574-83008609
Email: pdlux@pdlux.com Web: www.pdlux.com