



Integrated Hopper Loader

Integrated Hopper Loader: AUMAX AML-300G single phase combined vacuum autoloader machine is used to transport plastic resin material from bags or storage tank into hopper dryer which installed on the injection molding machines. AML-300G Hopper Loader adopts high efficiency big power motor with carbon brushes which can convey plastic material with capacity 200-300Kg/ hour. The autoloader

machine equipped with micro computer system and SCHNEIDER contactors for stable control of the machine.

Integrated Hopper Loader

1. Integrated Hopper Loader Introduction

AUMAX AML-300G single phase combined vacuum autoloader machine is used to transport plastic resin material from bags or storage tank into hopper dryer which installed on the injection molding machines. AML-300G Hopper Loader adopts high efficiency big power motor with carbon brushes which can convey plastic material with capacity 200-300Kg/ hour. The autoloader machine equipped with micro computer system and SCHNEIDER contactors for stable control of the machine.

2. Integrated Hopper Loader Parameter (Specifications)

Model	Motor		Capacity (Kg/h)	Hopper Size (L)	Pipe diameter (mm)	Dimensions (mm)	Weight (Kg)
	Type	Power					
AML-300G	Carbon Brush	1.5HP/1Phase	300	6	Ø38	550x 400 x350	20

Please excuse for not note if some specifications of products are changed!

Note:

- 1) The test condition of conveying capacity: vertical distance 4 meters, horizontal distance 1 meter.
- 2) The standard power voltage for AML-300G is 1Ø 220~230V 50/60Hz.

Ningbo Aumax Plastic Machinery Co., Ltd

Address: No. 216, Lianhe Rd., Ningbo Economic & Tech Development Zone, Beilun, Ningbo, China

Phone: +86-13819843291


Tel: +86-574-26850648

Fax: +86-574-26855258

E-mail: sales@aumax-plast.com

3. Integrated Hopper Loader Features & Application

INSTALLATION DIAGRAM AML-300G AML-400G

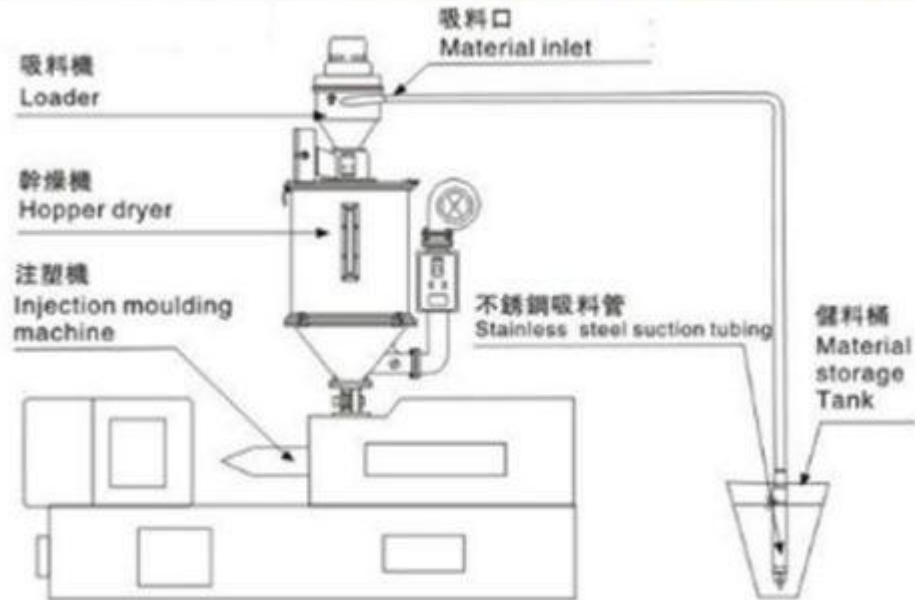

1. AML-300G Combined vacuum autoloader equipped with dust filter and dust collecting bag.
2. Integrated structure for easy installation.
3. Machine equipped with wired remote control panel for easy operation and setting.
4. Vacuum hopper made of stainless steel to keep plastic resin without pollution.
5. Large power air pump ensures a big transportation and feeding capacity.

Packing:



Shipping:



Sea Transportation



Air Transportation



Express

6. FAQ

1. Q: What is the MOQ?

A: The MOQ is 1 set for all products..

2. Q: Where is the loading port?

A: The nearest port to our factory is port of Ningbo, China, as well as we can send machine to Yiwu, Shanghai, Guangdong or any other cities in China.

3. Q: What are the payment terms?

A: The preferential payment term is T/T, while other payment terms are negotiable.

4. Q: What are your terms of delivery?

A: We accept FOB, CFR, CIF, EXW, and DDU. You can choose the terms which is the most convenient and cost effective to you.

5. Q: How does your factory carry out quality control?

Ningbo Aumax Plastic Machinery Co., Ltd

Address: No. 216, Lianhe Rd., Ningbo Economic & Tech Development Zone, Beilun, Ningbo, China

Phone: +86-13819843291

Tel: +86-574-26850648

Fax: +86-574-26855258

E-mail: sales@aumax-plast.com



www.aumaxplast.com

A: Powerful R&D teams and professional QC department take care of every detail during design, processing, assembling, testing and packing.

6. Q: Can you supply OEM and customized products?

A: Yes, we can supply OEM / ODM service. Our engineers have rich experience in design and production of plastic auxiliary equipment. We can supply special products according to your ideas and drawings.

7. Q: What about warranty terms?

A: We provide one year warranty for all of our products. During warranty period, if any machine parts damaged due to quality, we will send the new parts by courier immediately by free of charge. Also, we supply 24 hours online service and technical support.

Ningbo Aumax Plastic Machinery Co., Ltd

Address: No. 216, Lianhe Rd., Ningbo Economic & Tech Development Zone, Beilun, Ningbo, China

Phone: +86-13819843291

Tel: +86-574-26850648

Fax: +86-574-26855258

E-mail: sales@aumax-plast.com