



Brass Explosion-proof Cable Gland

You can rest assured to buy customized JIXIANG CONNECTOR® Brass Explosion-proof Cable Gland from us. We look forward to cooperating with you, if you want to know more, you can consult us now, we will reply to you in time! Brass Explosion-proof cable gland are widely used in the fields of marine, oil, gas, and other medium and high voltage transmission systems. JIXIANG CONNECTOR is professional supplier of cable

gland, please don't hesitate to send an inquiry to us.


Product Description

These are related to the JIXIANG CONNECTOR® Brass Explosion-proof Cable Gland news, in which you can learn about the updated information in Brass Explosion-proof Cable Gland, to help you better understand and expand Brass Explosion-proof Cable Gland market. Because the market for Brass Explosion-proof Cable Gland is evolving and changing, so we recommend that you collect our website, and we will show you the latest news on a regular basis. Rich experience QA can help you audit the factory or check the goods quality before shipping.

Brass Explosion-proof Cable Gland

JIXIANG CONNECTOR'S Brass Explosion-proof cable gland are made of nickel plated brass, it could have a good performance on explosion-proof and corrosion, it safeguard your electrical project with commercial grade strain relief.

Brass Explosion-proof Cable Gland Parameter (Specification)

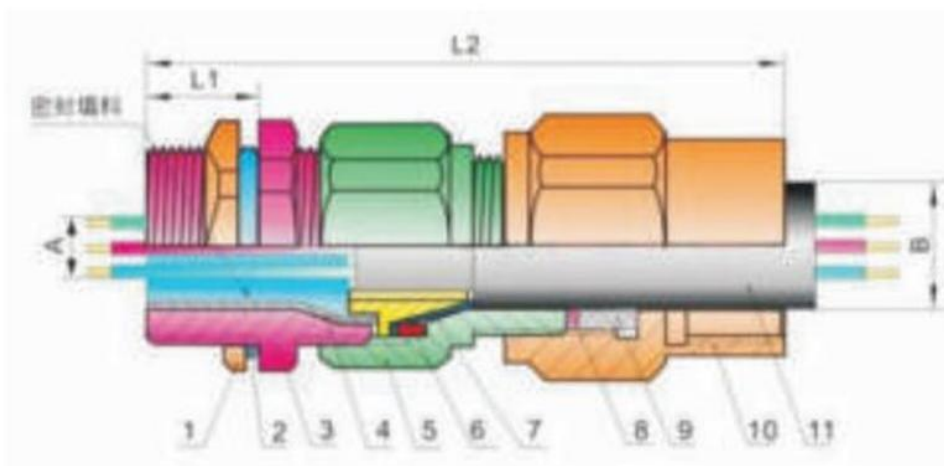

- 1 nut 2 sealing ring 3 inlet connecting body
 4 explosion proof bushing 5 middle connecting body
 6 cover ring 7 taper sleeve 8 gasket 9 seal ring
 10 nut 11 armored cable

The Drawing of Brass Explosion-proof cable gland

EX Standard Gland (JX6)- Metric, G Thread						
Product Code	Thread AG		Outer Diameter of Cable (mm)		Thread length L1(mm)	Length L (mm)
			Outlet A	Incoming Line B		
JX-6-EX-15A	M16*1.5	-	5-8	7-15	15	67
JX-6-EX-15B	M20*1.5	G1/2	5-12	8-15	15	67
JX-6-EX-20	M25*1.5	G3/4	8-17	11-20	15	71
JX-6-EX-27	M32*1.5	G1	11-22	14-27	17	76
JX-6-EX-33	M40*1.5	G1 1/4	14-28	19-33	17	76
JX-6-EX-40	M50*1.5	G1 1/2	16-33	22-40	17	94
JX-6-EX-50	M63*1.5	G2	29-43	29-50	17	98
JX-6-EX-63	M75*1.5	G2 1/2	38-57	35-63	17	112
JX-6-EX-77A	M85*1.5	G3S	38-72	41-77	18	114
JX-6-EX-77B	M90*1.5	G3	38-72	41-77	18	126
JX-6-EX-83	M100*1.5	G4S	48-83	55-90	18	126

JX-6-EX-94	M110*1.5	G4	48-94	61-104	18	128
------------	----------	----	-------	--------	----	-----

More options: Customization of Brass Explosion-proof cable gland is acceptable. It can extended thread length according to customer's requirements. Welcome to inquire.

Brass Explosion-proof Cable Gland Feature And Application

Our Brass Explosion-proof cable gland with quick installation, safety, reliability and other characteristics of good protection, isolating gasket tube in suitable for clamping and fixing steel wire knit of armored cable. It can be used in Hazardous division 1&2.



Gas



Oil



Pharmaceutical



Mining



Transportation

Brass Explosion-proof Cable Gland Details

Thread Specification: Metric Thread, G thread

Tel: +86-18958708338

E-mail: jx5@jxljq.net

Material: Brass or brass with nickel plated

Sealing materials: silicon rubber, NBR

Surface treatment: nickel plating,

Cable: With packing seal

Protection Class: IP66-10 bars

Brass Explosion-proof Cable Gland Qualification

Certificates of Brass Explosion-proof cable gland: ATEX ,EX

Deliver, Shipping And Serving

Delivery of Brass Explosion-proof cable gland Normally 7 working days to 1 month after received the payment.