GL-408 Type Aluminum Tension 95mm2 AAAC ACSR Cable Connector Joints Automatic Splice

Model:GL-408

You can rest assured to buy customized GL-408 Type Aluminum Tension 95mm2 AAAC ACSR Cable Connector Joints Automatic Splice from Jecsany. The Automatic Splice Rated to hold a minimum 95% RBS of the Conductor used, can ensure quick and reliable overhead tension splice with fast and easy installation. The conductor simply slips into color-coded, funnel-shaped end piece and enters the pilot cap automatically with a simple push. The pilot cap guides the conductor pass the set of serrated jaws and into the center . They are used on ACSR, AAC, AAAC conductor for an instant, positive and automatic connection, ANSI C119.4 Full Tension Class A connector.

Product Introduction

China Factory Directly GL-408 Type Aluminum Tension 95mm2 AAAC ACSR Cable Connector Joints Automatic Splice In Stock. Jecsany is a GL-408 Type Aluminum Tension 95mm2 AAAC ACSR Cable Connector Joints Automatic Splice manufacturer and supplier in China. GL-408 is full tension (95% of conductor rated breaking strength unless otherwise stated)

Color-coded funnel rails for easy identification and installation Includes compact conductors of the same size - ASTM-B400. Materials include housing - high-strength aluminum alloy jaws - aluminum alloy, conical box made of aluminum, steel jaws with hardened galvanized. For cable dead end applications with overhead or downstays, recommended for normal grade, Siemens-Martin, high strength utility grade, galvanized and aluminized steel strands.

Product Parameter (Specification)

Type	AAAC (mm²)	Overhead insulated wire (mm²)	ACSR (mm²)	Diameter range (mm)	Color
GL-401				4.68-6.7	Blue
GL-402A	16	16	16	5.59-6.35	Orange
GL-4042A	35	35	35	5.59-8.13	Red/orange
GL-404A	35	35	35	5.84-8.13	Red
GL-406A	50	50	50	9.02-10.16	Yellow
GL4076A				9.02-11.94	Yellow/grey

GL-407	70	70	70	10.16-11.94	Grey
GL-408	95	95	95	11.43-13.46	Black
GL-4098				11.43-15.11	Pink/Black
GL-409A	120	120	120	12.83-15.11	Pink
GL-410	150	150	150	15.32-16.92	Brown
GL-411	150	150	150	16.74-18.39	Green
GL-412	185	185	185	18.34-20.19	Blue
GL-413	240	240	240	19.81-21.79	White
GL-1319A	-	-	240	-	White

Product Feature And Application

Description	Value
Model Number	GL-408
Application	power construction
Usage	power
Structure	Overhead Line Dead
Material	Aluminum Alloy
OEM	Acceptable
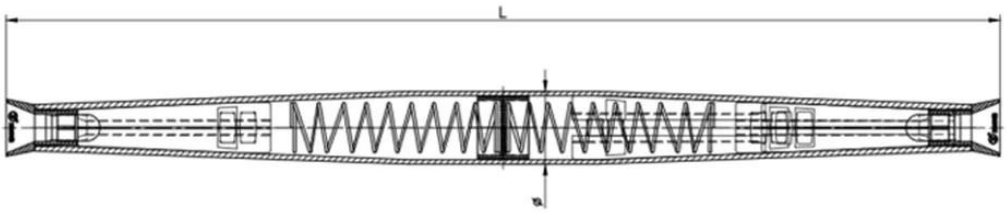
Product Details