



Pre-Insulated Terminal Crimping Ring Bimetal Cable Lugs

Model:CPT AU

Pre-insulated lug (CPTAU) are applicable for LV-ABC lines with insulated conductors, suitable for insulated aluminum conductors in installation of service line system, streetlightning, buildings.

Product Introduction

An aluminium (phase) or aluminium alloy (neutral) sleeve with a stop in the middle.

A black thermoplastic sealed with a flexible elastomer ring.

A neutral contact grease in the tube which improve the contact area and protect the aluminium against oxydation.

The crimping is realized on the plastic part according to the marks on the body of the sleeve.

Product Feature

Material: E-Cu; AI-99.6%

Product property: CPT AU is designed to connect the insulated cable (include ABC cable). It is in accordance with NFC33-02 1.

The waterproof cap can prevent the water into the barrel. It is colored differently to distinguish the cable sizes.

Marked with type, cable size, die size, inner cable length and number of crimping.

Products Parameter (Specification)


Modle	Dimensions(mm)			Length(mm)
	С	В	Ф	L
CPTAU 16-10	16	20	10.5	73
CPTAU 25-12	20	24	13	98.5
CPTAU 35-12	20	24	13	98.5
CPTAU 50-12	20	24	13	98.5
CPTAU 54.6-12	20	24	13	98.5
CPTAU 70-12	20	24	13	98.5
CPTAU 95-12	20	24	13	98.5
CPTAU 120-12	23	30	13	125

Ningbo Jecsany Electrical Equipment Co., Ltd. TEL:+86-574-28909850





CPTAU 150-12	23	30	13	125
CPTAU 180-12	32	35	13	145
CPTAU 240-12	32	35	13	145

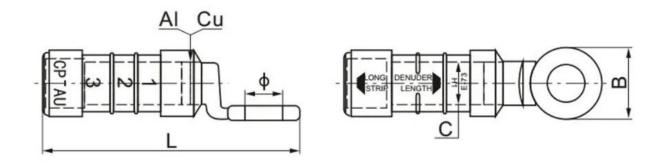

Product Details





